



www.fenos.be

All information in this catalogue is provided for information purposes only and Fenos makes no representations about the accuracy or completeness of the information in this catalogue. Fenos may revise the information and technical data contain herein at any time without notice.

Fazantenstraat 9940 ,46, Evergem, Belgium 🇧🇪

+32 (0) 9 335 81 49
VAT: BE0671.501.997
info@fenos.be

Fenos®

2023-2024



2023 / 2024

Fenos®
Delightful Light

About Fenos

Fenos products are developed by experts with several years of experience in professional lighting design and product design.

Fenos aims to produce lighting fixtures which can fulfill the needs of a professional lighting designer.

Using high end optics to create a variety of light distributions as well as being aesthetically beautiful, makes Fenos among top choices for architectural lighting.

Fenos comes from the word "Fanoos", name of a traditional oil lamp mainly used in Middle East region.

Light Quality


Perfect color rendition is important in many applications, specially in retail and museum lighting. Fenos products are equipped with the latest technology of LEDs to enhance the colour quality.

Space Quality


Visual comfort is the critical part of a space quality, Advanced optics in Fenos ensures a high quality space with limited glare and balanced illuminance.

Product Quality

Well designed and engineered have optimal heat dissipation, this ensures a long life for LEDs.

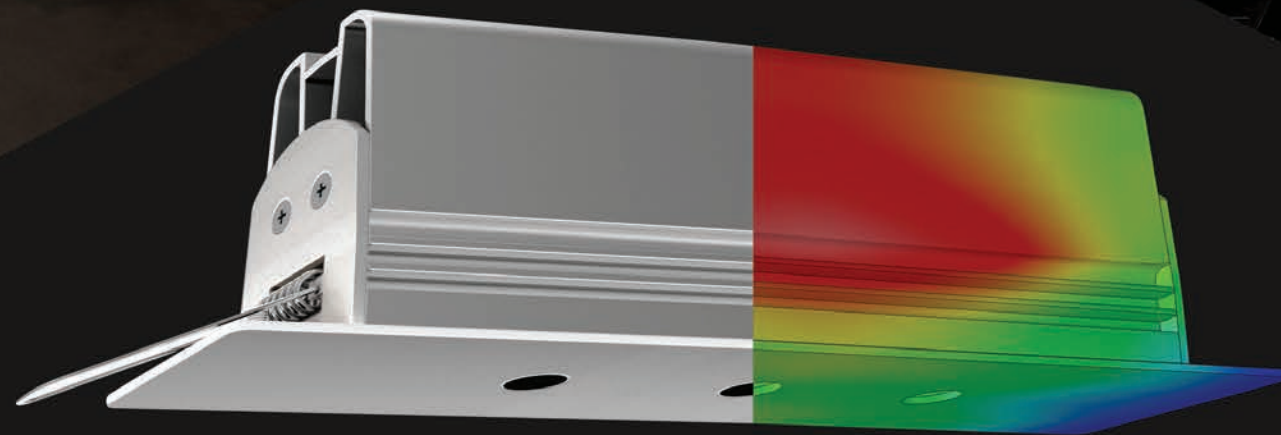


Innovative Products Overview

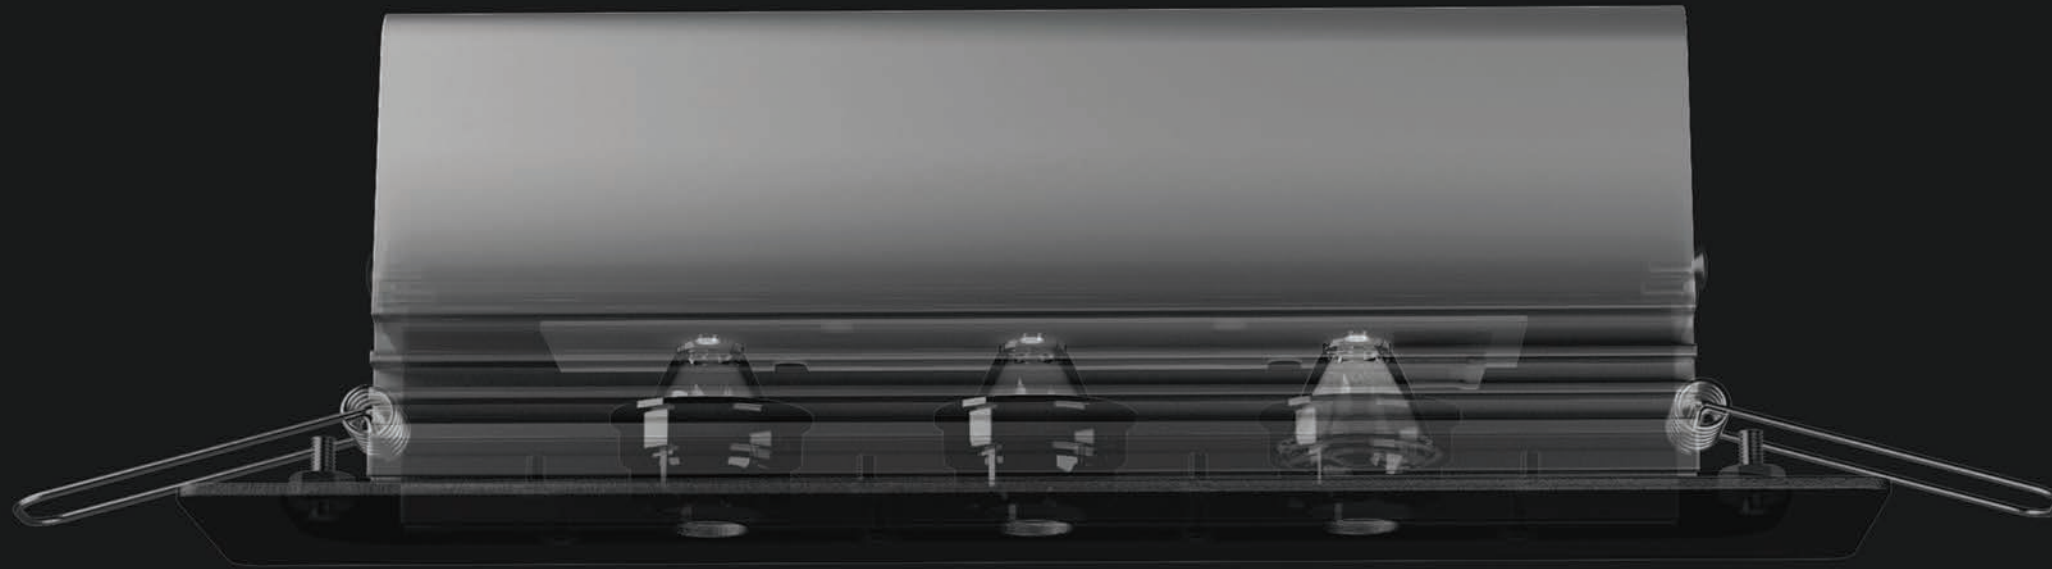

LFO Family

Darklans

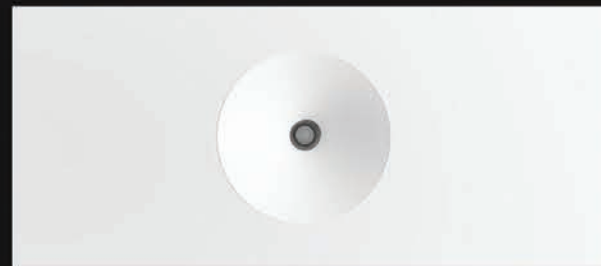

Zhiwer



Oyan



Bartenbach
TECHNOLOGY INSIDE




Engineered and designed by Bartenbach, a leading lighting company in Austria, LFO is designed and calculated in such a way that the light is focused inside the blind and spreads nearly glare-free through the room below. This creates an almost natural light atmosphere. The lens LFO ensures visual comfort by eliminating glare.

GLARE-FREE
LIGHT FROM
AN INVISIBLE
SOURCE

Innovative Products Overview

Vertical Illumination

Vertical illumination is becoming more and more important for architects and lighting designers. It is important for architects because it reveals the feel of the space, and helps the place to be come even more inviting. Fenos offers a wide range of wallwashers with an asymetrical beam for a perfect uniform wallwashing.

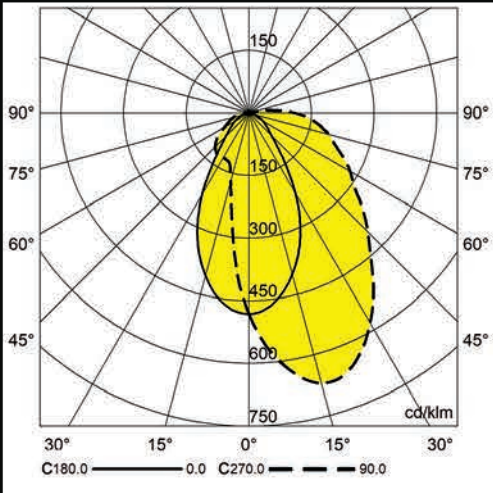

Felka Mini WW



Roni WW



Valman T



Valman




Valman S




Beam Shaping Track lights

Merbo BS is delivered with an integrated primary spot lens and a set of beam shaping secondary optics as well as a honeycomb (to reducing the glare). The desired illumination pattern is generated based on the mounted secondary optic by the end user.

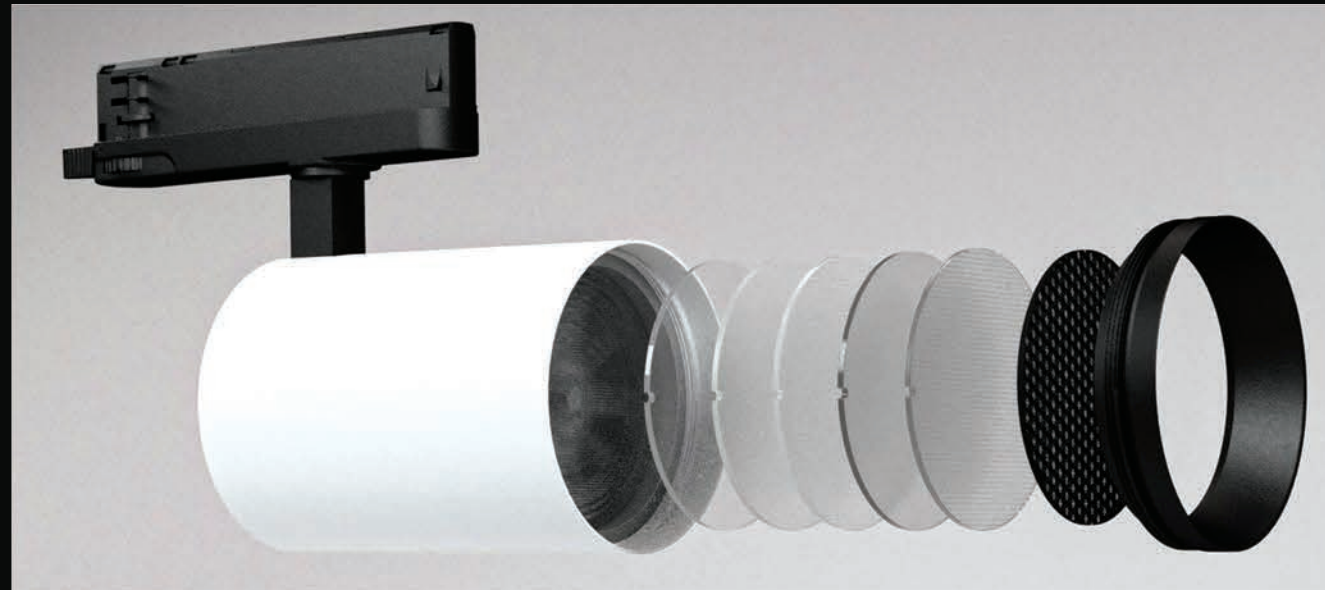


Spot

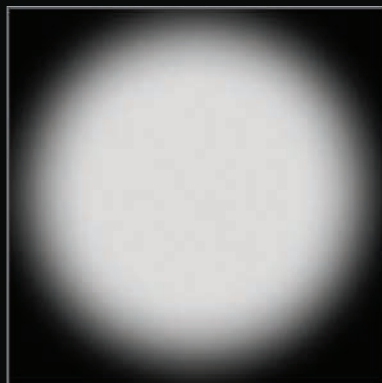

Medium



Wide

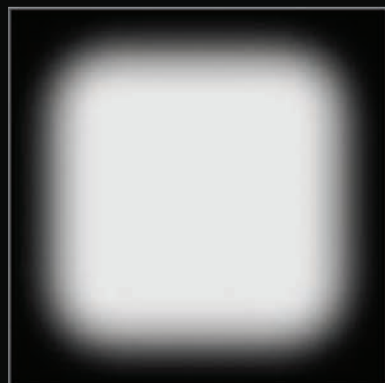

Square



Oval



Acoustic Lighting Solutions

A new range of acoustic lighting solutions are developed to enhance the quality of space
These are made from recycled materials.


Felkana



Sirana



Orma

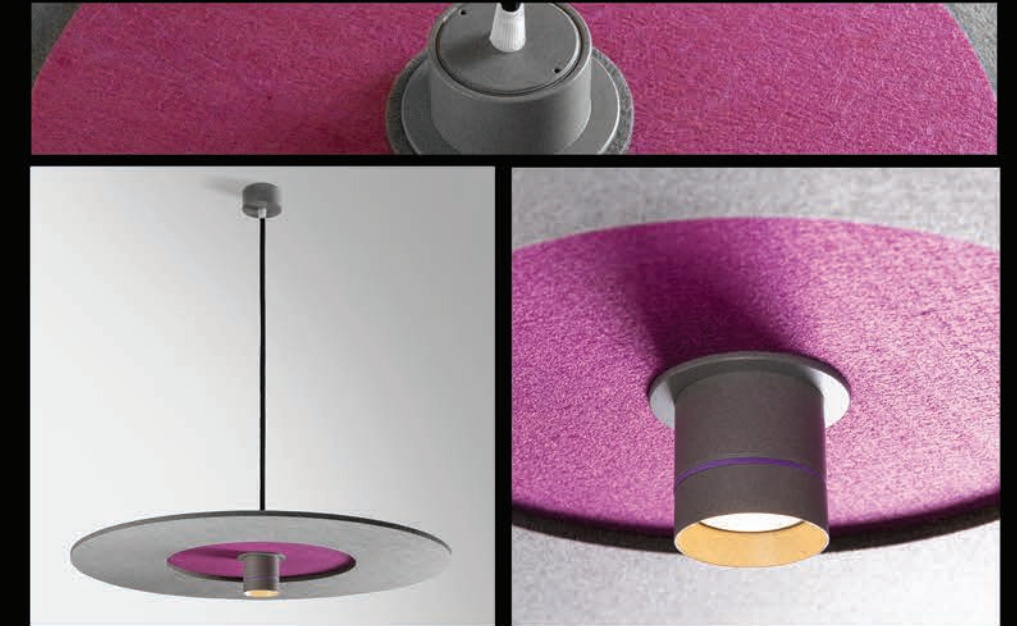

Innovative Products Overview

26





















Darklans . **Oyan** . Silva Maxi . **Zhiwer** . Eyren Mini . Eyren Midi . Sira OL . Eyren Maxi . **Sira S 4090** . Sibron C Micro
Sibron C Midi . **Felkana** . Vaswa Maxi . Sibron CF-TR . **Merbora Mini 60** . Fitran C Mini . Nian . Roni WW . Valman
Merbo Micro RA Twin . Sibron Q Mini . **Valman S** . Sibron Q Midi . Sibron Q Maxi . Eyden Mini . **Arora 60**
Fitran Q . Eyden Mini TR . **Aro CW** . Sira R 6090 . Fitran Q TR . **Fitran Q TR Twin** . Tiran S . Felka Midi S . Tiran S TR
Vaswa Midi . Filde Micro . Sira V 1616 . Filde Mini . **Merbo Micro RA** . Aro RA . Merbo Mini RA . **Felka Micro S**
Felka Mini S . Felka Maxi S . **Tiran S TR Twin** . Aro SA . **Merbo Micro CW-DS** . Sibron C Maxi . Eyren Micro
Aro P . Felka Midi P . **Felka Micro P** . Felka Mini P . Felka Maxi P . Sibron C Mini . **Merbo Micro** . Merbo
Mini Belta . Merbo Midi . Merbo Maxi . **Armo Maxi** . Felka mini . Aro . **Valman T** . **Risen** . **Sira TR 1616**
Sira R 1616 . Torso . Sira R 6040 . **Sira R 4040** . Sira S 6090 . **Merbora Micro 40** . Krab 36 . **Krab 16**
Sira P 4090 . **Sirana Orma** . Vaswa Micro . Silva Midi . Sira S 1616 . **Merbo Micro CW-DR** . Tiran C Mini

New Products



INDEXIndoor

Ceiling Recessed Light


 Darklans	 Oyan	 Zhiwer	 Eyren Micro	 Eyren Mini
 Eyren Midi	 Eyren Maxi	 Sibron C Micro	 Sibron C Mini	 Sibron C Midi
 Sibron C Maxi	 Sibron CF-TR	 Fitran C mini	 Tiran C Mini	 Nian
 Roni WW	 Valman	 Sibron Q Mini	 Sibron Q Midi	 Sibron Q Maxi
 Eyden Mini	 Eyden Mini TR	 Fitran Q	 Fitran Q TR	 Fitran Q TR Twin
 Tiran S	 Tiran S TR	 Tiran SG TR Twin	 Filde Micro	 Filde Mini
 Merbo Micro RA	 Merbo Micro RA Twin	 Merbo Mini RA	 Aro RA	

INDEXIndoor




Surface Mounted

 Felka Micro S	 Felka Mini S	 Felka Midi S	 Felka Maxi S	 Aro S
 Aro SA	 Merbo Micro CW-DR	 Merbo Micro CW-DS	 Aro CW	 Valman S

Pendant Mounted

 Felka Micro P	 Felka Mini P	 Felka Midi P	 Felka Maxi P	 Aro P
---	--	--	--	---

Track Light

 Merbo Micro	 Merbo Mini	 Merbo Midi	 Merbo Maxi & BS Version	 Armo Maxi & BS Version
 Felka Mini	 Belta	 Aro	 Valman T	 Risen

INDEXIndoor

Linear Light



Complementary Products for Linear Lights



Slot Systems



Acoustic Lights



INDEXOutdoor

Outdoor Light



Accessories



INDEXIndoor

Category	Name	Page Number
Ceiling Recessed Light	Darklans	28
	Oyan	34
	Zhiwer	38
	Eyren Micro	42
	Eyren Mini	46
	Eyren Midi	50
	Eyren Maxi	54
	Sibron C Micro	58
	Sibron C Mini	62
	Sibron C Midi	66
	Sibron C Maxi	70
	Sibron CF-TR	74
	Fitran C Mini	80
	Tiran C Mini	84
	Nian	88
	Roni WW	92
	Valman	96
	Sibron Q Mini	100
	Sibron Q Midi	104
	Sibron Q Maxi	108
	Eyden Mini	112
	Eyden Mini TR	116
	Fitran Q	120
	Fitran Q TR	124
	Fitran Q TR Twin	128
	Tiran S	132
	Tiran S TR	136
	Tiran SG TR Twin	140
	Filde Micro	144
	Filde Mini	148
	Merbo Micro RA	154
	Merbo Micro RA Twin	158
	Merbo Mini RA	162
	Aro RA	166
Surface Mounted	Felka Micro S	174
	Felka Mini S	178
	Felka Midi S	182
	Felka Maxi S	186
	Aro S	190
	Aro SA	194
	Merbo Micro CW-DR	198
	Merbo Micro CW-DS	202
	Aro CW	206
	Valman S	210
Pendant Mounted	Felka Micro P	218
	Felka Mini P	222
	Felka Midi P	226
	Felka Maxi P	230
	Aro P	234

INDEXIndoor

Category	Name	Page Number
Track Light	Merbo Micro	240
	Merbo Mini	244
	Merbo Midi	248
	Merbo Maxi & BS Version	252
	Armo Maxi & BS Version	258
	Felka mini	264
	Belta	274
	Aro	278
	Valman T	262
	Risen	266
Linear Light	Sira TR 1616	296
	Sira R 1616	300
	Sira V 1616	304
	Sira S 1616	308
	Sira OL	312
	Sira R 4040	316
	Sira S 4090	322
	Sira P 4090	326
	Sira R 6040	330
	Sira R 6090	334
	Sira S 6090	338
	Sira P 6090	344
Complementary Products for Linear Lights	Merbora Micro 40	350
	Merbora Mini 60	354
	Arora 60	358
Slot Systems	Krab 36	364
	Krab 16	368
Acoustic Lights	Sirana 625	376
	Orma	380
	Felkana	384

INDEXOutdoor

Category	Name	Page Number
Outdoor Light	Vaswa Micro	390
	Vaswa Midi	394
	Vaswa Maxi	398
	Silva Midi	402
	Silva Maxi	406
	Torso	410
Accessories		416



Indoor Lighting

Interior architecture is strongly influenced by lighting. Fenos has a wide range of products for professional indoor lighting with different light distributions, sizes and lumen outputs.

Ceiling Recessed Light

Surface Mounted Light

Pendant Mounted Light

Track Light

Linear Light

Slot Systems

Acoustic Lights

Indoor Lighting

Ceiling Recessed Light



Darklans

Ceiling Recessed



Darklans

Ceiling Recessed

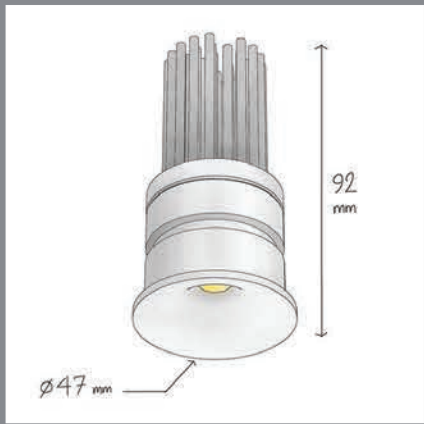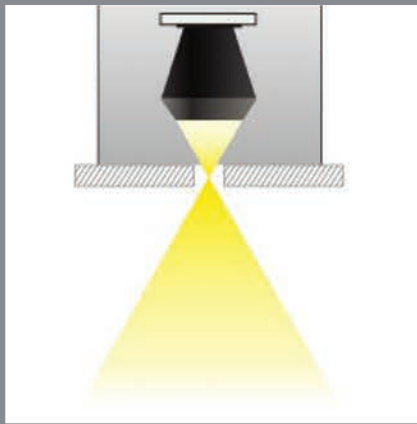

CODE	F180
Light source	LED
Power (W)	9
luminous flux (lm)	800 850
Color Rendering (Ra)	>80
Color Temperature (K)	3000 4000*
Body Color	White Black Silver*

IP 20

70mm

KG

0.27 kg

17 x 13 x 9 cm

Supply Voltage:
220-240 Vac,50Hz

Driver:

DALI | Dimmable version available upon request

Recommended Applications:
Residential | Office | Shop



*Customized body colors and other color temperatures (CCTs) are available upon request

Due to the implementation of a special double focus optic, the light emanates from a remarkably small 10mm diameter orifice. Consequently, the glare of the light has been minimized to a great extent. As a result, when the light is on, it appears as if it is switched off.




▲ Hana Bouitque Hotel / Architect: Persian Garden ▼



Darklans

Light distributions

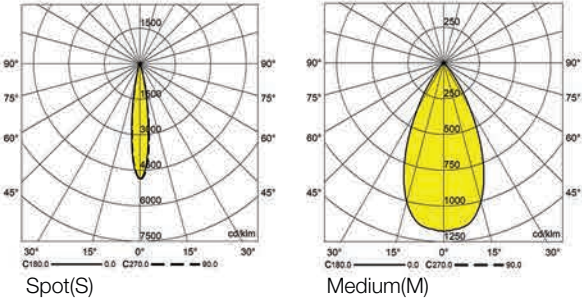

Accessories

Mandatory



Trimless Installation Kit
Order code: 2180924121

Order code table

Body Color	3000K	Beam Angle	4000K	Body Color
White	F180W930S	Spot	F180W940S	White
	F180W930M	Medium	F180W940M	
Body Color	3000K	Beam Angle	4000K	Body Color
Black	F180B930S	Spot	F180B940S	Black
	F180B930M	Medium	F180B940M	
Body Color	3000K	Beam Angle	4000K	Body Color
Silver	F180S930S	Spot	F180S940S	Silver
	F180S930M	Medium	F180S940M	




Oyan

Ceiling Recessed



Oyan

Ceiling Recessed

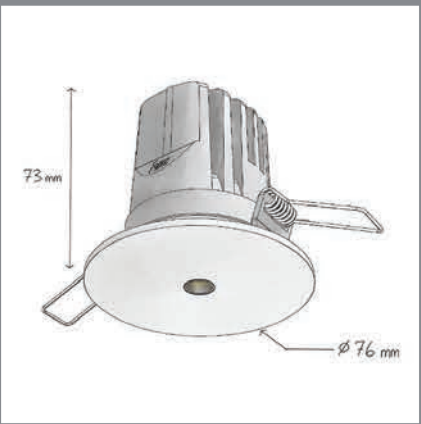

CODE	F181
Light source	LED
Power (W)	9
luminous flux (lm)	800 850
Color Rendering (Ra)	>80
Color Temperature (K)	3000 4000*
Body Color	White Black Chrome

IP 20

68mm

KG

0.43 kg

17 x 13 x 9 cm

CE

UGR <19

Supply Voltage:
220-240 Vac, 50Hz


Driver:
DALI | Dimmable version available upon request

Recommended Applications:
Residential | Office | Shop

*Customized body colors and other color temperatures (CCTs) are available upon request



Light distributions




Order code table

Body Color	3000K	Beam Angle	4000K	Body Color
White	F181W930M	Medium	F181W940M	White
Black	F181B930M	Medium	F181B940M	Black
Chrome	F181PI930M	Medium	F181PI940M	Chrome



Zhiwer

Ceiling Recessed

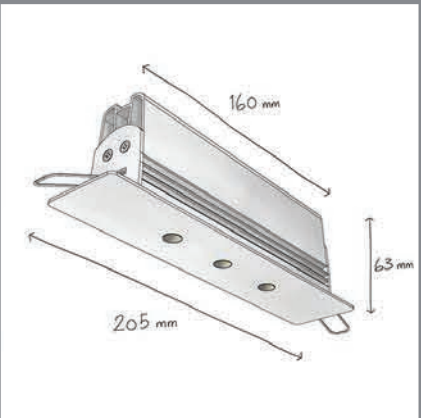

CODE	F182
Light source	LED
Power (W)	27
luminous flux (lm)	1800
Color Rendering (Ra)	>80
Color Temperature (K)	3000 4000*
Body Color	White Black

IP 20

KG

185 x 35 mm

0.6 kg

CE

UGR <19

27 x 10 x 5 cm

Supply Voltage:
220-240 Vac,50Hz

Driver:
DALI | Dimmable version available upon request

Recommended Applications:
Residential | Office | Shop

*Customized body colors and other color temperatures (CCTs) are available upon request

The specific design of the bottom frame, along with its strips, effectively reduces direct visibility of the light source and, naturally, minimizes glare.




▲ Reisser Showroom, Frankfurt, GermanyBelzner+Holmes Light Design ▲




Zhiwer

Light distributions




Spot(S)



Medium(M)

Accessories

Optional

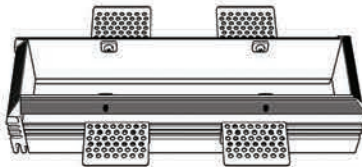

Trimless Installation Kit
Order code: 2182924126

Order code table

Body Color	3000K	Beam Angle	4000K	Body Color
White	F182W2730S	Spot	F182W2740S	White
	F182W2730M	Medium	F182W2740M	

Body Color	3000K	Beam Angle	4000K	Body Color
Black	F182B2730S	Spot	F182B2740S	Black
	F182B2730M	Medium	F182B2740M	

*Customized body colors and other color temperatures (CCTs) are available upon request

Eyren Micro

Ceiling Recessed




Eyren Micro

Ceiling Recessed



Small size, only 54 mm

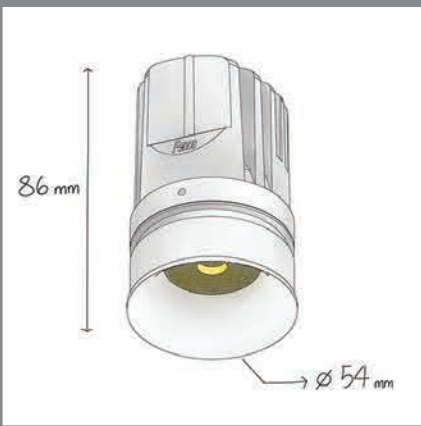

CODE	F190
Light source	LED
Power (W)	9
luminous flux (lm)	990
Color Rendering (Ra)	>80
Color Temperature (K)	3000 4000*
Body Color	White Black Silver Gold Chrome Copper*

*Customized body colors and other color temperatures (CCTs) are available upon request

IP 20

75 mm

KG

0.46 kg

17 x 13 x 9 cm

Supply Voltage:

220-240 Vac, 50Hz

Driver:

DALI | Dimmable version available upon request

Recommended Applications:

Residential | Office | Shop






Aban Residential / Architect: Gozar Andishe

Eyren Micro

Light distributions

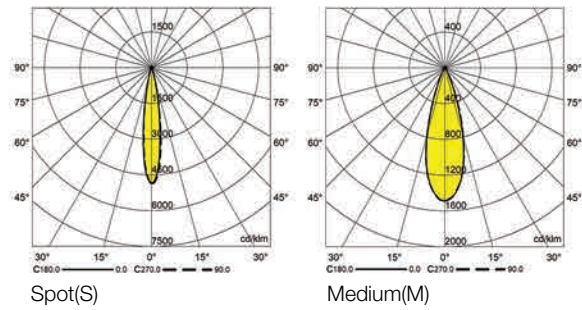

Accessories

Mandatory



Trimless Installation Kit
Order code: 2190924123

Order code table

Body Color	3000K	Beam Angle	4000K	Body Color
White	F190W930S	Spot	F190W940S	White
	F190W930M	Medium	F190W940M	
Body Color	3000K	Beam Angle	4000K	Body Color
Black	F190B930S	Spot	F190B940S	Black
	F190B930M	Medium	F190B940M	
Body Color	3000K	Beam Angle	4000K	Body Color
Gold	F190PJ930S	Spot	F190PJ940S	Gold
	F190PJ930M	Medium	F190PJ940M	
Body Color	3000K	Beam Angle	4000K	Body Color
Chrome	F190PI930S	Spot	F190PI940S	Chrome
	F190PI930M	Medium	F190PI940M	
Body Color	3000K	Beam Angle	4000K	Body Color
Copper	F190PC930S	Spot	F190PC940S	Copper
	F190PC930M	Medium	F190PC940M	


Eyren Mini

Ceiling Recessed



Eyren Mini

Ceiling Recessed

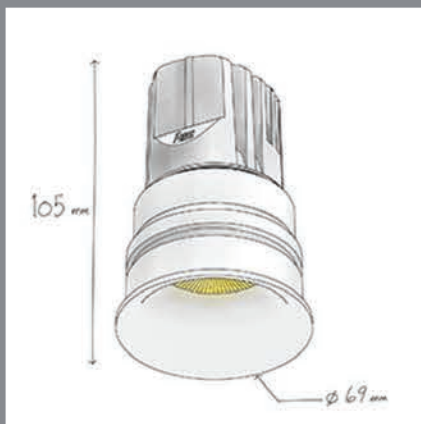

CODE	F191
Light source	LED
Power (W)	12
luminous flux (lm)	1300
Color Rendering (Ra)	>80
Color Temperature (K)	3000 4000*
Body Color	White Black Gold Chrome Copper*

*Customized body colors and other color temperatures (CCTs) are available upon request

IP 20

90 mm

KG

0.41 kg

20 x 16 x 12 cm

Supply Voltage:
220-240 Vac, 50Hz

Driver:

DALI | Dimmable version available
upon request

Recommended Applications:
Residential | Office | Shop




For GU10
Version



Eyren Mini

Light distributions

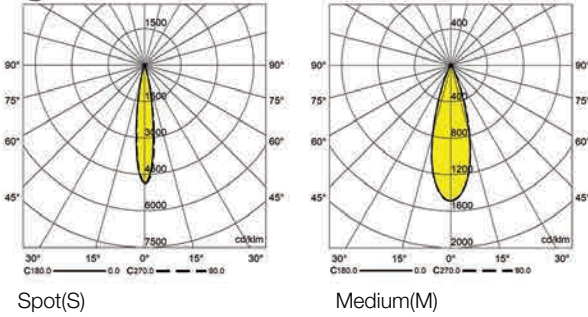

Accessories

Optional



Mandatory



Order code table

Body Color	3000K	Beam Angle	4000K	Body Color
White	F191W930S	Spot	F191W940S	White
	F191W930M	Medium	F191W940M	
Black	F191B930S	Spot	F191B940S	Black
	F191B930M	Medium	F191B940M	
Gold	F191PJ930S	Spot	F191PJ940S	Gold
	F191PJ930M	Medium	F191PJ940M	
Chrome	F191PI930S	Spot	F191PI940S	Chrome
	F191PI930M	Medium	F191PI940M	
Copper	F191PC930S	Spot	F191PC940S	Copper
	F191PC930M	Medium	F191PC940M	

Order code for GU10 Version**

Body Color	Body Code	Body Code	Body Color
White	F191WG	F191BG	Black

**Lamp is not Included

Eyren Midi

Ceiling Recessed



Eyren Midi

Ceiling Recessed



CODE	F192
Light source	LED
Power (W)	20
luminous flux (lm)	2200
Color Rendering (Ra)	>80
Color Temperature (K)	3000 4000*
Body Color	White Black Gold Chrome Copper*

*Customized body colors and other color temperatures (CCTs) are available upon request



112 mm



0.55 kg



20 x 16 x 12 cm

Supply Voltage:
220-240 Vac, 50Hz


Driver:
DALI | Dimmable version available
upon request

Recommended Applications:
Office | Shop



Eyren Midi

Light distributions

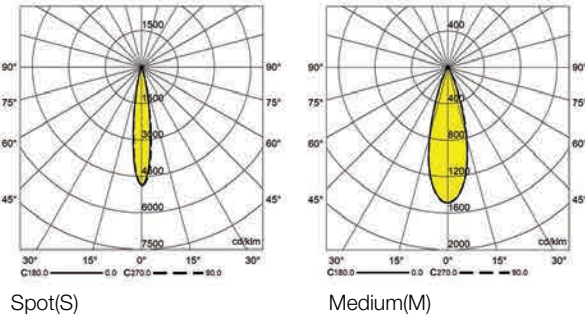

Accessories

Mandatory



Trimless Installation Kit
Order code: 2192924121

Order code table

Body Color	3000K	Beam Angle	4000K	Body Color
White	F192W930S	Spot	F192W940S	White
	F192W930M	Medium	F192W940M	
Body Color	3000K	Beam Angle	4000K	Body Color
Black	F192B930S	Spot	F192B940S	Black
	F191B930M	Medium	F192B940M	
Body Color	3000K	Beam Angle	4000K	Body Color
Gold	F192PJ930S	Spot	F192PJ940S	Gold
	F192PJ930M	Medium	F192PJ940M	
Body Color	3000K	Beam Angle	4000K	Body Color
Chrome	F192PI930S	Spot	F192PI940S	Chrome
	F192PI930M	Medium	F192PI940M	
Body Color	3000K	Beam Angle	4000K	Body Color
Copper	F192PC930S	Spot	F192PC940S	Copper
	F192PC930M	Medium	F192PC940M	



Eyren Maxi

Ceiling Recessed



Eyren Maxi

Ceiling Recessed

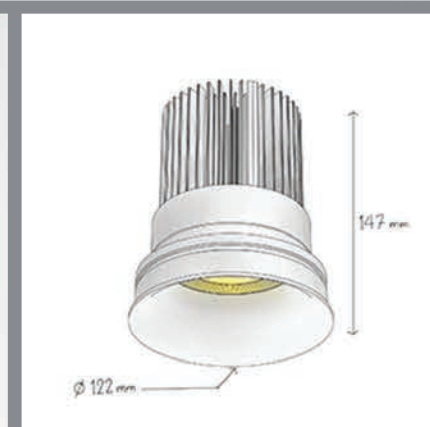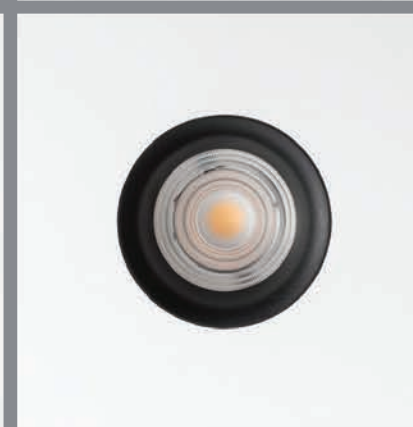

CODE	F193
Light source	LED
Power (W)	30
luminous flux (lm)	3300
Color Rendering (Ra)	>80
Color Temperature (K)	3000 4000*
Body Color	White Black Gold Chrome Copper*

*Customized body colors and other color temperatures (CCTs) are available upon request

IP 20

145 mm

1.1 kg

14 x 14 x 20 cm

Supply Voltage:
220-240 Vac,50Hz


Driver:
DALI | Dimmable version available upon request

Recommended Applications:
Office | Shop



Eyren Maxi

Light distributions

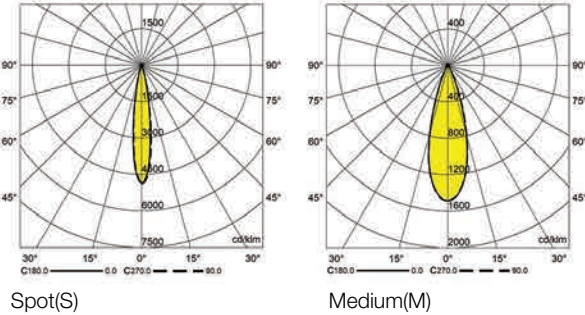

Accessories

Mandatory



Trimless Installation Kit
Order code: 2193924121

Order code table

Body Color	3000K 	Beam Angle	4000K 	Body Color
White	F193W930S	Spot	F193W940S	White
	F193W930M	Medium	F193W940M	
Body Color	3000K 	Beam Angle	4000K 	Body Color
Black	F193B930S	Spot	F193B940S	Black
	F193B930M	Medium	F193B940M	
Body Color	3000K 	Beam Angle	4000K 	Body Color
Gold	F193PJ930S	Spot	F193PJ940S	Gold
	F193PJ930M	Medium	F193PJ940M	
Body Color	3000K 	Beam Angle	4000K 	Body Color
Chrome	F193PI930S	Spot	F193PI940S	Chrome
	F193PI930M	Medium	F193PI940M	
Body Color	3000K 	Beam Angle	4000K 	Body Color
Copper	F193PC930S	Spot	F193PC940S	Copper
	F193PC930M	Medium	F193PC940M	


Sibron C Micro

Ceiling Recessed



Sibron C Micro

Ceiling Recessed

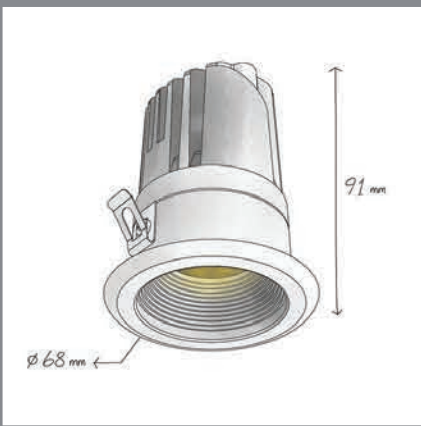

CODE	F134
Light source	LED
Power (W)	9
luminous flux (lm)	990
Color Rendering (Ra)	>80
Color Temperature (K)	3000 4000*
Body Color	White Black*

*Customized body colors and other color temperatures (CCTs) are available upon request



58 mm



0.28 kg



17 x 13 x 9 cm

Supply Voltage:
220-240 Vac, 50Hz

Driver:

DALI | Dimmable version available upon request


Recommended Applications:
Residential | Office | Shop



Dorin Ston Parsian / Architect: ZAV 2018

Sibron C Micro

Light distributions

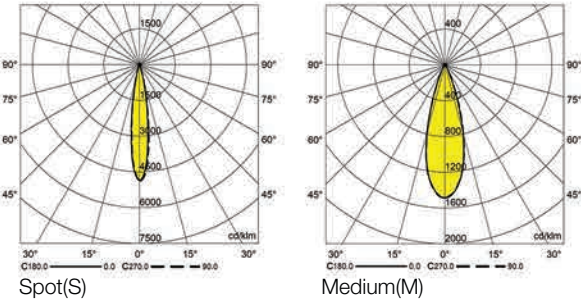

Order code table

Body Color	3000K	Beam Angle	4000K	Body Color
White	F134W930S	Spot	F134W940S	White
	F134W930M	Medium	F1345W940M	

Body Color	3000K	Beam Angle	4000K	Body Color
Black	F134B930S	Spot	F134B940S	Black
	F134B930M	Medium	F134B940M	

Sibron C Mini


Ceiling Recessed



The Specific design of the bottom frame with it's strips reduce the direct view to the light point and of course the glare

Sibron C Mini

Ceiling Recessed

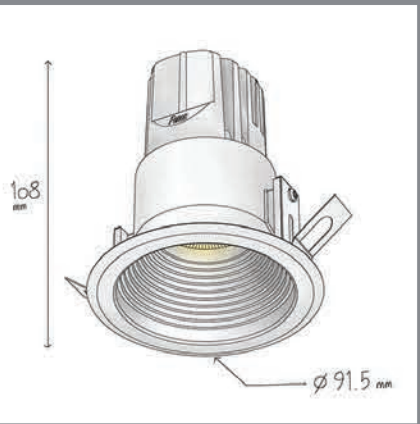

CODE	F135
Light source	LED
Power (W)	12
luminous flux (lm)	1300
Color Rendering (Ra)	>80
Color Temperature (K)	3000 4000*
Body Color	White Black*

*Customized body colors and other color temperatures (CCTs) are available upon request

IP 20

80 mm

CE

KG

0.38 (GU10: 0.44) kg

20 x 16 x 12 cm

Supply Voltage:

220-240 Vac,50Hz

Driver:

DALI | Dimmable version available upon request

Recommended Applications:

Residential | Office | Shop

For GU10 Version




▲ Charisma Office / Architect: Cando Archineering Group 2019 Sabad Gardan / Architect: Persian Garden Studio ▼




Sibron C Mini

Light distributions

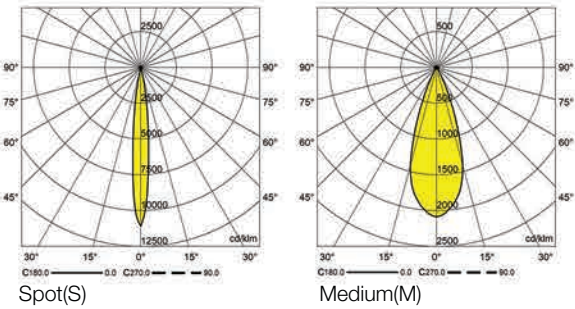

Accessories

Optional



LED GU10 Lamp
Order code: 10020101

Order code table

Body Color	3000K	Beam Angle	4000K	Body Color
White	F135W1230S	Spot	F135W1240S	White
	F135W1230M	Medium	F135W1240M	

Body Color	3000K	Beam Angle	4000K	Body Color
Black	F135B1230S	Spot	F135B1240S	Black
	F135B1230M	Medium	F135B1240M	

Order code for GU10 Version**

Body Color	Body Code	Body Code	Body Color
White	F135WG	F135BG	Black

**Lamp is not Included


Sibron C Midi

Ceiling Recessed



Sibron C Midi

Ceiling Recessed

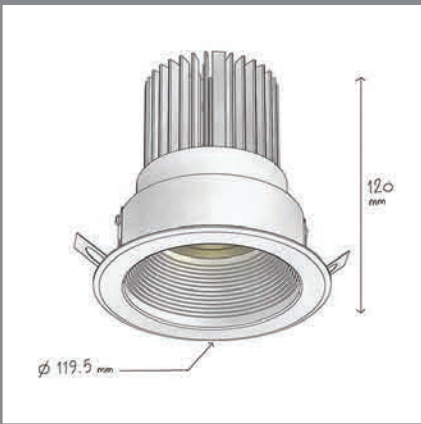

CODE	F137
Light source	LED
Power (W)	20
luminous flux (lm)	2200
Color Rendering (Ra)	>80
Color Temperature (K)	3000 4000*
Body Color	White Black*

IP 20

102 mm



KG

0.74 kg



20 x 16 x 12.3 cm

Supply Voltage:

220-240 Vac, 50Hz

Driver:

DALI | Dimmable version available upon request

Recommended Applications:

Office | Shop

*Customized body colors and other color temperatures (CCTs) are available upon request

Specific design of the bottom frame with it's strips reduce the direct view to the light point and of course glare




▲ Dorine Stone / Architect: ZAV 2018 ▼



Sibron C Midi

Light distributions

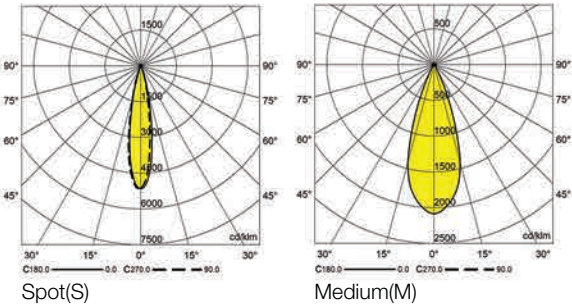

Order code table

Body Color	3000K	Beam Angle	4000K	Body Color
White	F137W2030S	Spot	F137W2040S	White
	F137W2030M	Medium	F137W2040M	

Body Color	3000K	Beam Angle	4000K	Body Color
Black	F137B2030S	Spot	F137B2040S	Black
	F137B2030M	Medium	F137B2040M	


Sibron C Maxi

Ceiling Recessed



Sibron C Maxi

Ceiling Recessed

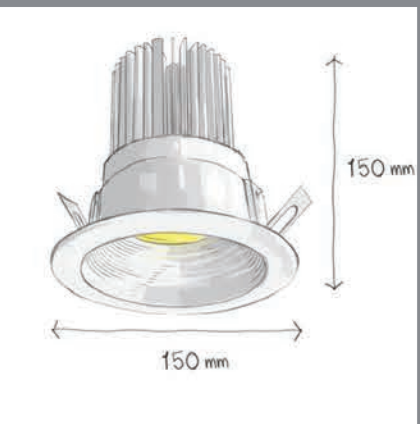

CODE	F138
Light source	LED
Power (W)	30
luminous flux (lm)	3300
Color Rendering (Ra)	>80
Color Temperature (K)	3000 4000*
Body Color	White Black*

*Customized body colors and other color temperatures (CCTs) are available upon request

IP 20 130 mm CE

KG 0.95 kg

28 x 25 x 17 cm

Supply Voltage:
220-240 Vac, 50Hz

Driver:
DALI | Dimmable version available
upon request

Recommended Applications:
Office | Shop


Specific design of the bottom frame with its strips reduce the direct view to the light point and of course glare



Dorine Stone / Architect: ZAV 2018

Sibron C Maxi

Light distributions

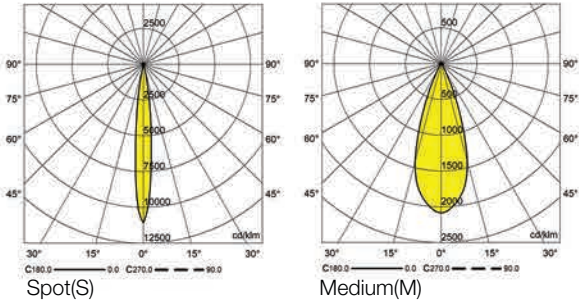

Order code table

Body Color	3000K	Beam Angle	4000K	Body Color
White	F138W3030S	Spot	F138W3040S	White
	F138W3030M	Medium	F138W3040M	

Body Color	3000K	Beam Angle	4000K	Body Color
Black	F138B3030S	Spot	F138B3040S	Black
	F138B3030M	Medium	F138B3040M	

Sibron CF-TR

Ceiling Recessed



Trimless lights are sought after by architects and interior designers in both modern and classical architectural structures. Sibron CF-TR, for instance, can be easily installed using a special kit on false ceilings with gypsum tiles like Knauf, as well as on traditional gypsum ceilings.

Sibron CF-TR

Ceiling Recessed



CODE	F136
Light source	LED
Power (W)	12
luminous flux (lm)	1300
Color Rendering (Ra)	>80
Color Temperature (K)	3000 4000*
Body Color	White Black*

*Customized body colors and other color temperatures (CCTs) are available upon request

IP 20

84 mm

0.35 (GU10: 0.2) kg

20 x 16 x 12.3 cm

Supply Voltage:

220-240 Vac, 50Hz

Driver:

DALI | Dimmable version available upon request

Recommended Applications:

Residential | Office | Shop

CE

For GU10 Version




▲ Kafi Abadi Residential / Architect: Bonsar Office 2019

Tavassoli Residential / Architect: Arsalan Golmakani / Paradim Office ▼



Sibron CF-TR

Light distributions

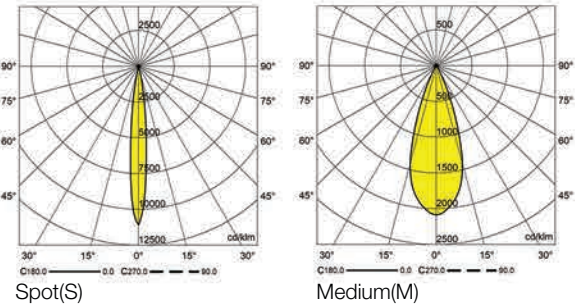

Accessories

Optional



LED GU10 Lamp
Order code: 10020101

Order code table

Body Color	3000K	Beam Angle	4000K	Body Color
White	F136W1230S	Spot	F136W1240S	White
	F136W1230M	Medium	F136W1240M	

Body Color	3000K	Beam Angle	4000K	Body Color
Black	F136B1230S	Spot	F136B1240S	Black
	F136B1230M	Medium	F136B1240M	

Order code for GU10 Version**

Body Color	Body Code	Body Code	Body Color
White	F136WG	F136BG	Black

**Lamp is not Included




Fitran C Mini

Ceiling Recessed



Fitran C Mini

Ceiling Recessed

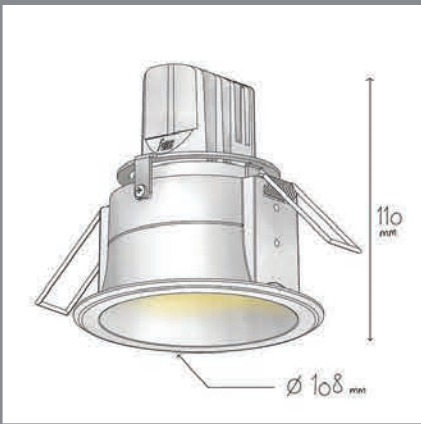

CODE	F128
Light source	LED
Power (W)	12
luminous flux (lm)	1300
Color Rendering (Ra)	>80
Color Temperature (K)	3000 4000*
Body Color	White Black*

*Customized body colors and other color temperatures (CCTs) are available upon request



90 mm

0.53 (GU10: 0.41) kg



20 x 16 x 12.3 cm

Supply Voltage:
220-240 Vac,50Hz

Driver:
DALI | Dimmable version available upon request


Recommended Applications:
Residential | Office | Shop



Ravi Gallery / Architect: Roshanak Tehrani Studio

Fitran C Mini

Light distributions

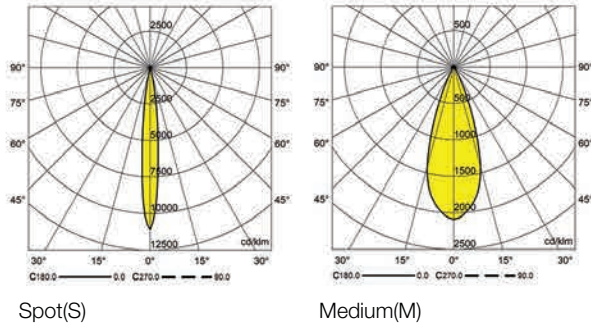

Accessories

Optional



LED GU10 Lamp
Order code: 10020101

Order code table

Body Color	3000K	Beam Angle	4000K	Body Color
White	F128W1230S	Spot	F128W1240S	White
	F128W1230M	Medium	F128W1240M	

Body Color	3000K	Beam Angle	4000K	Body Color
Black	F128B1230S	Spot	F128B1240S	Black
	F128B1230M	Medium	F128B1240M	

Order code for GU10 Version**

Body Color	Body Code	Body Code	Body Color
White	F128WG	F128BG	Black

**Lamp is not Included


Tiran C Mini

Ceiling Recessed



Tiran C Mini

Ceiling Recessed

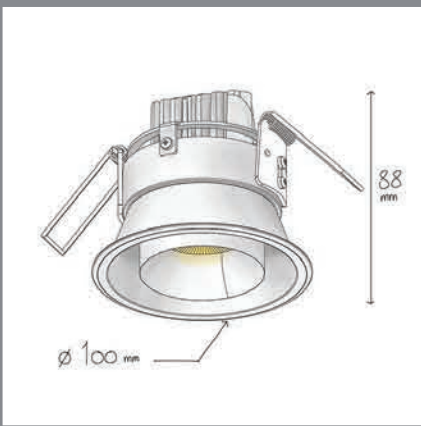

CODE	F127
Light source	LED
Power (W)	12
luminous flux (lm)	1300
Color Rendering (Ra)	>80
Color Temperature (K)	3000 4000*
Body Color	White Black*

*Customized body colors and other color temperatures (CCTs) are available upon request

IP 20	90 mm	CE	
KG	0.58 (GU10: 0.46) kg		
	20 x 16 x 12.3 cm		


Supply Voltage:
220-240 Vac, 50Hz
Driver:
DALI | Dimmable version available upon request
Recommended Applications:
Residential | Office | Shop



LAVAN / Architect: Fallah 2014

Tiran C Mini

Light distributions

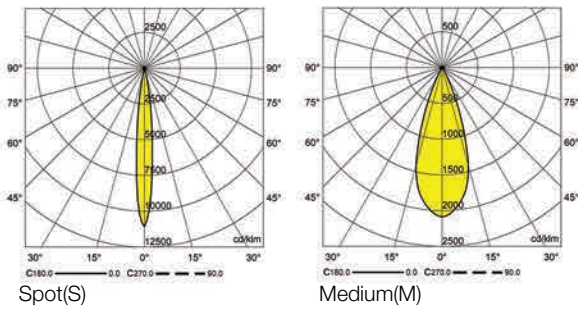

Accessories

Optional



LED GU10 Lamp
Order code: 10020101

Order code table

Body Color	3000K	Beam Angle	4000K	Body Color
White	F127W1230S	Spot	F127W1240S	White
	F127W1230M	Medium	F127W1240M	
Body Color	3000K	Beam Angle	4000K	Body Color
Black	F127B1230S	Spot	F127B1240S	Black
	F127B1230M	Medium	F127B1240M	

Order code for GU10 Version**

Body Color	Body Code	Body Code	Body Color
White	F127WG	F127BG	Black

**Lamp is not Included




Accent lighting is one of the key elements in architectural lighting design. Spot lighting on objects, attracts people's attention to that object, and creates the feeling of drama in the space.

We as human being like shadows. A completely uniform lit environment resembles a cloudy day for us. The extreme narrow beam of Nian XS family, generated by a sophisticated high tech optic and a powerful compact light source is a good solution.

In retail environment, increase level of contrast between light and dark spaces, gives a feeling of more luxury and special feeling to the customer.

Nian

Ceiling Recessed

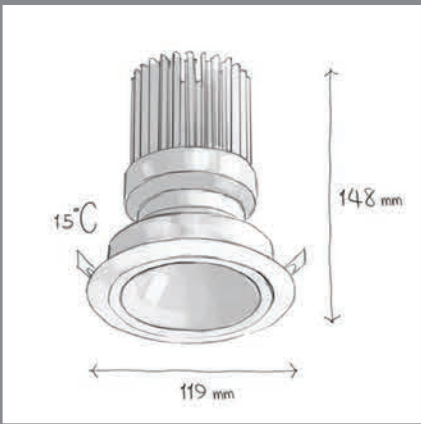

CODE	F130
Light source	LED
Power (W)	9* 12
luminous flux (lm)	600 1320
Color Rendering (Ra)	>80
Color Temperature (K)	3000 4000**
Body Color	White&Black**

*XS Version

**Customized body colors and other color temperatures (CCTs) are available upon request

IP 20 102 mm CE

KG 0.44 kg

20 x 16 x 12 cm

Supply Voltage:
220-240 Vac,50Hz

Driver:
DALI | Dimmable version available upon request

Recommended Applications:
Residential | Office | Shop | Restaurant




▼ Alborz Ceramic Showroom / Architect: Archiform 2018

Mozafarian Jewellery / Architect: Ehsan Mohajer 2017 ▲



Nian

Light distributions

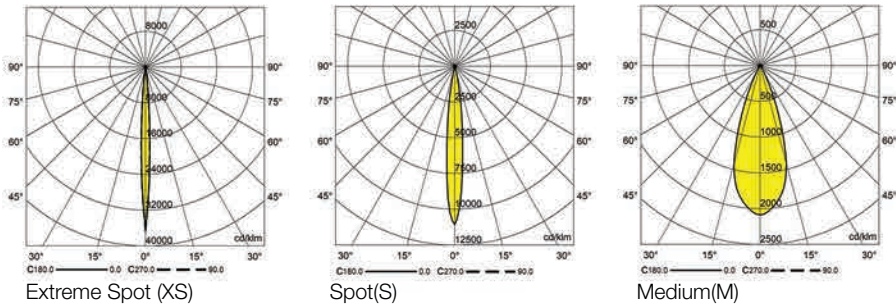

Order code table

Body Color	3000K	Beam Angle	4000K	Body Color
White & Black	F130WB930XS	Extreme-Spot	F130WB940XS	White & Black
	F130WB930S	Spot	F130WB940S	
	F130WB1230M	Medium	F130WB1240M	

Roni WW

Ceiling Recessed




Roni WW

Ceiling Recessed



Trimless Version

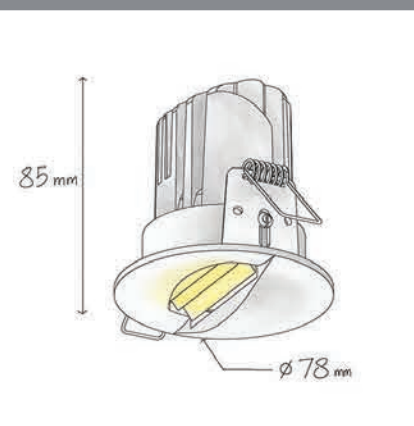

CODE	F185
Light source	LED
Power (W)	12
luminous flux (lm)	1300
Color Rendering (Ra)	>80
Color Temperature (K)	3000 4000*
Body Color	White*

*Customized body colors and other color temperatures (CCTs) are available upon request

IP 20	70 mm 95 mm (Trimless Version)	
KG	0.59 kg	
	20 x 16 x 12 cm	

Supply Voltage:
220-240 Vac, 50Hz
Driver:
DALI | Dimmable version available upon request
Recommended Applications:
Residential | Office | Shop | Gallery | Museum


Roni WW provides a uniform illumination on the wall surface, a perfect solution for highlighting architectural features of a building as well as lighting of galleries and museums. Its special design, makes the glare as low as possible.



8 West-Canada / Designed & built by Kipp Design + Build

Roni WW

Light distributions



Accessories

Optional



Trimless Installation Kit
Order code: 2185924121
For Trimless Installation

Order code table


Body Color	3000K	Beam Angle	4000K	Body Color
White	F185W1230WW	Wallwasher	F185W1240WW	White



Vertical illumination is increasingly recognized as crucial by architects and lighting designers. Architects value it as it enhances the ambiance and overall appeal of a space, making it more inviting. Shop owners benefit from vertical illumination as it increases visibility and makes the shop appear brighter from the outside. In office settings, it contributes to improved visual comfort, creating a more conducive working environment.

Valman

Ceiling Recessed

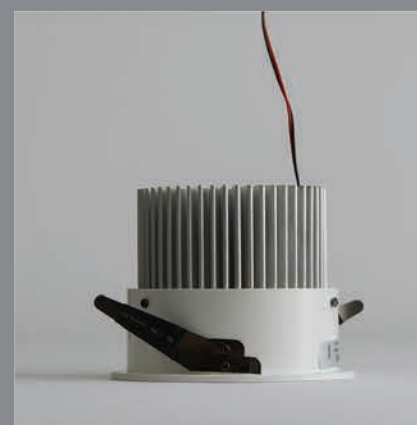

CODE	F160
Light source	LED
Power (W)	30
luminous flux (lm)	3400
Color Rendering (Ra)	>80
Color Temperature (K)	3000 4000*
Body Color	White*

*Customized body colors and other color temperatures (CCTs) are available upon request

IP 20 125 mm

1.10 kg

28 x 25 x 17 cm

Supply Voltage:
220-240 Vac, 50Hz

Driver:
DALI | Dimmable version available
upon request

Recommended Applications:
Office | Shop




▲ Car Showroom
Architect: Persian Garden 2017 ▶



◀ Baguette Restaurant
Architect: Parsa Ardani
& Ramin Beyraghdar 2017

Valman

Light distributions



Order code table

Body Color	3000K	Beam Angle	4000K	Body Color
White	F160W3030WW	Wallwasher	F160W3040WW	White



Sibron Q Mini

Ceiling Recessed



Sibron Q Mini

Ceiling Recessed

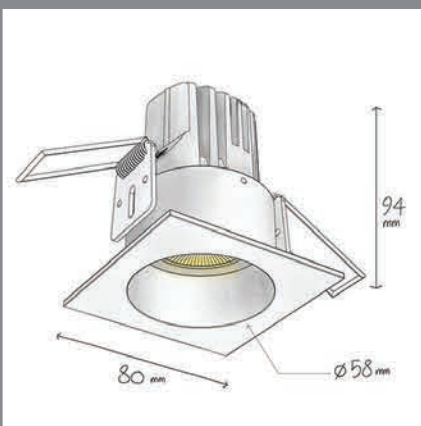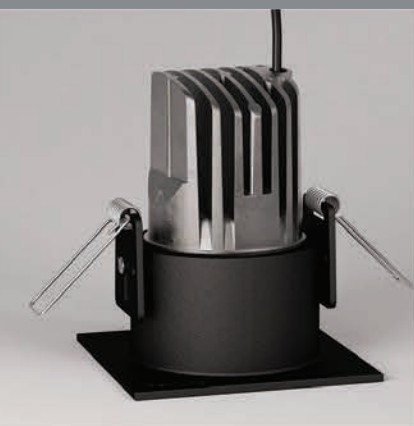

CODE	F140
Light source	LED
Power (W)	12
luminous flux (lm)	1300
Color Rendering (Ra)	>80
Color Temperature (K)	3000 4000*
Body Color	White Black*

*Customized body colors and other color temperatures (CCTs) are available upon request

IP 20

70 mm

CE

KG

0.37 (GU10: 0.23) kg

20 x 16 x 12 cm

For GU10 Version


Supply Voltage:
220-240 Vac, 50Hz
Driver:
DALI | Dimmable version available upon request
Recommended Applications:
Residential | Office | Shop



Cafe Bazar Office / Architect: Mohammad Khavarian

Sibron Q Mini

Light distributions

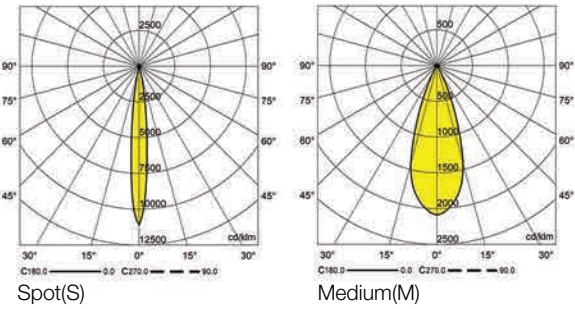

Accessories

Optional



LED GU10 Lamp
Order code: 10020101

Order code table

Body Color	3000K	Beam Angle	4000K	Body Color
White	F140W1230S	Spot	F140W1240S	White
	F140W1230M	Medium	F140W1240M	

Body Color	3000K	Beam Angle	4000K	Body Color
Black	F140B1230S	Spot	F140B1240S	Black
	F140B1230M	Medium	F140B1240M	

Order code for GU10 Version**

Body Color	Body Code	Body Code	Body Color
White	F140WG	F140BG	Black

**Lamp is not Included


Sibron Q Midi

Ceiling Recessed



Sibron Q Midi

Ceiling Recessed

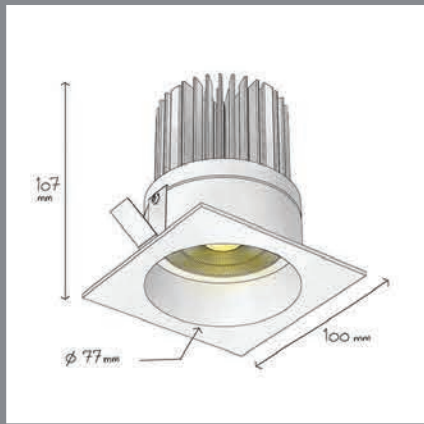

CODE	F141
Light source	LED
Power (W)	20
luminous flux (lm)	2200
Color Rendering (Ra)	>80
Color Temperature (K)	3000 4000*
Body Color	White Black*

*Customized body colors and other color temperatures (CCTs) are available upon request



90 mm



0.52 kg



20 x 16 x 12 cm

Supply Voltage:

220-240 Vac, 50Hz

Driver:

DALI | Dimmable version available upon request

Recommended Applications:

Residential | Office | Shop




▲ Aban Residential / Architect: Gozar Andisheh 2019 ▼



Sibron Q Midi

Light distributions

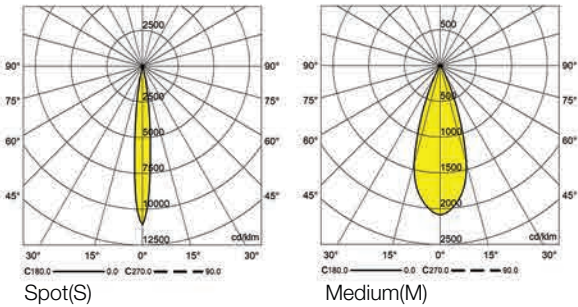

Order code table

Body Color	3000K	Beam Angle	4000K	Body Color
White	F141W2030S	Spot	F141W2040S	White
	F141W2030M	Medium	F141W2040M	

Body Color	3000K	Beam Angle	4000K	Body Color
Black	F141B2030S	Spot	F141B2040S	Black
	F141B2030M	Medium	F141B2040M	


Sibron Q Maxi

Ceiling Recessed



Sibron Q Maxi

Ceiling Recessed

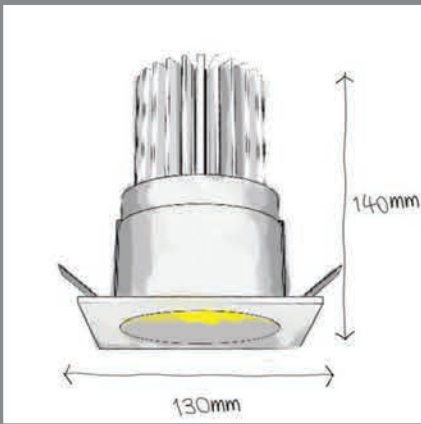

CODE	F142
Light source	LED
Power (W)	30
luminous flux (lm)	3300
Color Rendering (Ra)	>80
Color Temperature (K)	3000 4000*
Body Color	White Black*

*Customized body colors and other color temperatures (CCTs) are available upon request



115 mm



0.96 kg



28 x 25 x 17 cm

Supply Voltage:
220-240 Vac, 50Hz

Driver:
DALI | Dimmable version available
upon request


Recommended Applications:
Hotel | Office | Shop



Loutka Restaurant / Architect: Arsh Studio

Sibron Q Maxi

Light distributions

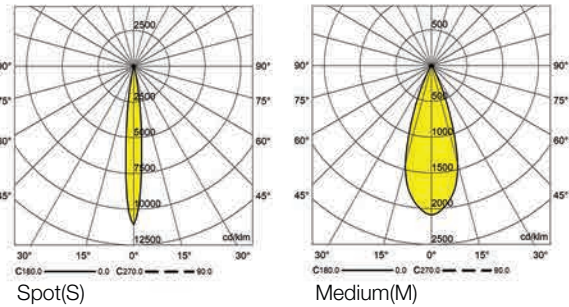

Order code table

Body Color	3000K	Beam Angle	4000K	Body Color
White	F142W3030S	Spot	F142W3040S	White
	F142W3030M	Medium	F142W3040M	

Body Color	3000K	Beam Angle	4000K	Body Color
Black	F142B3030S	Spot	F142B3040S	Black
	F142B3030M	Medium	F142B3040M	


Eyden Mini

Ceiling Recessed



Eyden Mini

Ceiling Recessed

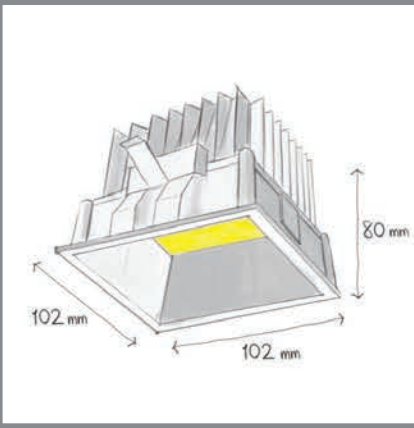

CODE	F150
Light source	LED
Power (W)	10
luminous flux (lm)	1100
Color Rendering (Ra)	>80
Color Temperature (K)	3000 4000*
Body Color	White Black*

*Customized body colors and other color temperatures (CCTs) are available upon request

IP 20 95 x 95 mm

0.41 kg

20 x 16 x 12 cm

Supply Voltage:
220-240 Vac, 50Hz

Driver:
DALI | Dimmable version available
upon request

Recommended Applications:
Residential | Office | Shop


Pure minimal design and low glare



ASP Residential / Architect: Gozar Andisheh 2018

Eyden Mini

Light distributions



Order code table

Body Color	3000K	Beam Angle	4000K	Body Color
White	F150W1030W	Wide	F150W1040W	White
Black	F150B1030W	Wide	F150B1040W	Black

Eyden Mini TR

Ceiling Recessed





Specific design of the bottom frame with it's strips reduce the direct view to the light point and of course glare

Eyden Mini TR



Ceiling Recessed

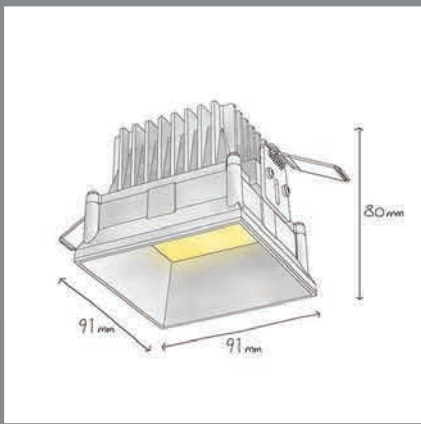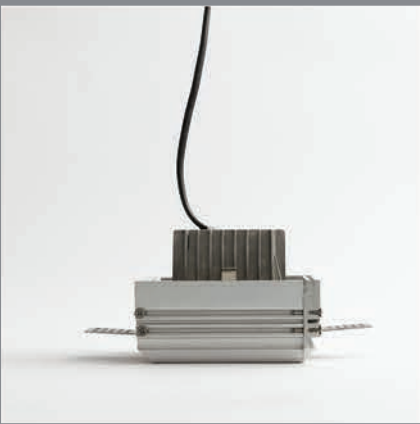

CODE	F153
Light source	LED
Power (W)	10
luminous flux (lm)	1100
Color Rendering (Ra)	>80
Color Temperature (K)	3000 4000*
Body Color	White Black

*Customized body colors and other color temperatures (CCTs) are available upon request


IP 20	113 x 113 mm	CE	□
KG 0.76 kg			
20 x 16 x 12 cm			

Supply Voltage:
220-240 Vac, 50Hz
Driver:
DALI | Dimmable version available upon request
Recommended Applications:
Residential | Office | Shop




Eyden Mini TR

Light Distributions



Light Distributions



Trimless Installation Kit
Order code: 2099924117

Order code table

Body Color	3000K	Beam Angle	4000K	Body Color
White	F153W1030W	Spot	F153W1040W	White
Body Color	3000K	Beam Angle	4000K	Body Color
Black	F153B1030W	Spot	F153B1040W	Black


Fitran Q

Ceiling Recessed



Fitran Q

Ceiling Recessed

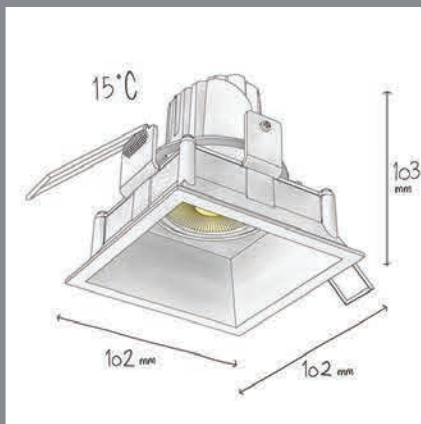

CODE	F119
Light source	LED
Power (W)	12
luminous flux (lm)	1300
Color Rendering (Ra)	>80
Color Temperature (K)	3000 4000*
Body Color	White Black*

*Customized body colors and other color temperatures (CCTs) are available upon request

IP 20	95 x 95 mm	CE	For GU10 Version
KG	0.53 (GU10: 0.42) kg		
Box	20 x 16 x 12 cm		

Supply Voltage:
220-240 Vac, 50Hz
Driver:
DALI | Dimmable version available upon request
Recommended Applications:
Residential | Office | Shop




▲ JTI Office / Architect: Persian Garden 2019 ▼



Fitran Q

Light distributions

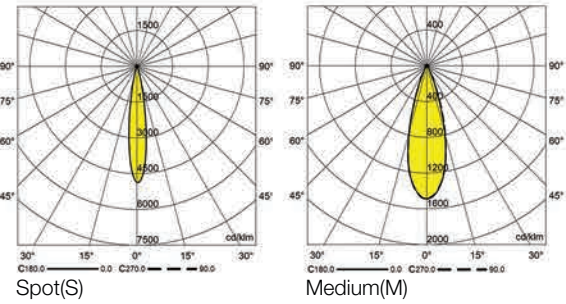

Accessories

Optional



LED GU10 Lamp
Order code: 10020101

Order code table

Body Color	3000K	Beam Angle	4000K	Body Color
White	F119W1230S	Spot	F119W1240S	White
	F119W1230M	Medium	F119W1240M	
Body Color	3000K	Beam Angle	4000K	Body Color
Black	F119B1230S	Spot	F119B1240S	Black
	F119B1230M	Medium	F119B1240M	

Order code for GU10 Version**

Body Color	Body Code	Body Code	Body Color
White	F119WG	F119BG	Black

**Lamp is not Included

Fitran Q TR


Ceiling Recessed



Fitran Q TR Fitran QG TR*

*for Gu10 lamps

Ceiling Recessed

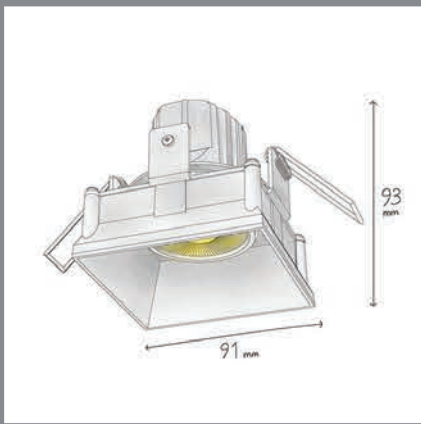

CODE	F129
Light source	LED
Power (W)	12
luminous flux (lm)	2600
Color Rendering (Ra)	>80
Color Temperature (K)	3000 4000*
Body Color	White Black

IP 20 113 x 113 mm CE
0.91 (GU10: 0.71) kg
20 x 16 x 12 cm

Supply Voltage:
220-240 Vac, 50Hz
Driver:
DALI | Dimmable version available upon request
Recommended Applications:
Residential | Office | Shop

*Customized body colors and other color temperatures (CCTs) are available upon request


Specific design of the bottom frame with its strips reduce the direct view to the light point and of course glare




JTI Office / Architect:Persian Garden

Fitran Q TR

Light distributions




Spot(S)



Medium(M)

Accessories

Mandatory

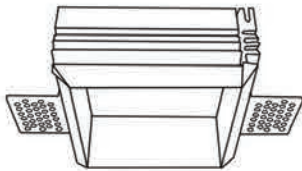

Trimless Installation Kit
Order code: 2099924117

Optional



LED GU10 Lamp
Order code: 10020101

Order code table

Body Color	3000K	Beam Angle	4000K	Body Color
White	F129W1230S	Spot	F129W1240S	White
	F129W1230M	Medium	F129W1240M	

Body Color	3000K	Beam Angle	4000K	Body Color
Black	F129B1230S	Spot	F136B1240S	Black
	F129B1230M	Medium	F129B1240M	

Order code for GU10 Version**

Body Color	Body Code	Body Code	Body Color
White	F129WG	F129BG	Black

**Lamp is not Included

Fitran Q TR Twin


Ceiling Recessed



Fitran Q TR Twin Fitran QG TR Twin

*for GU10 lamps

Ceiling Recessed

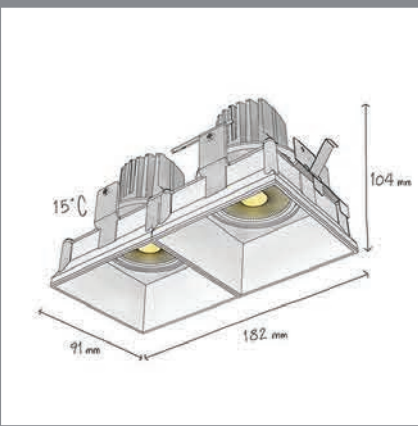

CODE	F117
Light source	LED
Power (W)	2x12
luminous flux (lm)	2600
Color Rendering (Ra)	>80
Color Temperature (K)	3000 4000*
Body Color	White Black

*Customized body colors and other color temperatures (CCTs) are available upon request

IP 20	115x205 mm	CE	For GU10 Version
1.82 kg	28 x 25 x 17 cm		


Supply Voltage:
220-240 Vac, 50Hz
Driver:
DALI | Dimmable version available upon request
Recommended Applications:
Residential | Office | Shop

Specific design of the bottom frame with it's strips reduce the direct view to the light point and of course glare




Fitran Q TR Twin

Light distributions




Spot(S)



Medium(M)


Accessories

Mandatory

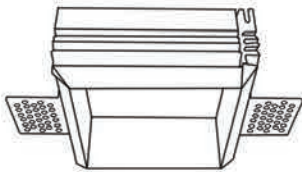

Trimless Installation Kit
Order code: 2099924118

Optional



LED GU10 Lamp
Order code: 10020101

Order code table

Body Color	3000K	Beam Angle	4000K	Body Color
White	F117W1230S	Spot	F117W1240S	White
	F117W1230M	Medium	F117W1240M	

Body Color	3000K	Beam Angle	4000K	Body Color
Black	F117B1230S	Spot	F117B1240S	Black
	F117B1230M	Medium	F117B1240M	

Order code for GU10 Version**

Body Color	Body Code	Body Code	Body Color
White	F117WG	F116BG	Black



**Lamp is not Included

Tiran S

Ceiling Recessed



Tiran S

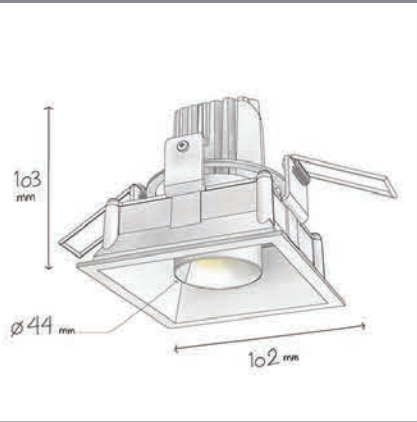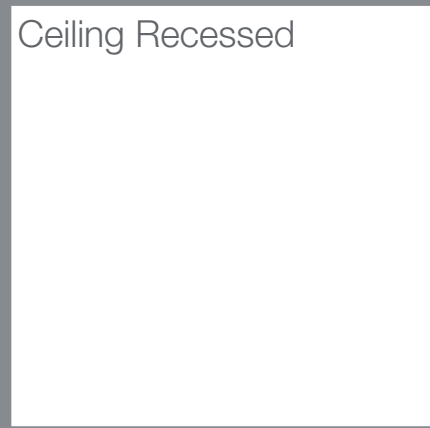

CODE	F120
Light source	LED
Power (W)	9
luminous flux (lm)	990
Color Rendering (Ra)	>80
Color Temperature (K)	3000 4000*
Body Color	White Black*

*Customized body colors and other color temperatures (CCTs) are available upon request

IP 20

 95 X 95 mm





 0.51 (GU10: 0.4) kg

 20 x 16 x 12 kg

Supply Voltage:
220-240 Vac,50Hz

Driver:
DALI | Dimmable version available
upon request

Recommended Applications:
Residential | Office | Shop


The contrast between square shape of the frame and round shape of light source is an interesting feature for many designers.



JTI office / Architect: Persian Garden Studio

Tiran S

Light distributions

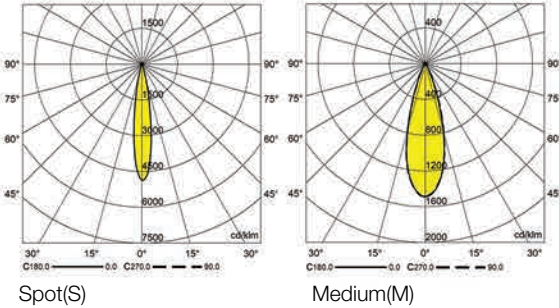

Accessories

Optional



LED GU10 Lamp
Order code: 10020101

Order code table

Body Color	3000K	Beam Angle	4000K	Body Color
White	F120W930S	Spot	F120W940S	White
	F120W930M	Medium	F120W940M	

Body Color	3000K	Beam Angle	4000K	Body Color
Black	F120B930S	Spot	F120B940S	Black
	F120B930M	Medium	F120B940M	

Order code for GU10 Version**

Body Color	Body Code	Body Code	Body Color
White	F122WG	F122BG	Black

**Lamp is not Included


Tiran S TR

Ceiling Recessed



Tiran S TR

Ceiling Recessed

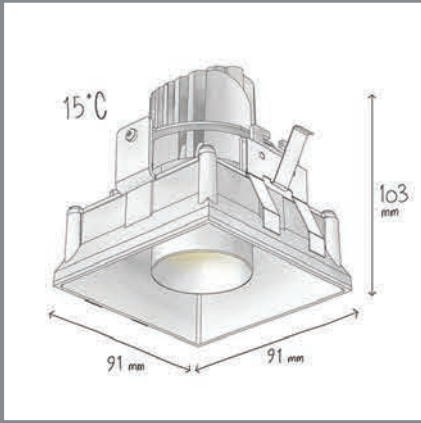

CODE	F121
Light source	LED
Power (W)	9
luminous flux (lm)	990
Color Rendering (Ra)	>80
Color Temperature (K)	3000 4000*
Body Color	White Black

*Customized body colors and other color temperatures (CCTs) are available upon request

IP 20	113 x 113 mm	CE	□
KG	0.89 kg		
Box	17 x 13 x 9 cm		


Supply Voltage:
220-240 Vac, 50Hz
Driver:
DALI | Dimmable version available upon request
Recommended Applications:
Residential | Office | Shop



Aban Residential / Architect Gozar Andishe

Tiran S Trimless

Light distributions

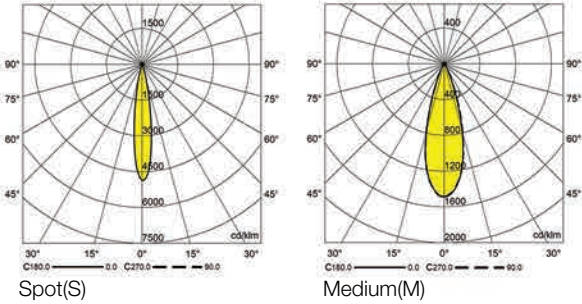


Accessories



Trimless Installation Kit
Order code: 2099924117

Optional



LED GU10 Lamp
Order code: 10020101

Order code table

Body Color	3000K	Beam Angle	4000K	Body Color
White	F121W930S	Spot	F121W940S	White
	F121W930M	Medium	F121W940M	
Body Color	3000K	Beam Angle	4000K	Body Color
Black	F121B930S	Spot	F121B940S	Black
	F121B930M	Medium	F121B940M	

Order code for GU10 Version**

Body Color	Body Code	Body Code	Body Color
White	F126WG	F126BG	Black

**Lamp is not Included

Tiran SG TR Twin




Ceiling Recessed



Specific design of the bottom frame with it's strips reduce the direct view to the light point and of course glare

Tiran SG TR Twin

Ceiling Recessed

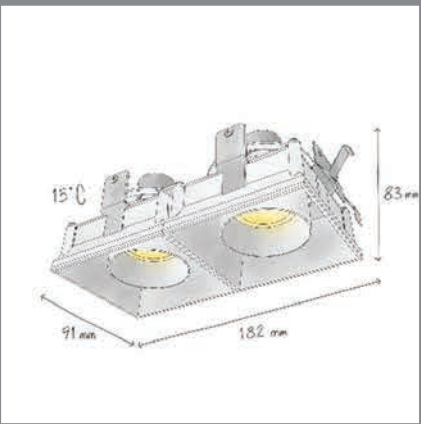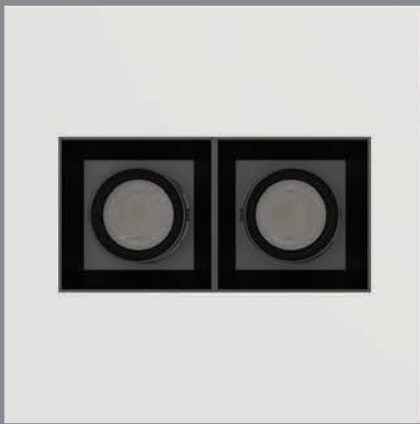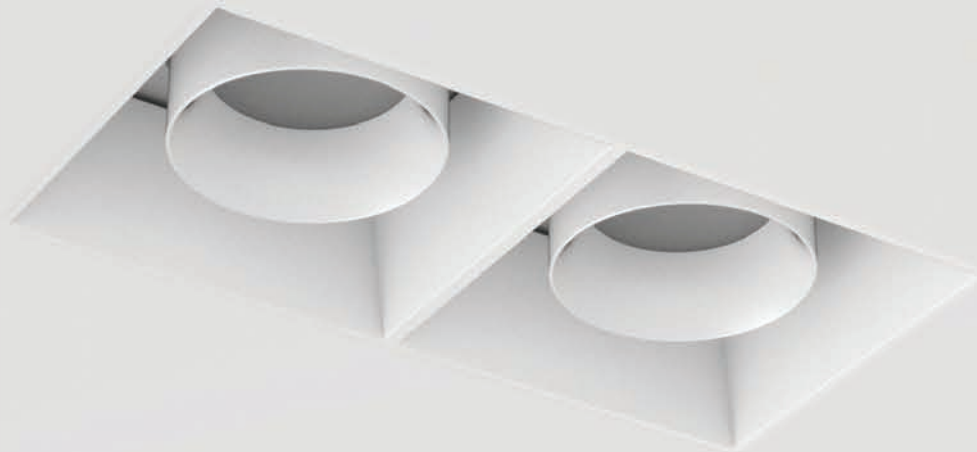

CODE	F116
Light source	LED
Power (W)	2 x 6
luminous flux (lm)	990
Color Rendering (Ra)	>80
Color Temperature (K)	3000 4000*
Body Color	White Black

*Customized body colors and other color temperatures (CCTs) are available upon request

IP 20	115 x 205 mm	CE	
KG 0.75 kg			
28 x 25 x 17 cm			


Supply Voltage:
220-240 Vac,50Hz
Driver:
DALI | Dimmable version available upon request
Recommended Applications:
Residential | Office | Shop



Tiran SG TR Twin

Accessories

Mandatory



Trimless Installation Kit
Order code: 2099924118

Mandatory



LED GU10 Lamp
Order code: 10020101

Order code table

Body Color	Order Code		Body Color
White	F116WG	F116BG	Black

Filde Micro


Ceiling Recessed



Filde Micro is a minimal adjustable downlight with different light distributions from spot to wide.

Filde Micro

Ceiling Recessed

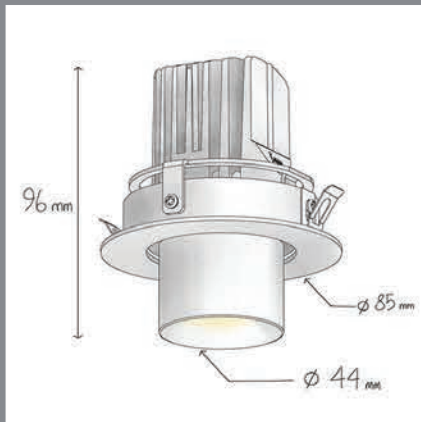

CODE	F123
Light source	LED
Power (W)	9
luminous flux (lm)	990
Color Rendering (Ra)	>80
Color Temperature (K)	3000 4000*
Body Color	White Black*

*Customized body colors and other color temperatures (CCTs) are available upon request

IP 20

75 mm

CE

KG

0.32 kg

Box

17 x 13 x 9 cm

Supply Voltage:

220-240 Vac,50Hz

Driver:

DALI | Dimmable version available upon request

Recommended Applications:


Residential | Office | Shop



Kafi Abadi Residential / Architect: Bonsar Office 2019

Filde Micro

Light distributions

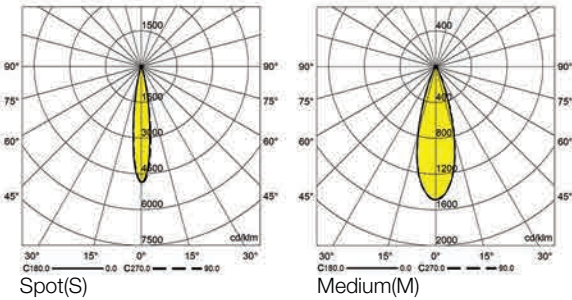

Order code table

Body Color	3000K	Beam Angle	4000K	Body Color
White	F123W930S	Spot	F123W940S	White
	F123W930M	Medium	F123W940M	

Body Color	3000K	Beam Angle	4000K	Body Color
Black	F123B930S	Spot	F123B940S	Black
	F123B930M	Medium	F123B940M	


Filde Mini

Ceiling Recessed



Filde Mini

Ceiling Recessed

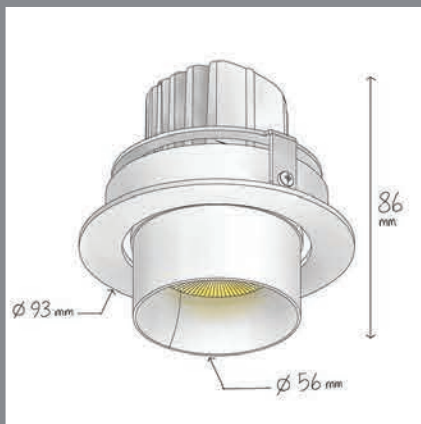

CODE	F124
Light source	LED
Power (W)	12
luminous flux (lm)	1300
Color Rendering (Ra)	>80
Color Temperature (K)	3000 4000*
Body Color	White Black*

*Customized body colors and other color temperatures (CCTs) are available upon request

IP 20

84 mm

KG

0.46 (GU10: 0.29) kg

Box

20 x 16 x 12 cm

Supply Voltage:

220-240 Vac, 50Hz

Driver:

DALI | Dimmable version available upon request

Recommended Applications:

Residential | Office | Shop

CE


For GU10 Version



Tavassoli Residential / Architect: Paradaim 2020


Filde Mini

Light distributions

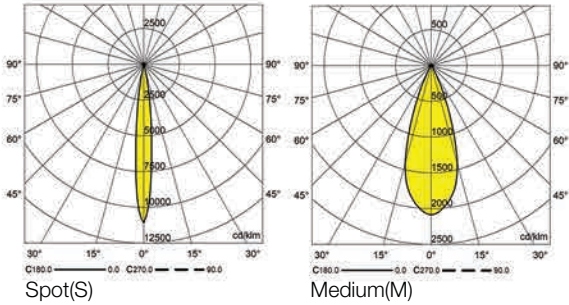

Accessories

Optional



LED GU10 Lamp
Order code: 10020101

Order code table

Body Color	3000K	Beam Angle	4000K	Body Color
White	F124W1230S	Spot	F124W1240S	White
	F124W1230M	Medium	F124W1240M	

Body Color	3000K	Beam Angle	4000K	Body Color
Black	F124B1230S	Spot	F124B1240S	Black
	F124B1230M	Medium	F124B1240M	

Order code for GU10 Version**

Body Color	Body Code	Body Code	Body Color
White	F124WG	F124BG	Black

**Lamp is not Included




Merbo Micro RA

Ceiling Recessed



Merbo Micro RA

Ceiling Recessed

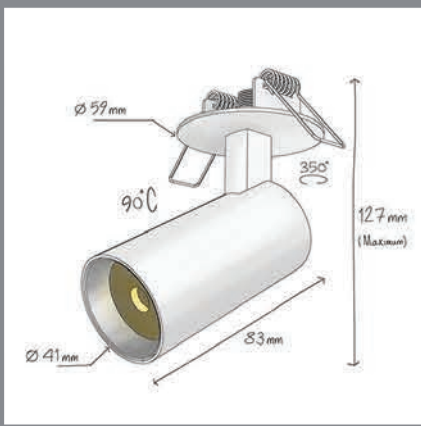

CODE	F342
Light source	LED
Power (W)	9
luminous flux (lm)	990
Color Rendering (Ra)	>80
Color Temperature (K)	3000 4000*
Body Color	White Black

*Customized body colors and other color temperatures (CCTs) are available upon request



50 mm



0.25 kg



17 x 13 x 9 cm



Supply Voltage:

220-240 Vac, 50Hz

Driver:

DALI | Dimmable version available upon request


Recommended Applications:

Residential | Office | Shop | Museum | Gallery



Merbo Micro RA

Light distributions

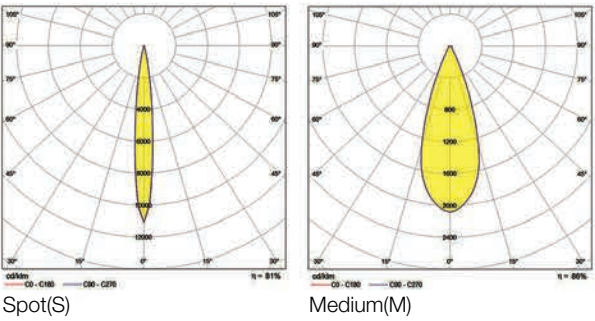

Order code table

Body Color	3000K	Length (cm)	4000K	Body Color
White	F342W930S	Spot	F342W940S	White
	F342W930M	Medium	F342W940M	
Body Color	3000K	Length (cm)	4000K	Body Color
Black	F342B930S	Spot	F342B940S	Black
	F342B930M	Medium	F342B940M	

Merbo Micro RA Twin


Ceiling Recessed



Specific design of the bottom frame with it's strips reduce the direct view to the light point and of course glare

Merbo Micro RA Twin

Ceiling Recessed

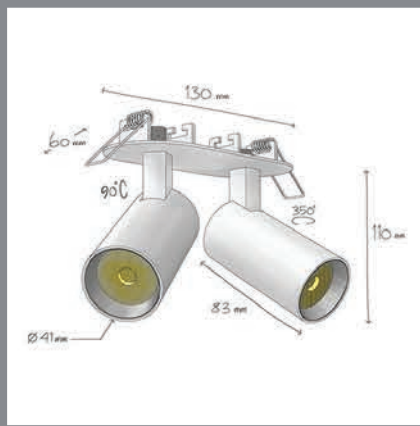

CODE	F194
Light source	LED
Power (W)	2*9
luminous flux (lm)	2*990
Color Rendering (Ra)	>80
Color Temperature (K)	3000 4000*
Body Color	White Black

*Customized body colors and other color temperatures (CCTs) are available upon request

IP 20 112 x 32 mm
KG 0.5 kg
Box 17 x 13 x 9 cm

Supply Voltage:
220-240 Vac,50Hz

Driver:
DALI | Dimmable version available upon request


Recommended Applications:
Residential | Office | Shop | Museum | Gallery





Merbo Micro RA Twin

Light distributions

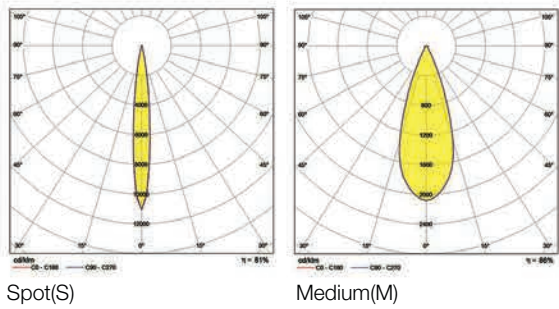

Order code table

Body Color	3000K	Length (cm)	4000K	Body Color
White	F194W1830S	Spot	F194W1840S	White
	F194W1830M	Medium	F194W1840M	
Body Color	3000K	Length (cm)	4000K	Body Color
Black	F194B1830S	Spot	F194B1840S	Black
	F194B1830M	Medium	F194B1840M	

Merbo Mini RA


Ceiling Recessed



The specific design of the lower frame with its strip reduces the direct view of the light spot and glare

Merbo Mini RA

Ceiling Recessed

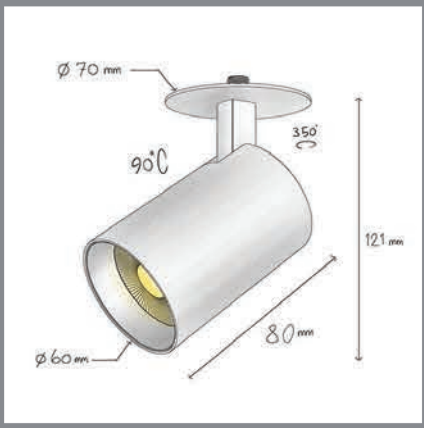

CODE	F345
Light source	LED
Power (W)	12
luminous flux (lm)	1300 1320
Color Rendering (Ra)	>80
Color Temperature (K)	3000 4000*
Body Color	White Black

*Customized body colors and other color temperatures (CCTs) are available upon request



60 mm



0.44 kg



17 x 13 x 9 cm

Supply Voltage:

220-240 Vac, 50Hz

Driver:

DALI | Dimmable version available upon request


Recommended Applications:

Residential | Office | Shop



Merbo Mini RA

Light distributions

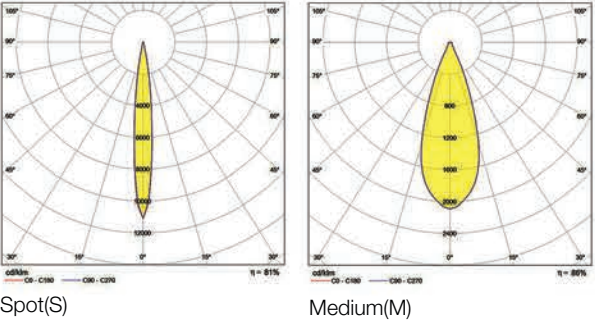

Order code table

Body Color	3000K	Length (cm)	4000K	Body Color
White	F345W1230S	Spot	F345W1240S	White
	F345W1230M	Medium	F345W1240M	
Body Color	3000K	Length (cm)	4000K	Body Color
Black	F345B1230S	Spot	F345B1240S	Black
	F345B1230M	Medium	F345B1240M	

Aro RA


Ceiling Recessed



The specific design of the lower frame with its strip reduces the direct view of the light spot and glare

Aro RA

Ceiling Recessed

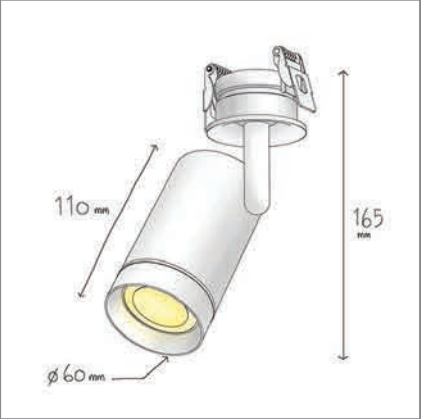

CODE	F334
Light source	LED
Power (W)	6
luminous flux (lm)	550
Color Rendering (Ra)	>80
Color Temperature (K)	3000 4000
Body Color	White Black *

*Customized body colors and other color temperatures (CCTs) are available upon request

IP 20

KG

Box

54 mm

0.52 kg

17 x 13 x 9 cm

CE

For GU10 Version

Supply Voltage:
220-240 Vac,50Hz

Driver:
DALI | Dimmable version available upon request


Recommended Applications:
Residential | Office | Shop



Aro RA

Accessories

Mandatory



LED GU10 Lamp
Order code: 10020101

Order code table

Body Color	Order Code
White	F334WG
Black	F334BG



Indoor Lighting

Surface Mounted

Felka Micro S


Surface Mounted



Specific design of the bottom frame with it's strips reduce the direct view to the light point and of course glare

Felka Micro S

Surface Mounted

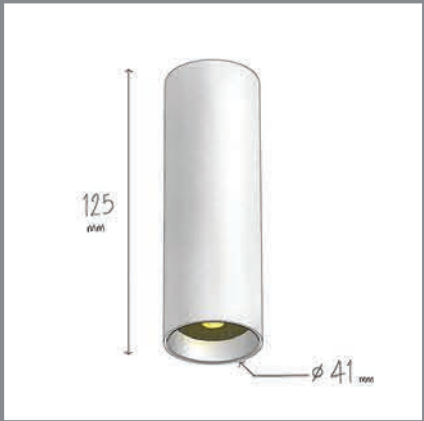

CODE	F313
Light source	LED
Power (W)	9
luminous flux (lm)	990
Color Rendering (Ra)	>80
Color Temperature (K)	3000 4000*
Body Color	White Black

*Customized body colors and other color temperatures (CCTs) are available upon request



0.3 kg



17 x 13 x 9 cm

Supply Voltage:

220-240 Vac,50Hz

Driver:

DALI | Dimmable version available upon request

Recommended Applications:


Residential | Office | Shop | Museum | Gallery






Felka Micro S

Light distributions



Spot(S)



Medium(M)

Order code table

Body Color	3000K	Beam Angle	4000K	Body Color
White	F313W930S	Spot	F313W940S	White
	F313W930M	Medium	F313W940M	
Black	F313B930S	Spot	F313B940S	Black
	F314B930M	Medium	F313B940M	


Felka Mini S

Surface Mounted



Felka Mini S

Surface Mounted

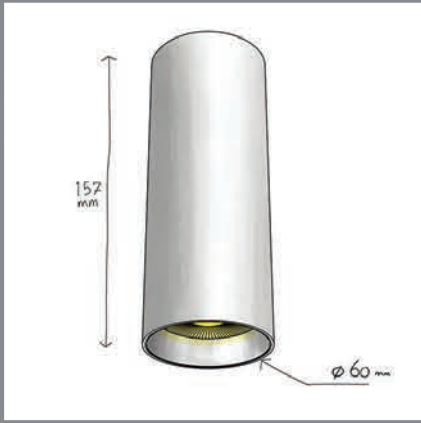

CODE	F317
Light source	LED
Power (W)	12
luminous flux (lm)	1300 1320
Color Rendering (Ra)	>80
Color Temperature (K)	3000 4000*
Body Color	White Black

IP
20

KG

0.52 kg



20 x 13 x 9 cm

Supply Voltage:

220-240 Vac, 50Hz

Driver:

DALI | Dimmable version available upon request

Recommended Applications:

Residential | Office | Shop



Specific design of the bottom frame with it's strips reduce the direct view to the light point and of course glare


*Customized body colors and other color temperatures (CCTs) are available upon request



JTI office / Architect: Persian Garden 2019

Felka Mini S

Light distributions

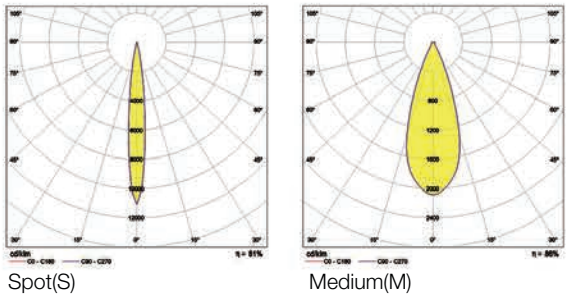

Order code table

Body Color	3000K	Beam Angle	4000K	Body Color
White	F317W1230S	Spot	F317W1240S	White
	F317W1230M	Medium	F317W1240M	

Body Color	3000K	Beam Angle	4000K	Body Color
Black	F317B1230S	Spot	F317B1240S	Black
	F317B1230M	Medium	F317B1240M	

Felka Midi S


Surface Mounted



Specific design of the bottom frame with it's strips reduce the direct view to the light point and of course glare

Felka Midi S

Surface Mounted

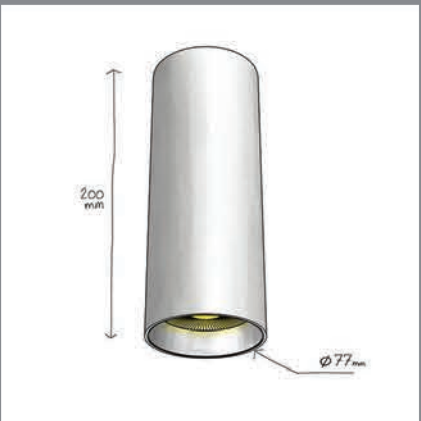

CODE	F327
Light source	LED
Power (W)	20
luminous flux (lm)	2200
Color Rendering (Ra)	>80
Color Temperature (K)	3000 4000*
Body Color	White Black

*Customized body colors and other color temperatures (CCTs) are available upon request

IP
20

KG

1.0 kg

20 x 16 x 12 cm

Supply Voltage:

220-240 Vac, 50Hz

Driver:

DALI | Dimmable version available upon request

Recommended Applications:

Residential | Office | Shop

CE

KG

20 x 16 x 12 cm

Supply Voltage:

220-240 Vac, 50Hz

Driver:

DALI | Dimmable version available upon request

Recommended Applications:

Residential | Office | Shop




▲▼ Hana Bouitque Hotel / Architect: Persian Garden Studio



Felka Midi S

Light distributions

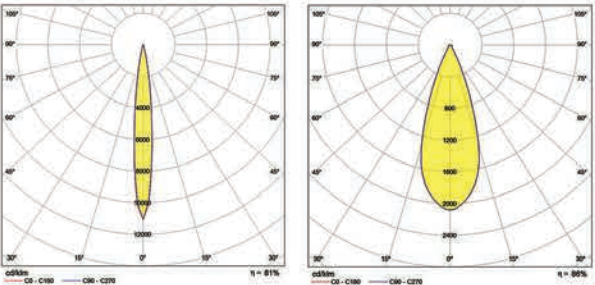

Spot(S)

Medium(M)

Order code table

Body Color	3000K	Beam Angle	4000K	Body Color
White	F327W2030S	Spot	F327W2040S	White
	F327W2030M	Medium	F327W2040M	

Body Color	3000K	Beam Angle	4000K	Body Color
Black	F327B2030S	Spot	F327B2040S	Black
	F327B2030M	Medium	F327B2040M	

Felka Maxi S

Surface Mounted



Specific design of the bottom frame with it's strips reduce the direct view to the light point and of course glare

Felka Maxi S

Surface Mounted



CODE	F321
Light source	LED
Power (W)	30
luminous flux (lm)	3300
Color Rendering (Ra)	>80
Color Temperature (K)	3000 4000*
Body Color	White Black

*Customized body colors and other color temperatures (CCTs) are available upon request

IP 20

KG

1.3 kg



28 x 25 x 17 cm

CE

RoHS

Supply Voltage:

220-240 Vac, 50Hz

Driver:

DALI | Dimmable version available upon request


Recommended Applications:

Residential | Office | Shop



Felka Maxi S

Light distributions

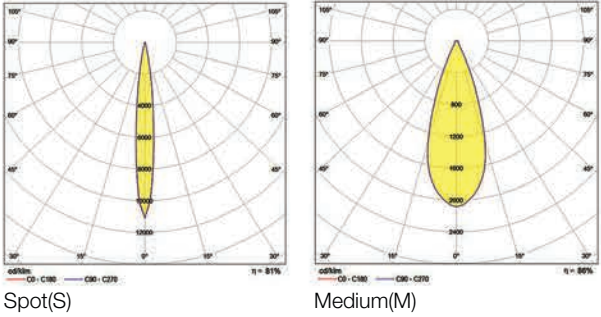

Order code table

Body Color	3000K	Beam Angle	4000K	Body Color
White	F321W3030S	Spot	F321W3040S	White
	F321W3030M	Medium	F321W3040M	

Body Color	3000K	Beam Angle	4000K	Body Color
Black	F321B3030S	Spot	F321B3040S	Black
	F321B3030M	Medium	F321B3040M	

Aro S

Pendant Mounted



Specific design of the bottom frame with it's strips reduce the direct view to the light point and of course glare

Aro S

Pendant Mounted



CODE	F331
Light source	LED
Power (W)	6
luminous flux (lm)	550
Color Rendering (Ra)	>80
Color Temperature (K)	3000 4000
Body Color	White Black *

*Customized body colors are available upon request



0.33 kg



17 x 13 x 9 cm



Supply Voltage:

220-240 Vac, 50Hz

Driver:

GU10 version available
upon request

Recommended Applications:

Residential | Office | Shop



Aro S

Accessories

Mandatory



LED GU10 Lamp
Order code: 10020101

Order code table

Body Color	3000K	Beam Angle	4000K	Body Color
White	F331WG	Spot	F331BG	White

Aro SA


Surface Mounted



Specific design of the bottom frame with it's strips reduce the direct view to the light point and of course glare

Aro SA

Surface Mounted

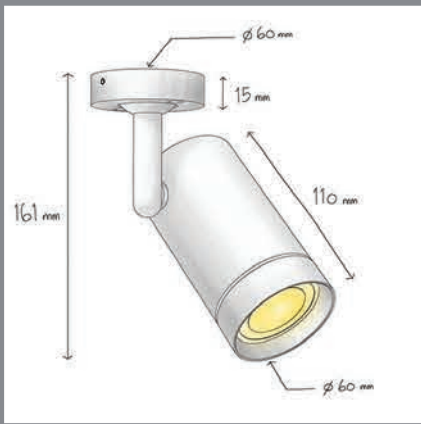

CODE	F333
Light source	LED
Power (W)	6
luminous flux (lm)	550
Color Rendering (Ra)	>80
Color Temperature (K)	3000 4000
Body Color	White Black *

*Customized body colors and other color temperatures (CCTs) are available upon request



0.52 kg



17 x 13 x 9 cm

Supply Voltage:
220-240 Vac,50Hz

Driver:
DALI | Dimmable version available
upon request

Recommended Applications:
Residential | Office | Shop



For GL10
Version



Ozgol Residential / Architect:Harirchi Architect

Aro SA

Accessories

Mandatory



LED GU10 Lamp
Order code: 10020101

Order code table

Body Color	Order Code		Body Color
White	F333WG	F333BG	Black

**Lamp is not Included


Merbo Micro CW-DR

Surface Mounted



Merbo Micro CW-DR

Surface Mounted

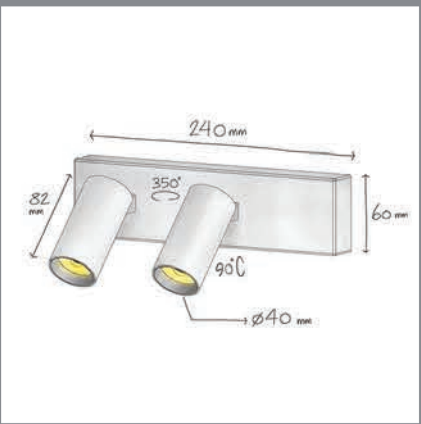

CODE	F352
Light source	LED
Power (W)	2 x 9
luminous flux (lm)	2 x 990
Color Rendering (Ra)	>80
Color Temperature (K)	3000 4000*
Body Color	White Black



1.05 kg



28 x 25 x 17 cm

Supply Voltage:

220-240 Vac, 50Hz

Driver:

DALI | Dimmable version available upon request

Recommended Applications:

Residential | Office | Shop | Museum | Gallery




Specific design of the bottom frame with its strips reduce the direct view to the light point and of course glare

*Customized body colors and other color temperatures (CCTs) are available upon request




Merbo Micro CW-DR

Light distributions



Spot(S)



Medium(M)

Order code table

Body Color	3000K	Length (cm)	4000K	Body Color
White	F352W1830S-DR	Spot	F352W1840S-DR	White
	F352W1830M-DR	Medium	F352W1840M-DR	
Body Color	3000K	Length (cm)	4000K	Body Color
Black	F352B1830S-DR	Spot	F352B1840S-DR	Black
	F352B1830M-DR	Medium	F352B1840M-DR	


Merbo Micro CW-DS

Surface Mounted



Merbo Micro CW-DS

Surface Mounted

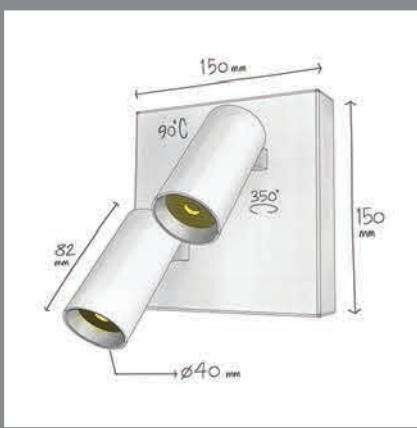

CODE	F352
Light source	LED
Power (W)	2 x 9
luminous flux (lm)	2 x 990
Color Rendering (Ra)	>80
Color Temperature (K)	3000 4000*
Body Color	White Black

*Customized body colors and other color temperatures (CCTs) are available upon request

IP
20

KG

1.05 kg

KG

28 x 25 x 17 cm

Supply Voltage:

220-240 Vac, 50Hz

Driver:

DALI | Dimmable version available upon request

Recommended Applications:


Residential | Office | Shop | Museum | Gallery





Merbo Micro CW-DS

Light distributions

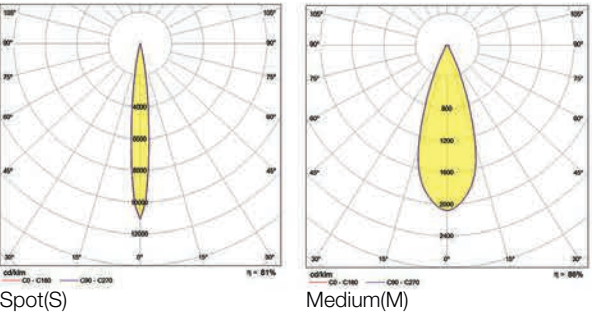

Order code table

Body Color	3000K	Length (cm)	4000K	Body Color
White	F352W1830S-DS	Spot	F352W1840S-DS	White
	F352W1830M-DS	Medium	F352W1840M-DS	
Body Color	3000K	Length (cm)	4000K	Body Color
Black	F352B1830S-DS	Spot	F352B1840S-DS	Black
	F352B1830M-DS	Medium	F352B1840M-DS	

Aro CW


Surface Mounted



The specific design of the lower frame with its strip reduces the direct view of the light spot and glare

Aro CW

Surface Mounted

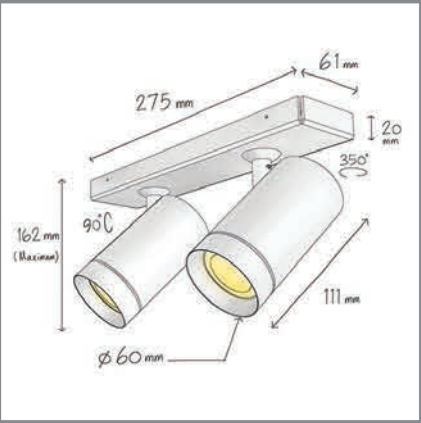

CODE	F337
Light source	LED
Power (W)	2 x 6
luminous flux (lm)	2 x 550
Color Rendering (Ra)	>80
Color Temperature (K)	3000 4000
Body Color	White Black *

*Customized body colors and other color temperatures (CCTs) are available upon request

IP
20

KG

1.1 kg

28 x 25 x 17 cm

Supply Voltage:

220-240 Vac,50Hz

Driver:

DALI | Dimmable version available upon request

Recommended Applications:

Residential | Office | Shop

CE

For GU10 Version



Aro CW

Accessories

Mandatory



LED GU10 Lamp
Order code: 10020101

Order code table

Body Color	Order Code		Body Color
White	F337WG	F337BG	Black

**Lamp is not Included

Valman S


Surface Mounted



Vertical illumination is becoming more and more important for architects and lighting designers. It is important for architects because it reveals the feel of the space, and helps the place to become even more inviting. It is important for shop owners because it makes the shop become more visible and appear brighter from outside. In an office it helps to provide better visual comfort.

Valman S

Surface Mounted

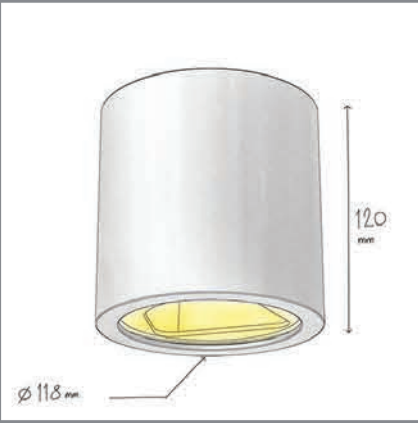

CODE	F161
Light source	LED
Power (W)	20
luminous flux (lm)	2200
Color Rendering (Ra)	>80
Color Temperature (K)	3000 4000*
Body Color	White Black

*Customized body colors and other color temperatures (CCTs) are available upon request

IP
20

KG

1.0 kg

20 x 16 x 12 cm

Supply Voltage:
220-240 Vac, 50Hz

Driver:
DALI | Dimmable version available
upon request

Recommended Applications:
Office | Shop | Museum | Gallery


CE

RoHS



Valman S

Light distributions



WallWasher (WW)

Order code table

Body Color	3000K	Beam Angle	4000K	Body Color
White	F161W2030WW	WallWasher	F161W2040WW	Black

Indoor Lighting

Pendant




Felka Micro P

Pendant Mounted



Felka Micro P

Pendant Mounted

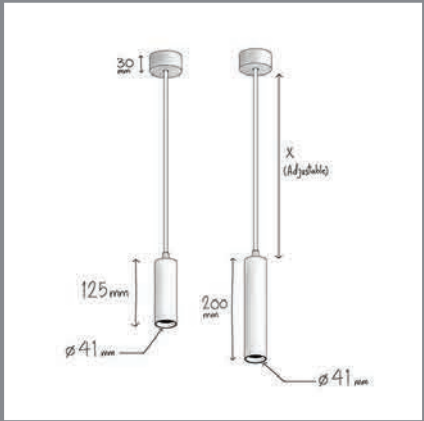

CODE	F314
Light source	LED
Power (W)	9
luminous flux (lm)	990
Color Rendering (Ra)	>80
Color Temperature (K)	3000 4000*
Body Color	White Black Brushed Gold/Copper/Alu*

*Customized body colors and other color temperatures (CCTs) are available upon request

IP
20

KG

0.30 kg



17*13*9 (cm) 12.5 cm Version
20*16*12 (cm) 2.0 cm Version

Supply Voltage:

220-240 Vac,50Hz

Driver:

DALI | Dimmable version available
upon request

Recommended Applications:

Residential | Office | Shop | Museum | Gallery


CE

RoHS




Felka Micro P

Light distributions



Spot(S)



Medium(M)

Order code table

Body Color	3000K	Beam Angle	4000K	Body Color
White	F314W930S	Spot	F314W940S	White
	F314W930M	Medium	F314W940M	
Black	F314B930S	Spot	F314B940S	Black
	F314B930M	Medium	F314B940M	
Brushed Copper	F314BC930S	Spot	F314BC940S	Brushed Copper
	F314BC930M	Medium	F314BC940M	
Brushed Gold	F314BJ930S	Spot	F314BJ940S	Brushed Gold
	F314BJ930M	Medium	F314BJ940M	
Brushed Alu	F314BA930S	Spot	F314BA940S	Brushed Alu
	F314BA930M	Medium	F314BA940M	

Felka Mini P

Pendant Mounted



Specific design of the bottom frame with it's strips reduce the direct view to the light point and of course glare

Felka Mini P

Pendant Mounted



CODE	F319
Light source	LED
Power (W)	12
luminous flux (lm)	1300 1320
Color Rendering (Ra)	>80
Color Temperature (K)	3000 4000*
Body Color	White Black

*Customized body colors and other color temperatures (CCTs) are available upon request



0.6 kg



17 x 13 x 9 cm



Supply Voltage:

220-240 Vac,50Hz

Driver:

DALI | Dimmable version available upon request

Recommended Applications:

Residential | Office | Shop




Cafe Bazar Head Office / Architect: Mohammad Khavari



Felka Mini P

Light distributions

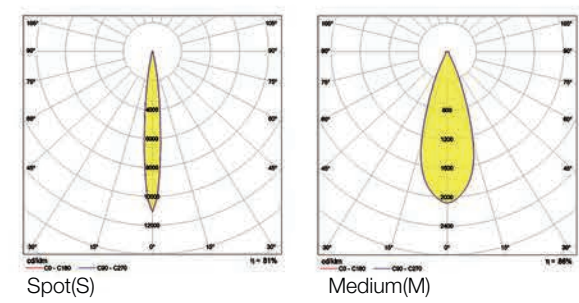

Order code table

Body Color	3000K	Beam Angle	4000K	Body Color
White	F319W1230S	Spot	F319W1240S	White
	F319W1230M	Medium	F319W1240M	
Body Color	3000K	Beam Angle	4000K	Body Color
Black	F319B1230S	Spot	F319B1240S	Black
	F319B1230M	Medium	F319B1240M	

Felka Midi P


Pendant Mounted



Specific design of the bottom frame with it's strips reduce the direct view to the light point and of course glare

Felka Midi P

Pendant Mounted

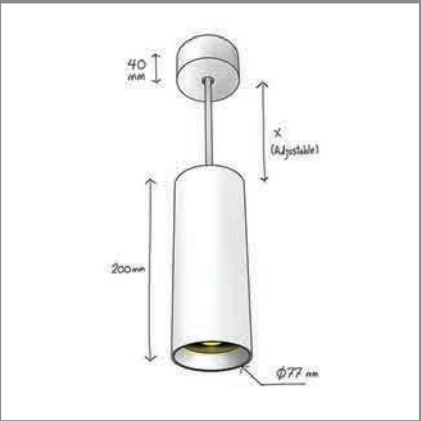

CODE	F326
Light source	LED
Power (W)	20
luminous flux (lm)	2200
Color Rendering (Ra)	>80
Color Temperature (K)	3000 4000*
Body Color	White Black

*Customized body colors and other color temperatures (CCTs) are available upon request



1.0 kg



20 x 16 x 12 cm

Supply Voltage:

220-240 Vac,50Hz

Driver:

DALI | Dimmable version available upon request

Recommended Applications:


Residential | Office | Shop






Felka Midi P

Light distributions



Spot(S)



Medium(M)

Order code table

Body Color	3000K	Beam Angle	4000K	Body Color
White	F326W2030S	Spot	F136W1240S	White
	F326W2030M	Medium	F326W2040M	

Body Color	3000K	Beam Angle	4000K	Body Color
Black	F326B2030S	Spot	F326B2040S	Black
	F326B2030M	Medium	F326B2040M	

Felka Maxi P

Pendant Mounted



Felka Maxi P

Pendant Mounted



CODE	F320
Light source	LED
Power (W)	30
luminous flux (lm)	3300
Color Rendering (Ra)	>80
Color Temperature (K)	3000 4000*
Body Color	White Black

*Customized body colors and other color temperatures (CCTs) are available upon request

IP
20

KG

1.3 kg



28 x 25 x 17 cm

Supply Voltage:

220-240 Vac, 50Hz

Driver:

DALI | Disable version available upon request

Recommended Applications:

Residential | Office | Shop







Ali Baba Office / Architect: Shift

Felka Maxi P

Light distributions



Spot(S)



Medium(M)

Order code table

Body Color	3000K	Beam Angle	4000K	Body Color
White	F320W3030S	Spot	F320W3040S	White
	F320W3030M	Medium	F320W3040M	

Body Color	3000K	Beam Angle	4000K	Body Color
Black	F320B3030S	Spot	F320B3040S	Black
	F320B3030M	Medium	F320B3040M	

Aro P



Pendant Mounted



The specific design of the lower frame with its strip reduces the direct view of the light spot and glare

Aro P

Pendant Mounted

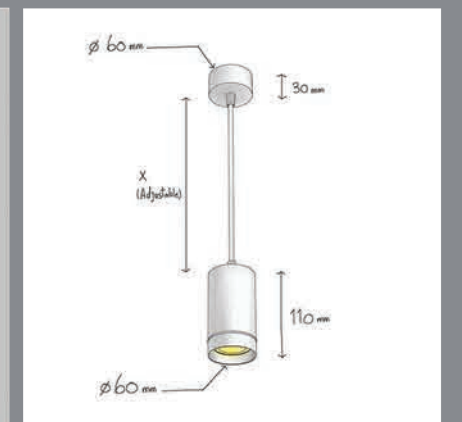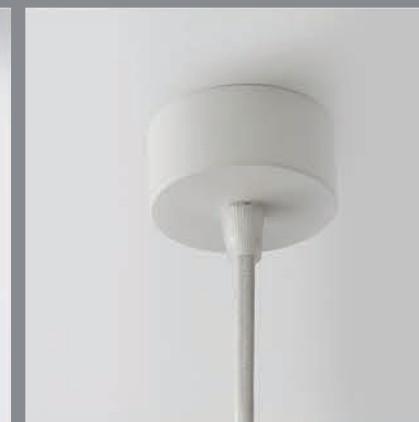

CODE	F332
Light source	LED
Power (W)	6
luminous flux (lm)	550
Color Rendering (Ra)	>80
Color Temperature (K)	3000 4000
Body Color	White Black *

*Customized body colors are available upon request



0.41 kg



17 x 13 x 9 cm



Supply Voltage:

220-240 Vac, 50Hz

Driver:

DALI | Dimmable version available upon request

Recommended Applications:

Residential | Office | Shop



Ozgol Residential / Architect: Harirchi

Aro P

Accessories

Mandatory



LED GU10 Lamp
Order code: 10020101

Order code table

Body Color	Order Code		Body Color
White	F332WG	F332BG	Black

**Lamp is not Included

Indoor Lighting

Track Light


Merbo Micro

Track Light



Merbo Micro

Track Light

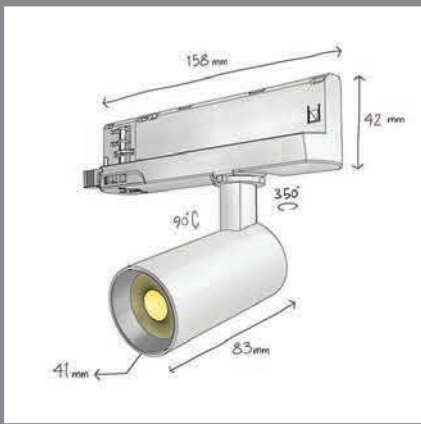

CODE	F340
Light source	LED
Power (W)	9
luminous flux (lm)	990
Color Rendering (Ra)	>80
Color Temperature (K)	3000 4000*
Body Color	White Black Brushed Gold/Copper/Alu*

*Customized body colors and other color temperatures (CCTs) are available upon request

IP

20

KG

0.24 kg

17 x 13 x 9 cm

Supply Voltage:

220-240 Vac, 50Hz

Driver:

DALI | Dimmable version available upon request

Recommended Applications:

Residential | Office | Shop | Museum | Gallery


CE

RoHS




Merbo Micro

Light distributions



Spot(S)



Medium(M)

Accessories

Track

Refer to Page 416

Order code table

Body Color	3000K 	Length (cm)	4000K 	Body Color
White	F340W930S	Spot	F340W940S	White
	F340W930M	Medium	F340W940M	
Body Color	3000K 	Length (cm)	4000K 	Body Color
Black	F340B930S	Spot	F340B940S	Black
	F340B930M	Medium	F340B940M	
Body Color	3000K 	Length (cm)	4000K 	Body Color
Brushed Copper	F340BC930S	Spot	F340BC940S	Brushed Copper
	F340BC930M	Medium	F340BC940M	
Body Color	3000K 	Length (cm)	4000K 	Body Color
Brushed Gold	F340BJ930S	Spot	F340BJ940S	Brushed Gold
	F340BJ930M	Medium	F340BJ940M	
Body Color	3000K 	Length (cm)	4000K 	Body Color
Brushed Alu	F340BA930S	Spot	F340BA940S	Brushed Alu
	F340BA930M	Medium	F340BA940M	


Merbo Mini

Track Light



Merbo Mini

Track Light

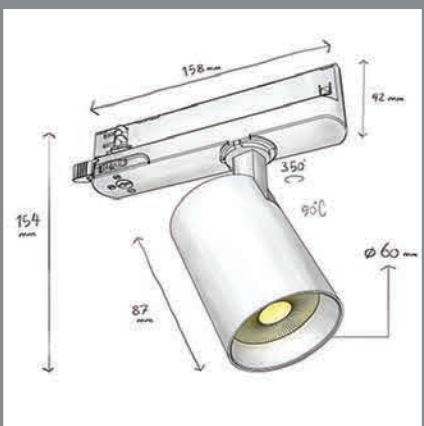

CODE	F343
Light source	LED
Power (W)	12
luminous flux (lm)	1300 1320
Color Rendering (Ra)	>80
Color Temperature (K)	3000 4000*
Body Color	White Black Brushed Copper Brushed Gold Brushed Alu*

*Customized body colors and other color temperatures (CCTs) are available upon request

IP
20

KG

0.38 kg



20 x 16 x 12 cm

Supply Voltage:
220-240 Vac, 50Hz

Driver:
DALI | Dimmable version available
upon request

Recommended Applications:
Office | Shop






Malek Gallery

Merbo Mini

Light distributions

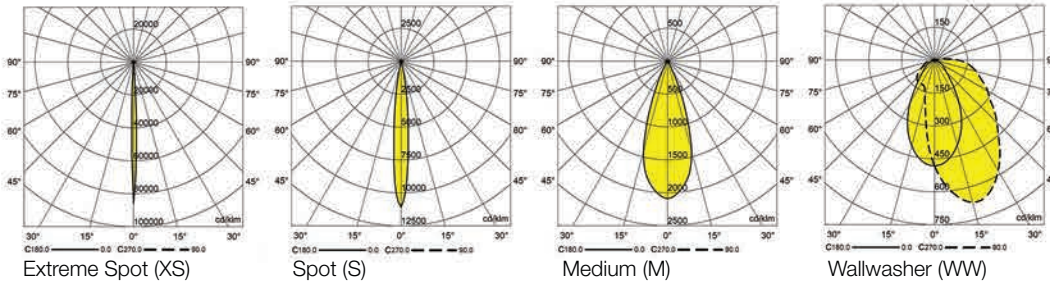

Accessories

Track



Refer to Page 416

Order code table

Body Color	3000K	Beam Angle	4000K	Body Color
White	F343W1230XS	Extreme Spot	F343W1240XS	White
	F343W1230S	Spot	F343W1240S	
	F343W1230M	Medium	F343W1240M	
	F343W1230WW	Wallwsher	F343W1240WW	
Body Color	3000K	Beam Angle	4000K	Body Color
Black	F343B1230XS	Extreme Spot	F343B1240XS	Black
	F343B1230S	Spot	F343B1240S	
	F343B1230M	Medium	F343B1240M	
	F343B1230WW	Wallwsher	F343B1240WW	
Body Color	3000K	Beam Angle	4000K	Body Color
Brushed Copper	F343BC1230XS	Extreme Spot	F343BCB1240XS	Brushed Copper
	F343BC1230S	Spot	F343BCB1240S	
	F343BC1230M	Medium	F343BC1240M	
	F343BC1230WW	Wallwsher	F343BC1240WW	
Body Color	3000K	Beam Angle	4000K	Body Color
Brushed Gold	F343BG1230XS	Extreme Spot	F343BG1240XS	Brushed Gold
	F343BG1230S	Spot	F343BG1240S	
	F343BG1230M	Medium	F343BG1240M	
	F343BG1230WW	Wallwsher	F343BG1240WW	
Body Color	3000K	Beam Angle	4000K	Body Color
Brushed Alu	F343BA1230XS	Extreme Spot	F343BA1240XS	Brushed Alu
	F343BA1230S	Spot	F343BA1240S	
	F343BA1230M	Medium	F343BA1240M	
	F343BA1230WW	Wallwsher	F343BA1240WW	


Merbo Midi

Track Light



Merbo Midi

Track Light

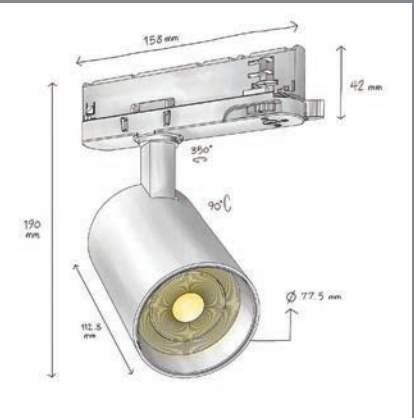

CODE	F346
Light source	LED
Power (W)	20
luminous flux (lm)	2200
Color Rendering (Ra)	>92
Color Temperature (K)	3000 4000*
Body Color	White Black

*Customized body colors and other color temperatures (CCTs) are available upon request

IP 20 78 mm (For RA Version)

KG 0.61 kg

20 x 16 x 12 cm

Supply Voltage:
220-240 Vac, 50Hz

Driver:
DALI | Dimmable version available upon request

Recommended Applications:
Office | Commercial Center | Residential | Shop






▲ Frikadell Restaurant / Architect: Nahal Hamidi



Merbo Midi

Light distributions

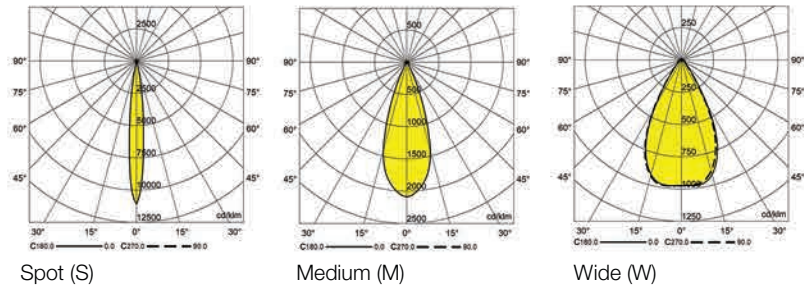

Accessories

Track



Refer to Page 416

Order code table

Body Color	3000K	Beam Angle	4000K	Body Color
White	F346W2030S	Spot	F346W2040S	White
	F346W2030M	Medium	F346W2040M	
	F346W2030W	Wide	F346W2040W	

Body Color	3000K	Beam Angle	4000K	Body Color
Black	F346B2030S	Spot	F346B2040S	Black
	F346B2030M	Medium	F346B2040M	
	F346B2030W	Wide	F346B2040W	


Merbo Maxi

Track Light



Merbo Maxi

Track Light

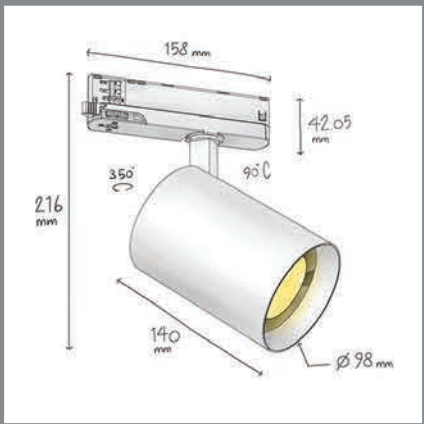

CODE	F349
Light source	LED
Power (W)	30
luminous flux (lm)	3300
Color Rendering (Ra)	>80
Color Temperature (K)	3000 4000*
Body Color	White Black

*Customized body colors and other color temperatures (CCTs) are available upon request



1.03 kg



28 x 25 x 17 cm

Supply Voltage:
220-240 Vac, 50Hz

Driver:
DALI | Dimmable version available
upon request

Recommended Applications:
Residential | Office | Shop



Specific design of the bottom frame with it's strips reduce the direct view to the light point and of course glare




▲ Reisser Showroom, Frankfurt/ Architect: GermanyBelzner+Holmes Light Design




Merbo Maxi

Light distributions

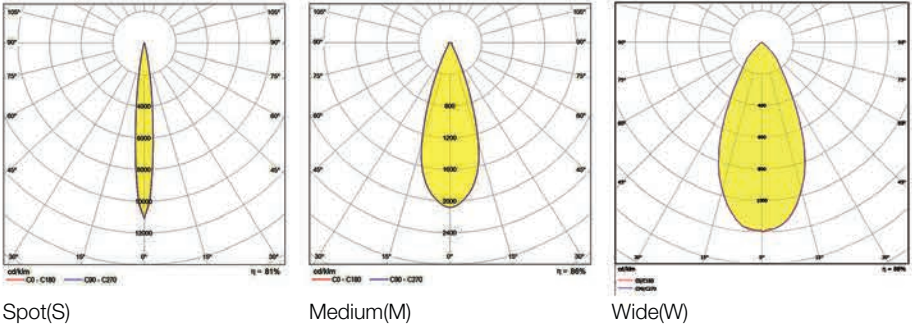

Accessories

Track



Refer to page 416

Order code table

Body Color	3000K	Beam Angle	4000K	Body Color
White	F349W3030S	Spot	F349W3040S	White
	F349W3030M	Medium	F349W3040M	
	F349W3030W	Wide	F349W3040W	

Body Color	3000K	Beam Angle	4000K	Body Color
Black	F349B3030S	Spot	F349B3040S	Black
	F349B3030M	Medium	F349B3040M	
	F349B3030W	Wide	F349B3040W	




Merbo Maxi BS

Light distributions




Spot(S)



Medium(M)



Wide(W)




Squar(SQ)



Oval(O)

Accessories

Track



Refer to page 416

Order code table

Body Color	3000K	Beam Angle	4000K	Body Color
White	F349W3030BS	Beam Shaping	F349W3040BS	White
Body Color	3000K	Beam Angle	4000K	Body Color
Black	F349B3030BS	Beam Shaping	F349B3040BS	Black


Armo Maxi

Track Light



Armo Maxi

Track Light

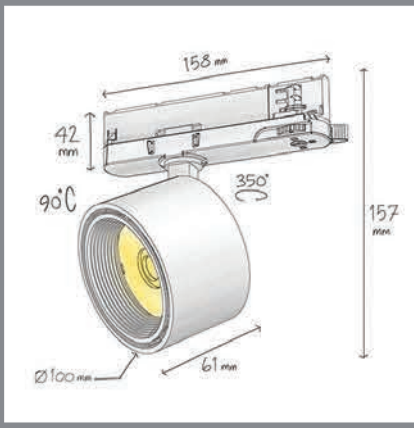

CODE	F360
Light source	LED
Power (W)	30
luminous flux (lm)	3300
Color Rendering (Ra)	>80
Color Temperature (K)	3000 4000*
Body Color	White Black

*Customized body colors and other color temperatures (CCTs) are available upon request

IP 20

CE

KG

0.76 kg

20 x 16 x 12 cm

Supply Voltage:

220-240 Vac, 50Hz

Driver:

DALI | Dimmable version available upon request


Recommended Applications:

Residential | Office | Shop



Armo Maxi

Light distributions

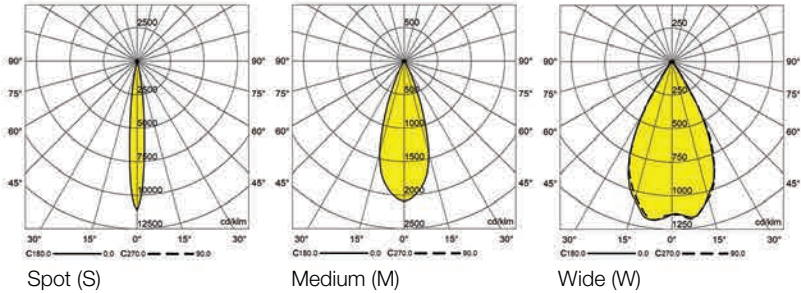

Accessories

Track



Refer to page 416

Order code table

Body Color	3000K	Beam Angle	4000K	Body Color
White	F360W3030S	Spot	F360W3040S	White
	F360W3030M	Medium	F360W3040M	
	F360W3030W	Wide	F360W3040W	

Body Color	3000K	Beam Angle	4000K	Body Color
Black	F360B3030S	Spot	F360B3040S	Black
	F360B3030M	Medium	F360B3040M	
	F360B3030W	Wide	F360B3040W	



Armo Maxi BS


Light distributions




Spot(S)



Medium(M)



Wide(W)




Squar(SQ)



Oval(O)

Accessories

Track



Refer to page 416

Order code table

Body Color	3000K	Beam Angle	4000K	Body Color
White	F360W3030BS	Beam Shaping	F360W3040BS	White
Body Color	3000K	Beam Angle	4000K	Body Color
Black	F360B3030BS	Beam Shaping	F360B3040BS	Black

Felka Mini


Track Light



9 Different light distributions for almost all applications

Felka Mini

Track Light

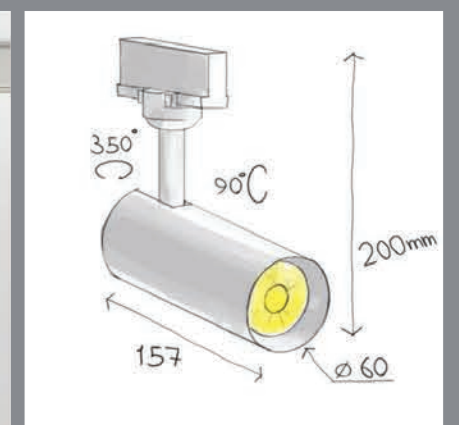

CODE	F315
Light source	LED
Power (W)	12
luminous flux (lm)	1300 1320
Color Rendering (Ra)	>80
Color Temperature (K)	3000 4000*
Body Color	White Black*

*Customized body colors and other color temperatures (CCTs) are available upon request



0.48 kg



20 x 16 x 12 cm



Supply Voltage:

220-240 Vac, 50Hz

Driver:

DALI | Dimmable version available upon request

Recommended Applications:

Residential | Office | Shop | Gallery | Museum




▲ Carpet Gallery ASP Residential / Architect: Gozar Andisheh 2018 ▼



Felka Mini

Light distributions

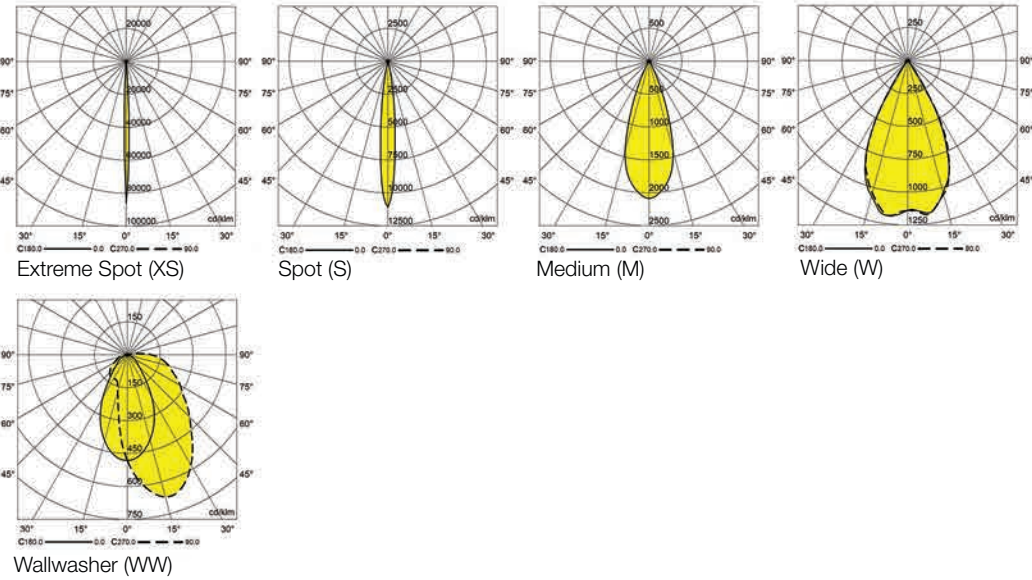

Accessories

Track



Refer to page 416

Order code table

Body Color	3000K	Beam Angle	4000K	Body Color
White	F315W1230XS	Extreme Spot	F315W1240XS	White
	F315W1230S	Spot	F315W1240S	
	F315W1230M	Medium	F315W1240M	
	F315W1230W	Wide	F315W1240W	
	F315W1230WW	Wallwasher	F315W1240WW	

Body Color	3000K	Beam Angle	4000K	Body Color
Black	F315B1230XS	Extreme Spot	F315B1240XS	Black
	F315B1230S	Spot	F315B1240S	
	F315B1230M	Medium	F315B1240M	
	F315B1230W	Wide	F315B1240W	
	F315B1230WW	Wallwasher	F315B1240WW	







▼ Argo Factory / Architect: Ahmad Reza Shereker ▲



▲ Argo Factory / Architect: Ahmad Reza Shereker ▼



Belta

Track Light



Belta

Track Light



CODE	F390
Light source	LED
Power (W)	12
luminous flux (lm)	1300 1320
Color Rendering (Ra)	>80
Color Temperature (K)	3000 4000*
Body Color	White Black Brushed Copper Brushed Gold Brushed Alu*

*Customized body colors and other color temperatures (CCTs) are available upon request



0.56 kg
20 x 16 x 12 cm

Supply Voltage:
220-240 Vac,50Hz
Driver:
DALI | Dimmable version available upon request
Recommended Applications:
Residential | Office | Shop | Gallery | Museum

Elegant Design, fascinating surface treatment
European Product Design Award 2020




▲ Cafe Bistro Chahar / Architect: Roshanak Tehran Studio



Belta

Light distributions

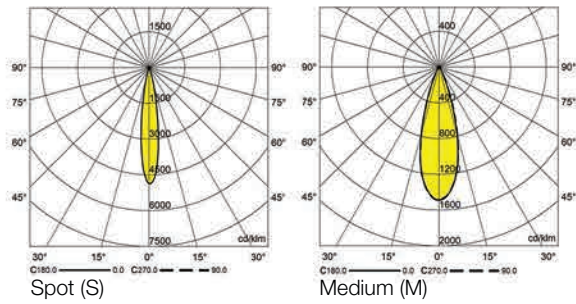

Accessories

Track



Refer to page 416


Order code table

Body Color	3000K	Beam Angle	4000K	Body Color
White	F390W1230S	Spot	F390W1240S	White
	F390W1230M	Medium	F390W1240M	
Body Color	3000K	Beam Angle	4000K	Body Color
Black	F390B1230S	Spot	F390B1240S	Black
	F390B1230M	Medium	F390B1240M	
Body Color	3000K	Beam Angle	4000K	Body Color
Brushed Copper	F390BC1230S	Spot	F390BC1240S	Brushed Copper
	F390BC1230M	Medium	F390BC1240M	
Body Color	3000K	Beam Angle	4000K	Body Color
Brushed Gold	F390BG1230S	Spot	F390BG1240S	Brushed Gold
	F390BG1230M	Medium	F390BG1240M	
Body Color	3000K	Beam Angle	4000K	Body Color
Brushed Alu	F390BA1230S	Spot	F390BA1240S	Brushed Alu
	F390BA1230M	Medium	F390BA1240M	



Aro

Track Light

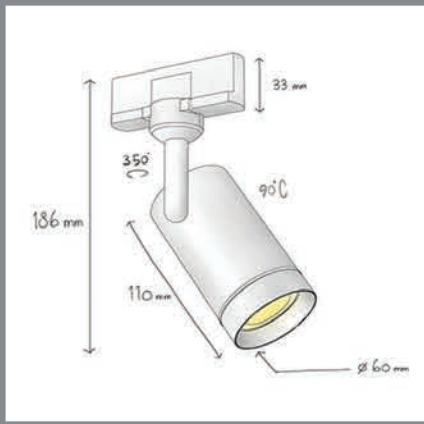

CODE	F330
Light source	LED
Power (W)	6
luminous flux (lm)	550
Color Rendering (Ra)	>80
Color Temperature (K)	3000 4000*
Body Color	White Black*

*Customized body colors and other color temperatures (CCTs) are available upon request

IP 20

KG 0.36 kg

17 x 13 x 9 cm

CE


RoHS

Grounding

Supply Voltage:
220-240 Vac,50Hz

Driver:
DALI | Dimmable version available upon request

Recommended Applications:
Office | Shop

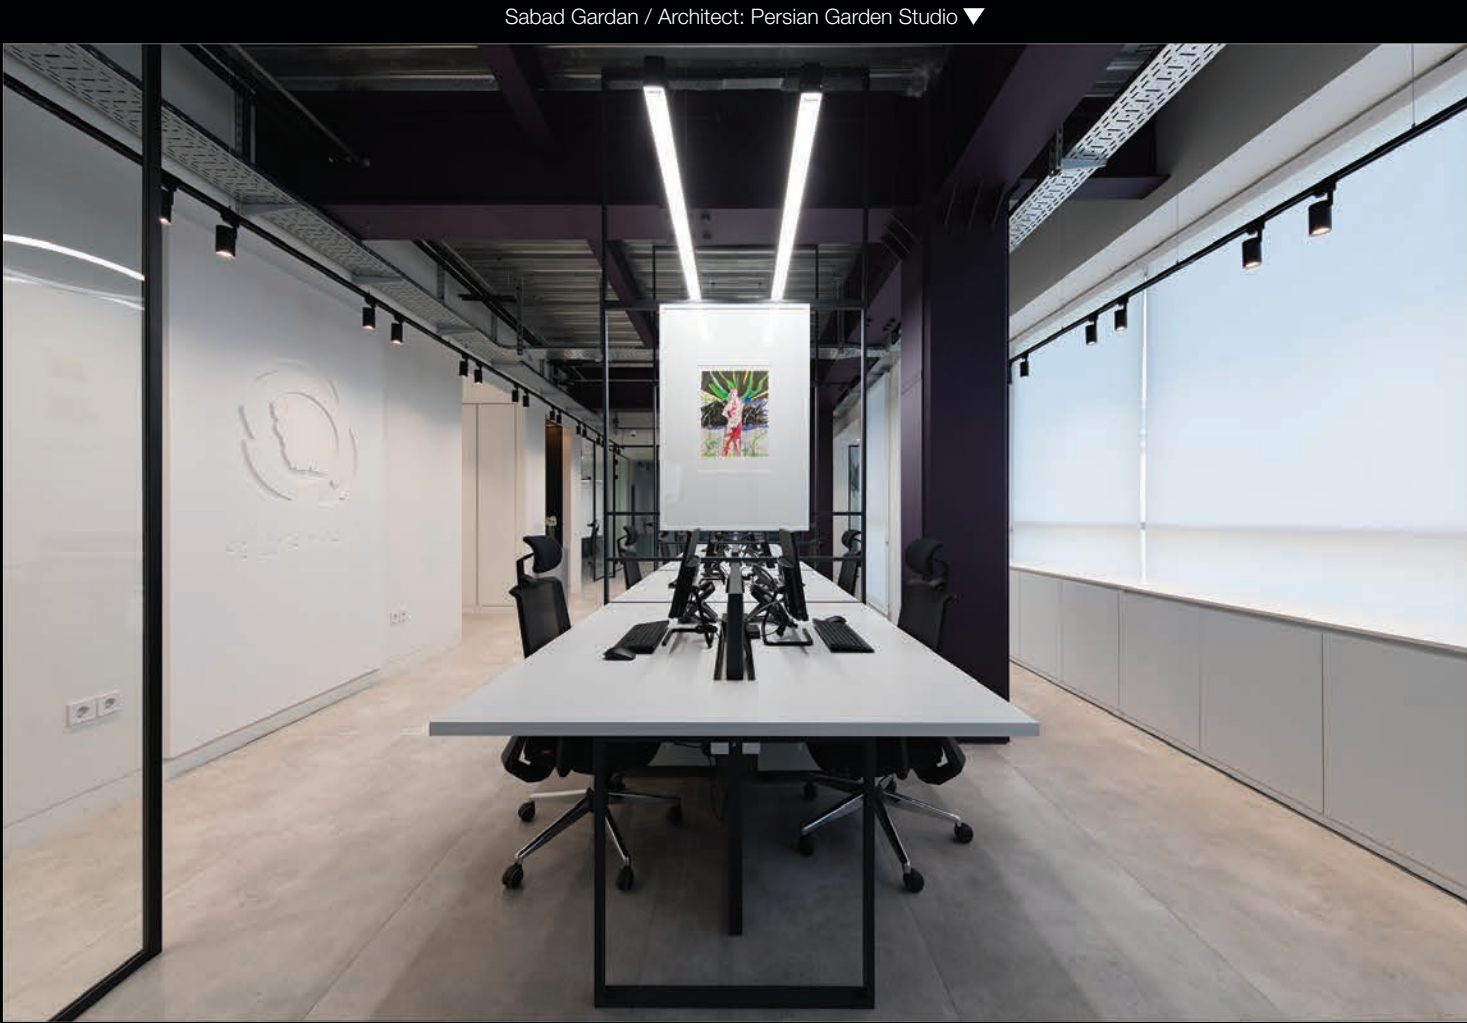

Aro


Accessories

Optional



LED GU10 Lamp
Order code: 10020101

Track



Refer to page 416

Order code table

Body Color	Body Code		Body Color
White	F330WG	F330BG	Black

Customize Color Available

**Lamp is not Included

Valman T


Track Light



Vertical illumination is becoming more and more important for architects and lighting designers. It is important for architects because it reveals the feel of the space, and helps the place to become even more inviting. It is important for shop owners because it makes the shop become more visible and appear brighter from outside. In an office it helps to provide better visual comfort.

Valman T

Track Light

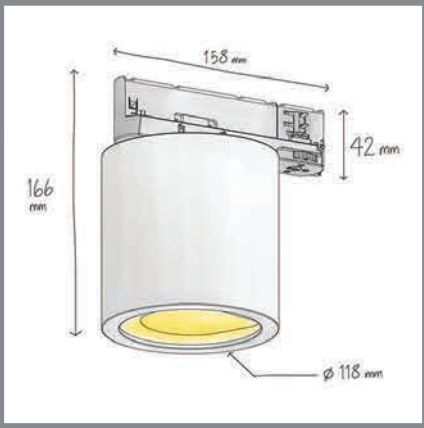

CODE	F361
Light source	LED
Power (W)	30
luminous flux (lm)	3300
Color Rendering (Ra)	>80
Color Temperature (K)	3000 4000*
Body Color	White Black

*Customized body colors and other color temperatures (CCTs) are available upon request

IP 20



KG

1.17 kg



28 x 25 x 17 cm

Supply Voltage:

220-240 Vac, 50Hz

Driver:

DALI | Dimmable version available upon request


Recommended Applications:

Office | Shop | Museum | Gallery



Valman T

Light distributions



WallWasher (WW)

Accessories

Track



Refer to page 416

Order code table

Body Color	3000K	Beam Angle	4000K	Body Color
White	F361W3030WW	WallWasher	F361W3040WW	Black



Specific design of the bottom frame with it's strips reduce the direct view to the light point and of course glare

Risen

Track Light



CODE	F362
Light source	LED
Power (W)	54
luminous flux (lm)	9600 / 10100
Color Rendering (Ra)	>80
Color Temperature (K)	3000 4000*
Body Color	White Black*

*Customized body colors and other color temperatures (CCTs) are available upon request



3.4 kg

65 x 20 x 15 cm

Supply Voltage:

220-240 Vac,50Hz

Driver:

DALI | Dimmable version available upon request

Recommended Applications:

Residential | Office | Shop Museum | Gallery






▲ Reisser Showroom, Frankfurt / Architect: Germany / Belzner+Holmes Light Design



Risen

Light distributions

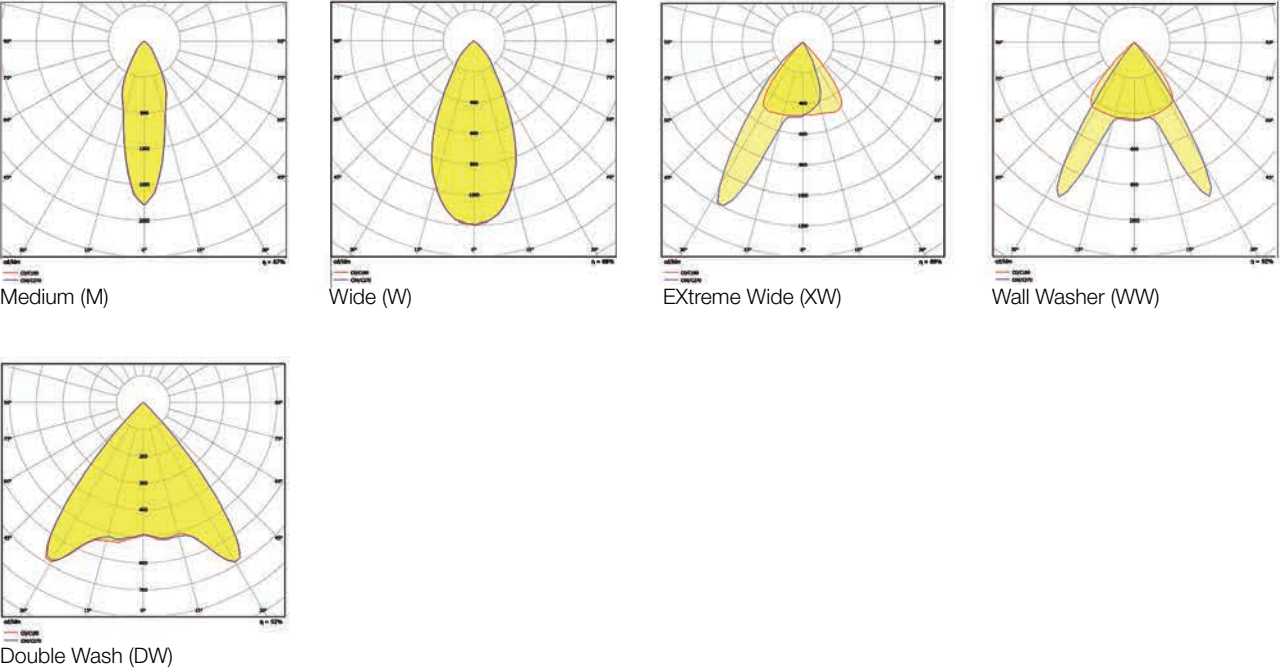

Accessories

Optional



Refer to page 416

Order code table

Body Color	3000K	Beam Angle	4000K	Body Color
White	F362W5430M	Medium	F362W5440M	White
	F362W5430W	Wide	F362W5440W	
	F362W5430XW	Extreme Wide	F362W5440XW	
	F362W5430WW	Wallwasher	F362W5440WW	
	F362W5430DW	Double Wash	F362W5440DW	

Body Color	3000K	Beam Angle	4000K	Body Color
Black	F362B5430M	Medium	F362B5440M	Black
	F362B5430W	Wide	F362B5440W	
	F362B5430XW	Extreme Wide	F362B5440XW	
	F362B5430WW	Wallwasher	F362B5440WW	
	F362B5430DW	Double Wash	F362B5440DW	



Indoor Lighting

Linear Light

Sira V 1616


Sira TR 1616

Sira OL

Sira R 1616

Sira S 1616



16mm



Sira R 4040

Sira R 6040



40mm

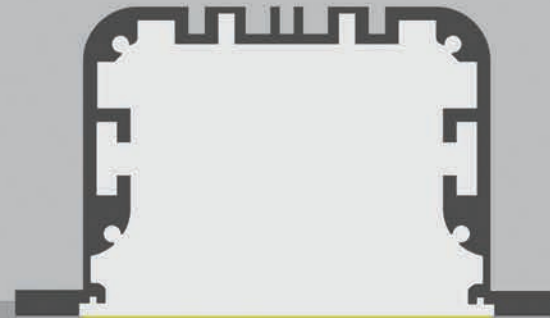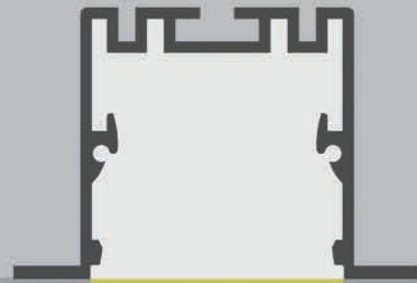


Sira S 4090

Sira S 6090

90mm

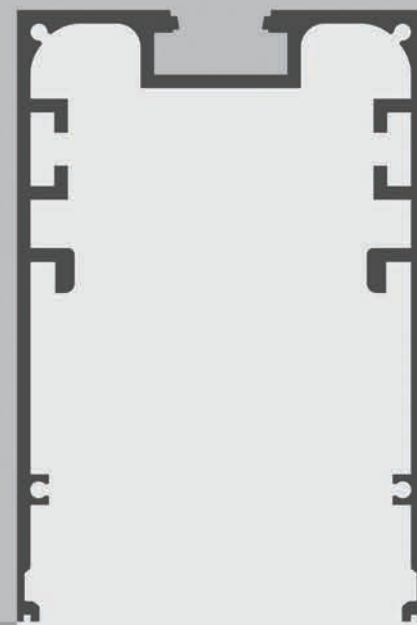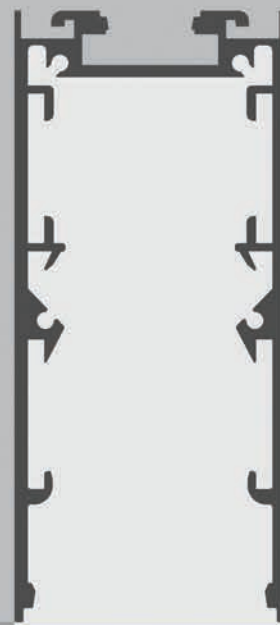

Sira R 6090

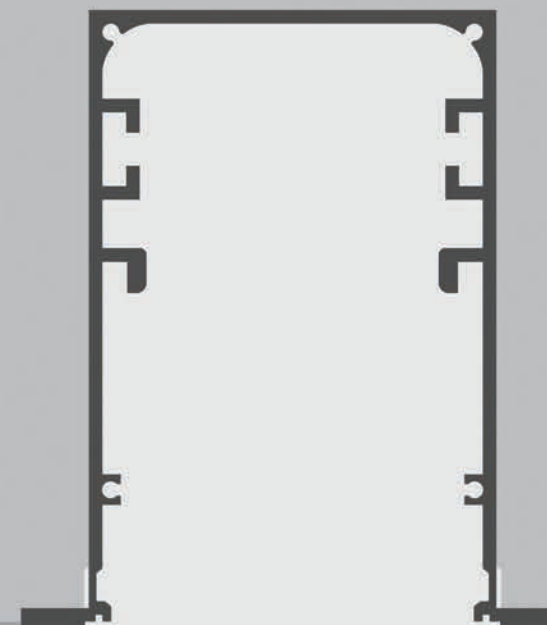



Sira TR 1616

Linear Light



Sira TR 1616

Linear Light

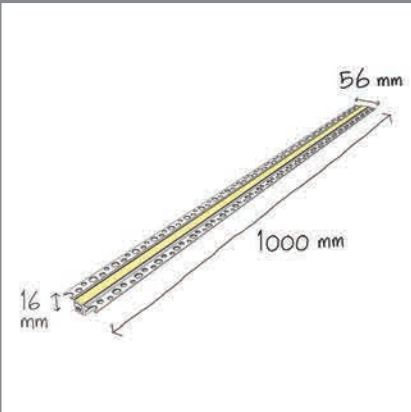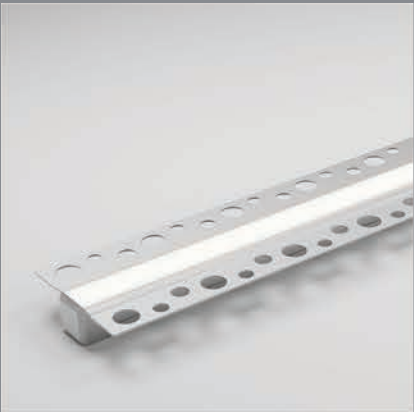

CODE	F468
Light source	LED
Power (W)	10
luminous flux (lm)	1100
Color Rendering (Ra)	>80
Color Temperature (K)	3000 4000*
Body Color	Silver

IP 20 17 mm

KG 0.24 kg/m

127Ø x 100 cm

Supply Voltage:
220-240 Vac, 50Hz

Driver:
DALI | Dimmable version available upon request

Recommended Applications:
Residential | Office | Shop


*Customized body colors and other color temperatures (CCTs) are available upon request

Specific design of the bottom frame with it's strips reduce the direct view to the light point and of course glare



Sira TR 1616


Light distributions



Wide (W)

Accessories

Optional




LED Strip
Refer to page 418

Order code table

Body Color	Order Code	Beam Angle
Anodized silver	F468ASW	Wide

Sira R 1616

Linear Light

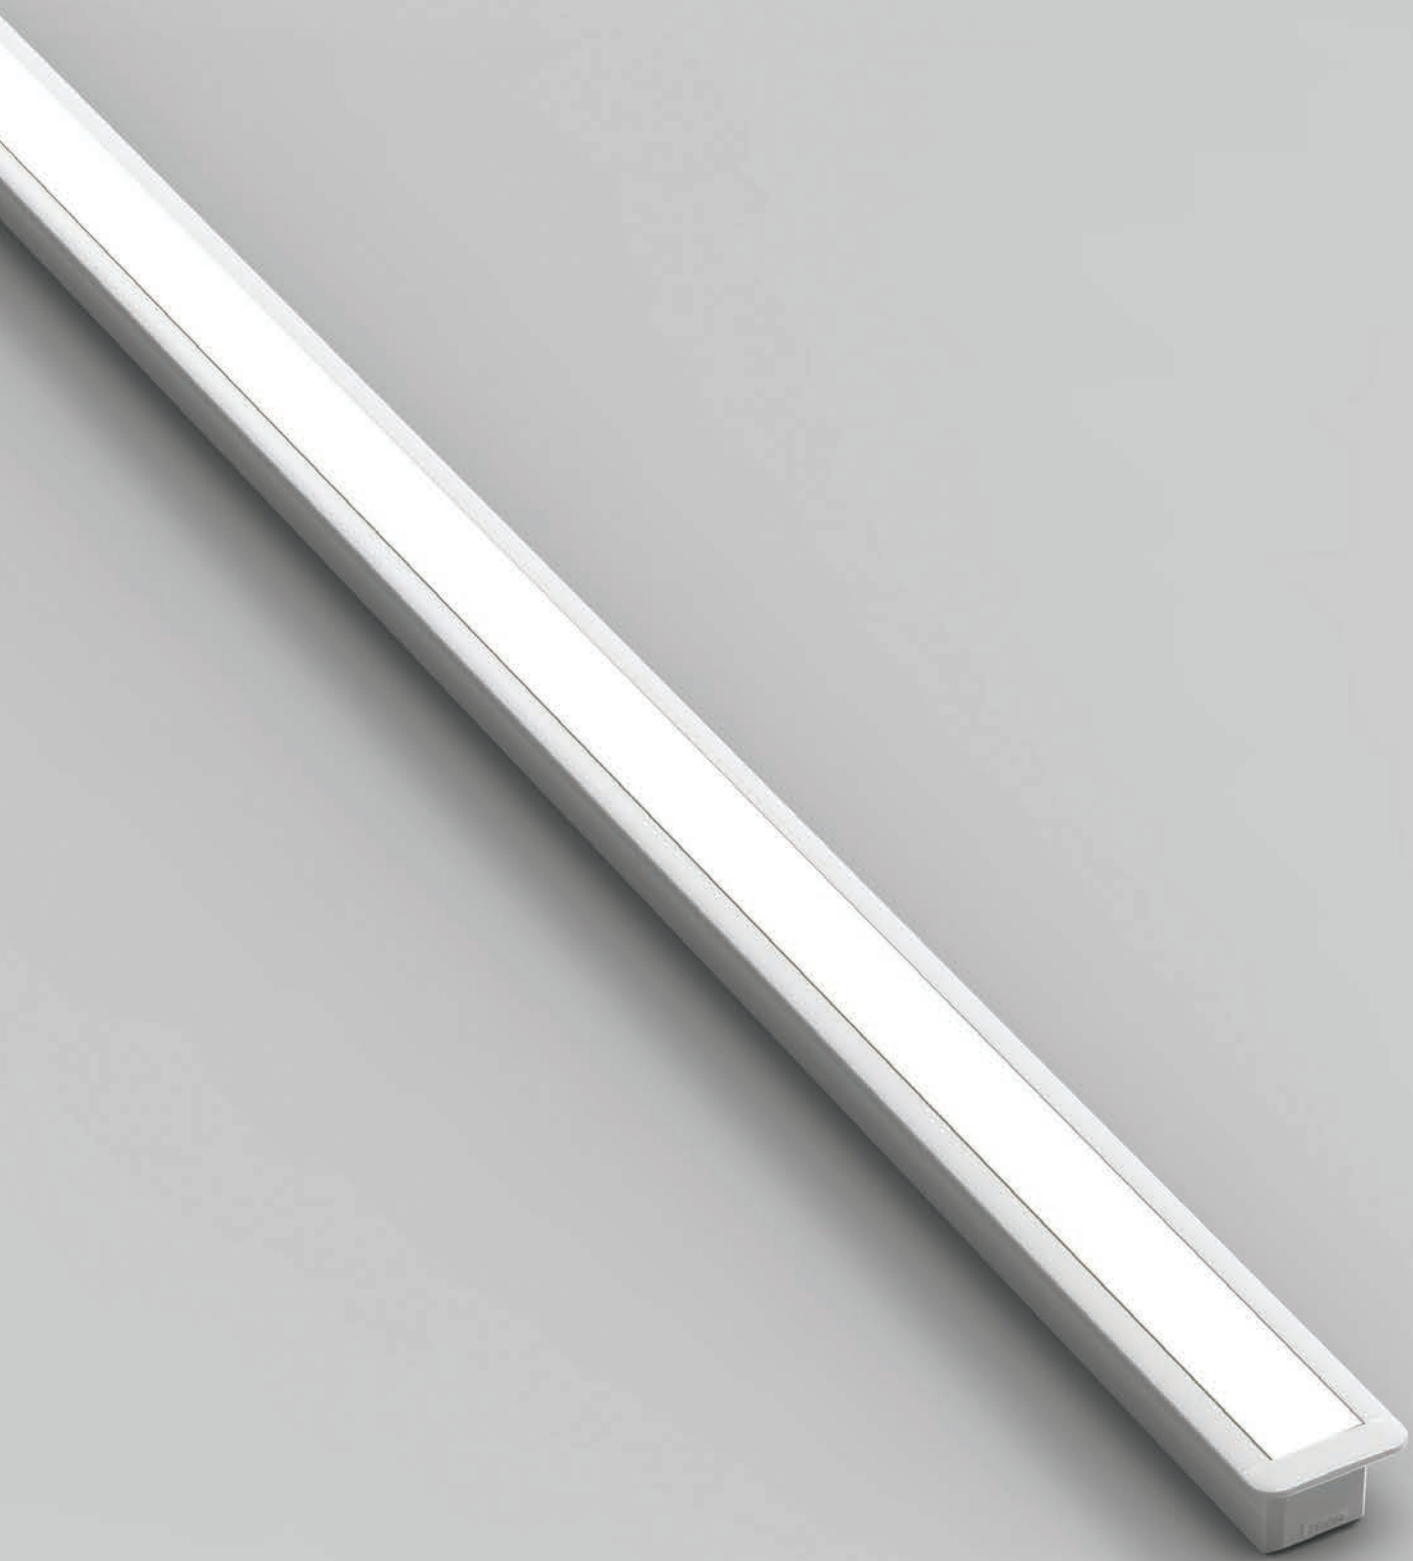


Very small and compact, suitable for recessed applications where size is limited such as shelf lighting.

Sira R 1616



Linear Light

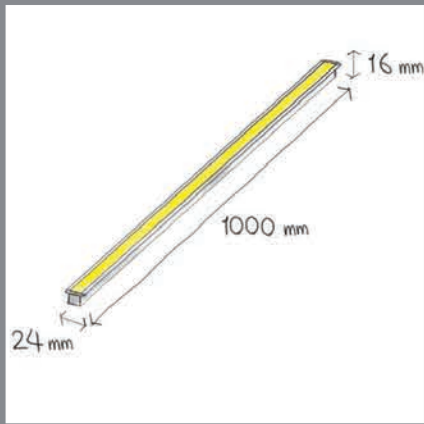

CODE	F467
Light source	LED
Power (W)	10
luminous flux (lm)	1100
Color Rendering (Ra)	>80
Color Temperature (K)	3000 4000*
Body Color	Black White Silver

*Customized body colors and other color temperatures (CCTs) are available upon request



0.21 Kg/m



127Ø x 100 cm

Recommended Applications:


Residential | Office | Shop



Aban Residential / Architect: Gozar Andisheh


Sira R 1616

Light distributions




Accessories

Recessed Installation

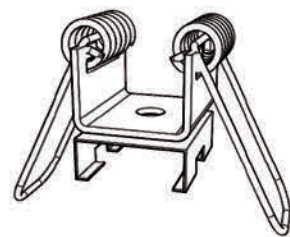

Sira R 1616 Bracket

Optional



LED Strip
Refer to page 418

Order code table

Body Color	Order Code	Beam Angle
White	F467WW	Wide
Black	F467BW	Wide
Silver	F467SW	Wide

*Customized body colors and other color temperatures (CCTs) are available upon request


Sira V 1616

Linear Light



Sira V 1616

Linear Light

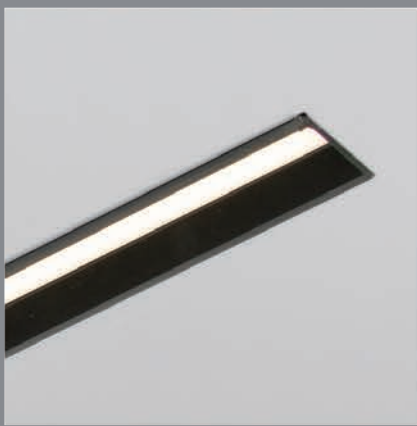

CODE	F463
Light source	LED
Power (W)	10
luminous flux (lm)	1100
Color Rendering (Ra)	>80
Color Temperature (K)	3000 4000
Body Color	White Black

IP 20	17 mm	CE
KG	0.29 kg/m	
	1270 x 100 cm	

Recommended Applications:
Residential | Office | Shop


*Customized body colors and other color temperatures (CCTs) are available upon request

Specific design of the bottom frame with it's strips reduce the direct view to the light point and of course glare



Sira V 1616


Light distributions



Wide (W)


Accessories

Recessed Installation

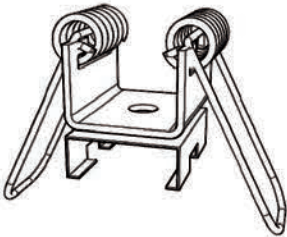

Sira V 1616 Bracket

Optional



LED Strip
Refer to page 418

Order code table

Body Color	Order Code	Beam Angle	Order Code	Body Color
White	F463WW	Wide	F463BW	Black




Sira S 1616

Linear Light



Sira S 1616

Linear Light

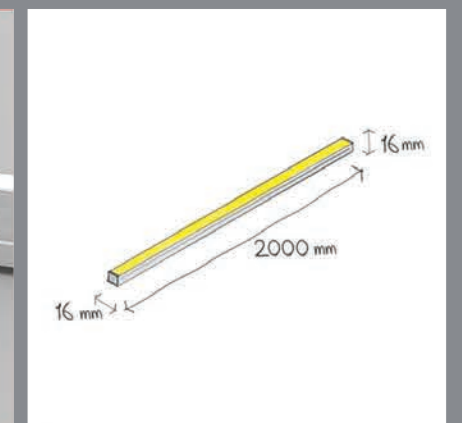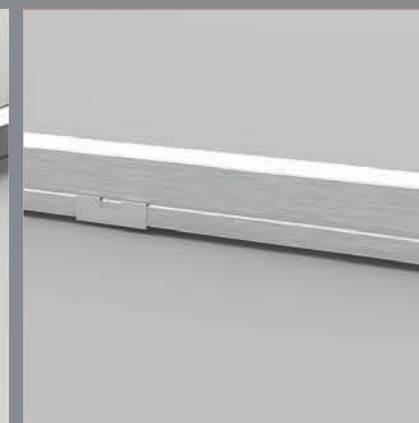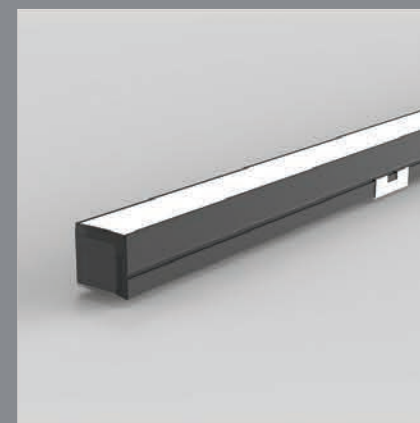

CODE	F466
Light source	LED
Power (W)	10
luminous flux (lm)	1100
Color Rendering (Ra)	>80
Color Temperature (K)	3000 4000
Body Color	White Black

*Customized body colors and other color temperatures (CCTs) are available upon request



0.27 kg/m



127Ø x 100 cm



Recommended Applications:
Residential | Office | Shop

Very small and compact, suitable for many applications where size is limited




▲ Loutka Restaurant / Architect: Arsh 40 Studio 2019 Kafi Abadi Residential / Architect: Bonsar ▼



Sira S 1616

Light distributions






Accessories

Surface Installation

Optional

Optional

Optional



Sira S1616 Bracket

LED Strip
Refer to page 418

Krab 36
Refer to page 364

Krab 16
Refer to page 368

Order code table

Body Color	3000K	Beam Angle	4000K	Body Color
White	F466W1030W-20	Wide	F466W1040W-20	White
	F466W1030W-65	Wide	F466W1040W-65	

Body Color	3000K	Beam Angle	4000K	Body Color
Black	F466B1030W-20	Wide	F466B1040W-20	Black
	F466B1030W-65	Wide	F466B1040W-65	

*Customized body colors and other color temperatures (CCTs) are available upon request

Sira OL




Linear Light



Very small and compact, suitable for many applications where size is limited

Sira OL

Linear Light

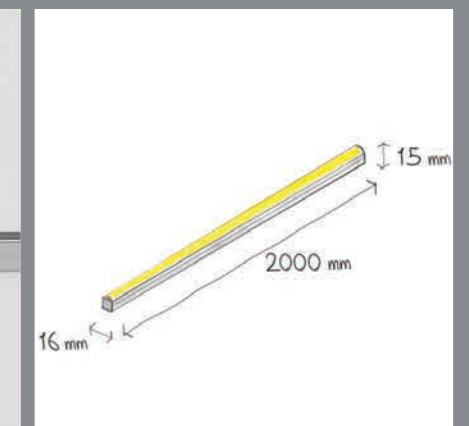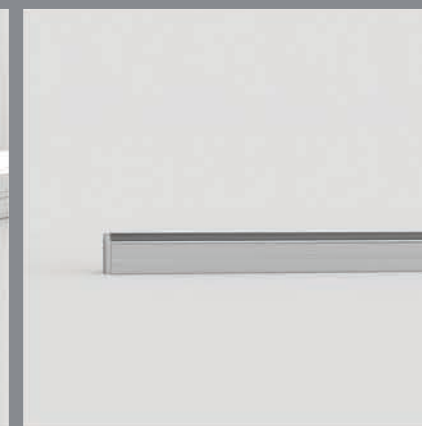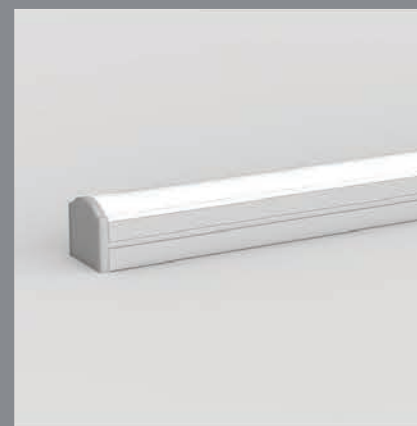

CODE	F470
Light source	LED
Power (W)	10
luminous flux (lm)	1100
Color Rendering (Ra)	>80
Color Temperature (K)	3000 4000
Body Color	White Black

*Customized body colors and other color temperatures (CCTs) are available upon request



0.16 kg/m



127Ø x 100 cm

Recommended Applications:


Residential | Office | Shop | Garden
Facade






Sira OL

Light distributions




Accessories

Surface Installation



Sira OL Bracket

Optional



LED Strip
Refer to page 418


Order code table

Body Color	Order Code	Beam Angle
Silver	F470S1030S	Spot
	F470S1040S	Spot

*Customized body colors and other color temperatures (CCTs) are available upon request


Sira R 4040

Linear Light

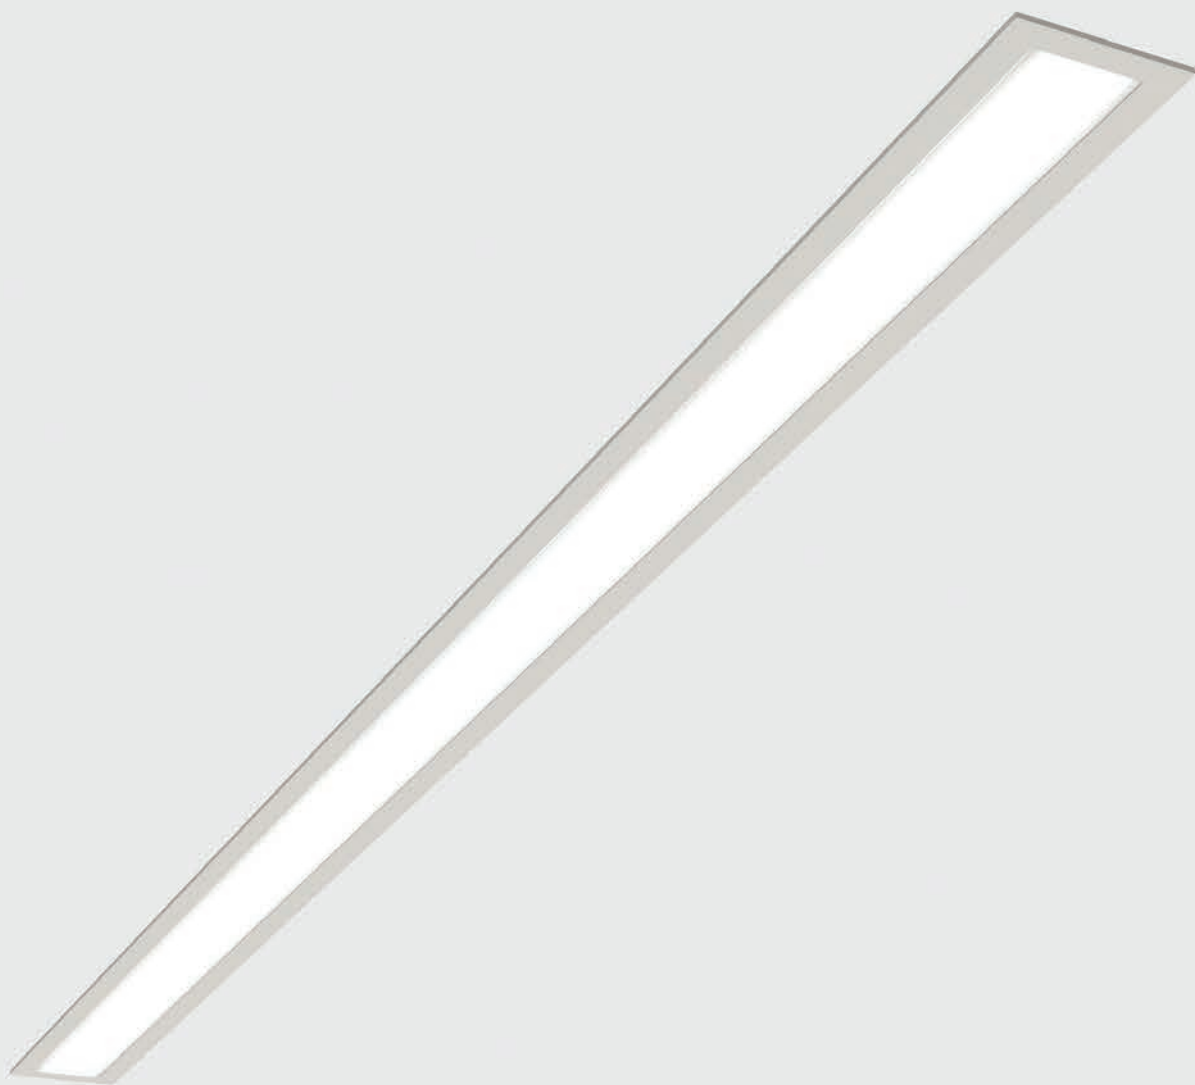

Sira R 4040

Linear Light

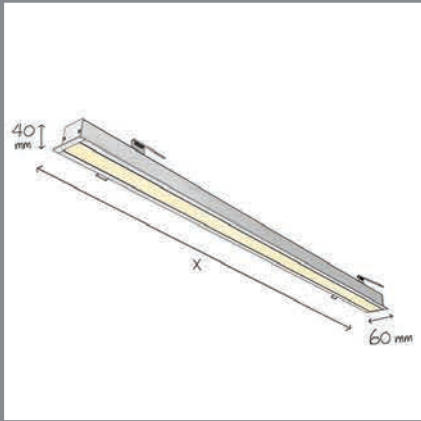

CODE	F449
Light source	LED
Power (W)	30
luminous flux (lm)	4000
Color Rendering (Ra)	>80
Color Temperature (K)	3000 4000*
Body Color	White Black

*Customized body colors and other color temperatures (CCTs) are available upon request


IP 20	42mm	CE	□
KG	1.6 kg/m		
Box	1270 x 100 cm		

Supply Voltage:
220-240 Vac, 50Hz
Driver:
DALI | Dimmable version available upon request
Recommended Applications:
Residential | Office | Shop




Sira R 4040

Light distributions




Wide (W)

Accessories



Solid Aluminium Cover
Order Code:
White: 2420215106
Black: 2420115106



Merbora Micro
Refer to page 350

Order code table

Body Color	3000K	Length (cm)	4000K	Body Color
White	F449W3530W	114	F449W3540W	White
	F449W5030W	168	F449W5040W	

Body Color	3000K	Length (cm)	4000K	Body Color
Black	F449B3530W	114	F449B3540W	Black
	F449B5030W	168	F449B5040W	

The above order table code is for standard lengths of 114 and 168 cm. To order other lengths, than standard shapes, please refer to our sales support team to help you.



Sira S 4090


Linear Light



Specific design of the bottom frame with it's strips reduce the direct view to the light point and of course glare

Sira S 4090

Linear Light

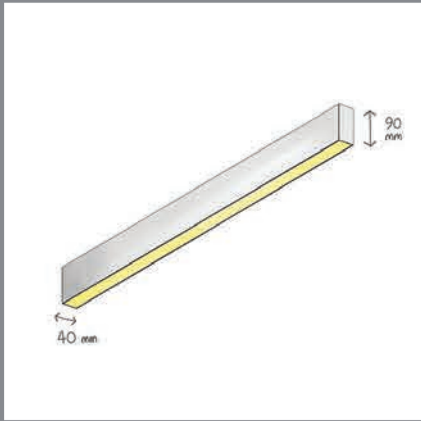

CODE	F420
Light source	LED
Power (W)	30 / 50*
luminous flux (lm)	4000
Color Rendering (Ra)	>80
Color Temperature (K)	3000 4000**
Body Color	White Black

*Customized body colors and other color temperatures (CCTs) are available upon request



2 kg/m



127Ø x 100 cm



Supply Voltage:

220-240 Vac,50Hz

Driver:

DALI | Dimmable version available upon request


Recommended Applications:

Residential | Office | Shop



Sira S 4090

Light distributions



Wide (W)


Accessories

Optional



Solid Aluminium Cover
Order Code:
White: 2420215106
Black: 2420115106

Optional



Merbora Micro
Refer to page 350

Order code table


Body Color	3000K	Length (cm)	4000K	Body Color
White	F420W3530W	114	F420W3540W	White
	F420W5030W	168	F420W5040W	

Body Color	3000K	Length (cm)	4000K	Body Color
Black	F420B3530W	114	F420B3540W	Black
	F420B5030W	168	F420B5040W	

The above order table code is for standard lengths of 114 and 168 cm. To order other lengths, than standard shapes, please refer to our sales support team to help you.



Sira P 4090

Linear Light

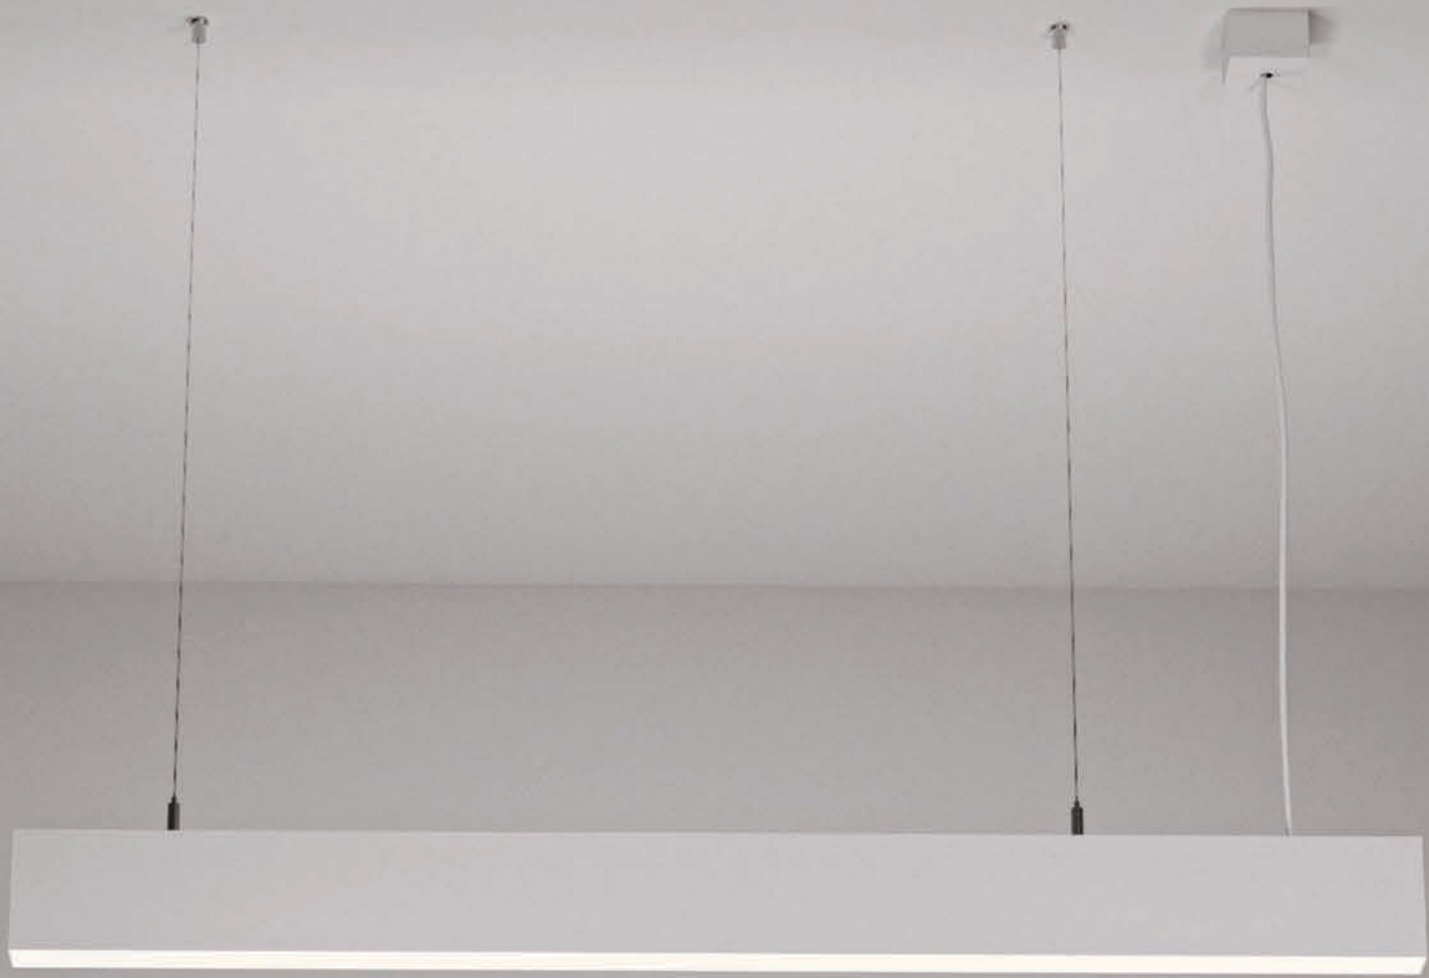

Sira P 4090

Linear Light

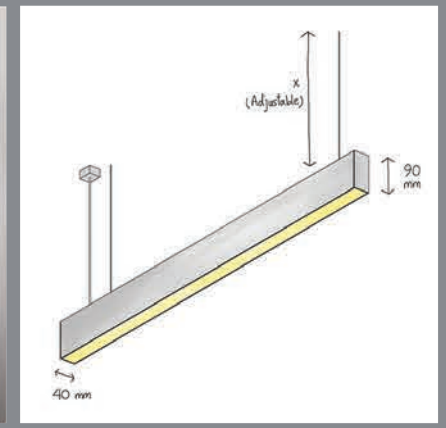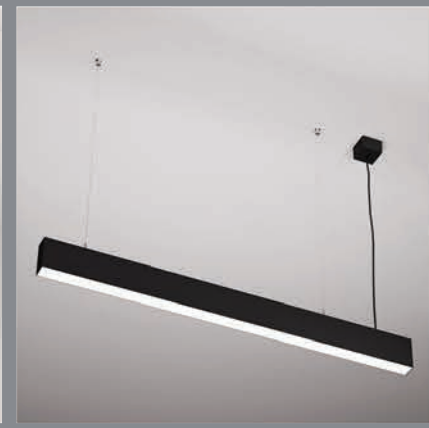

CODE	F422
Light source	LED
Power (W)	30 / 50*
luminous flux (lm)	4000
Color Rendering (Ra)	>80
Color Temperature (K)	3000 4000**
Body Color	White Black

*114 Cm : 35W / 168Cm : 50W
**Customized body colors and other color temperatures (CCTs) are available upon request

IP 20

KG

2.3 kg/m

1270 x 100 cm

Supply Voltage:
220-240 Vac,50Hz

Driver:
DALI | Dimmable version available upon request

Recommended Applications:
Residential | Office | Shop




▲ Charisma Holding / Dash Studio Office



Sira P 4090

Light distributions



Wide (W)


Accessories

Optional



Solid Aluminium Cover
Order Code:
White: 2420215106
Black: 2420115106

Optional



Merbora Micro
Refer to page 350

Order code table

Body Color	3000K	Length (cm)	4000K	Body Color
White	F422W3530W	114	F422W3540W	White
	F422W5030W	168	F422W5040W	

Body Color	3000K	Beam Angle	4000K	Body Color
Black	F422B3530W	114	F422B3540W	Black
	F422B5030W	168	F422B5040W	

The above order table code is for standard lengths of 114 and 168 cm. To order other lengths, than standard shapes, please refer to our sales support team to help you.

Sira R 6040


Linear Light



Continuous Linear light with 60 mm light emitting width

Sira R 6040

Linear Light

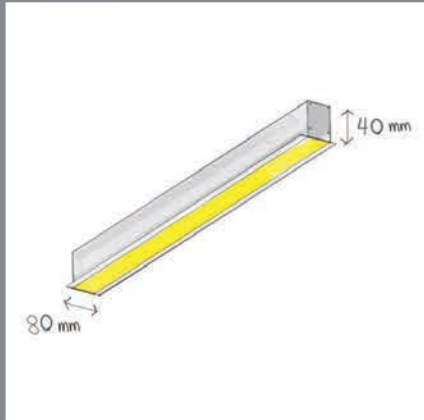

CODE	F403
Light source	LED
Power (W)	30
luminous flux (lm)	4000
Color Rendering (Ra)	>80
Color Temperature (K)	3000 4000*
Body Color	White Black*

*Customized body colors and other color temperatures (CCTs) are available upon request

IP 20

KG

Box

70 mm

2.4 kg/m

1270 x 100 cm

CE

RoHS

III

Supply Voltage:
220-240 Vac, 50Hz

Driver:
DALI | Dimmable version available upon request


Recommended Applications:
Residential | Office | Shop



Charima Office / Architect: Cando Archineering Group

Sira R 6040

Light distributions




Accessories

Optional




Solid Aluminium Cover
Order code:
White:2451215106
Black: 2451115106

Optional



Merbora Mini
Refer to page 354

Optional



Arora
Refer to page 358

Order code table

Body Color	3000K	Length (cm)	4000K	Body Color
White	F403W3530W	114	F403W3540W	White
	F403W5030W	168	F403W5040W	
Body Color	3000K	Length (cm)	4000K	Body Color
Black	F403B3530W	114	F403B3540W	Black
	F403B5030W	168	F403B5040W	

The above order table code is for standard lengths of 114 and 168 cm. To order other lengths, than standard shapes, please refer to our sales support team to help you.




Sira R 6090

Linear Light



Continuous Linear light with 60 mm light emitting width

Sira R 6090

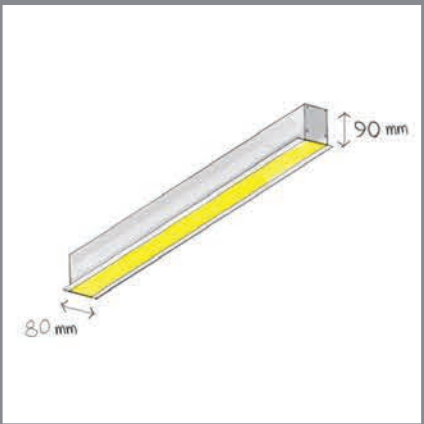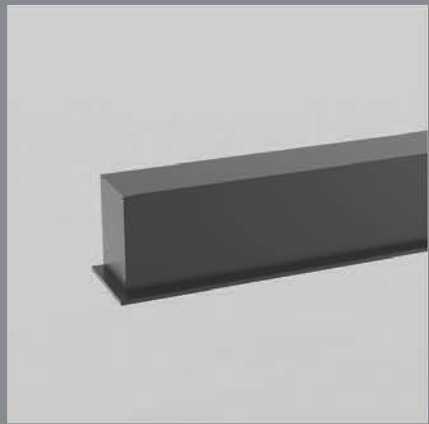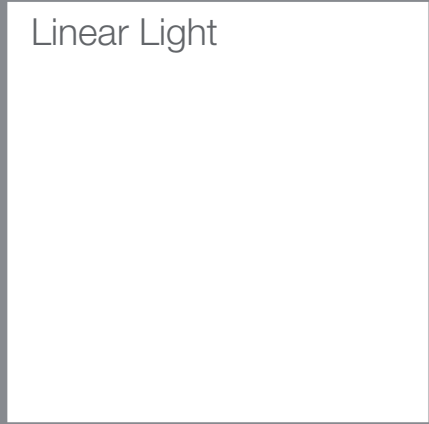

CODE	F452
Light source	LED
Power (W)	30 50*
luminous flux (lm)	4000
Color Rendering (Ra)	>80
Color Temperature (K)	3000 4000**
Body Color	White Black**

*114Cm:35W | 168Cm:50W
**Customized body colors and other color temperatures (CCTs) are available upon request

IP 20

 70 mm

 3.4 kg/m

 127Ø x 100 cm

Supply Voltage:
220-240 Vac,50Hz
Driver:
DALI | Dimmable version available upon request
Recommended Applications:
Residential | Office | Shop




Architect: Cando Archineering Group ▼▲ Kafi Abadi Residential / Architect: Bonsar Office




Sira R 6090


Light distributions




Accessories

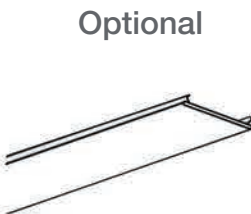

Solid Aluminium Cover
Order code:
White:2451215106
Black: 2451115106

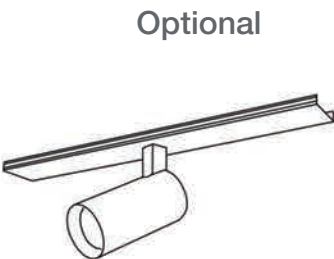

Merbora Mini
Refer to page 354

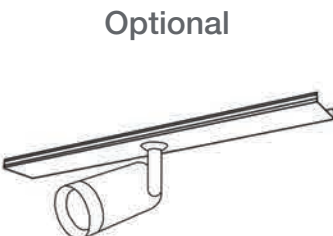

Arora
Refer to page 358

Order code table


Body Color	3000K	Length (cm)	4000K	Body Color
White	F452W3530W	114	F452W3540W	White
	F452W5030W	168	F452W5040W	

Body Color	3000K	Length (cm)	4000K	Body Color
Black	F452B3530W	114	F452B3540W	Black
	F452B5030W	168	F452B5040W	

The above order table code is for standard lengths of 114 and 168 cm. To order other lengths, than standard shapes, please refer to our sales support team to help you.



Sira S 6090

Linear Light

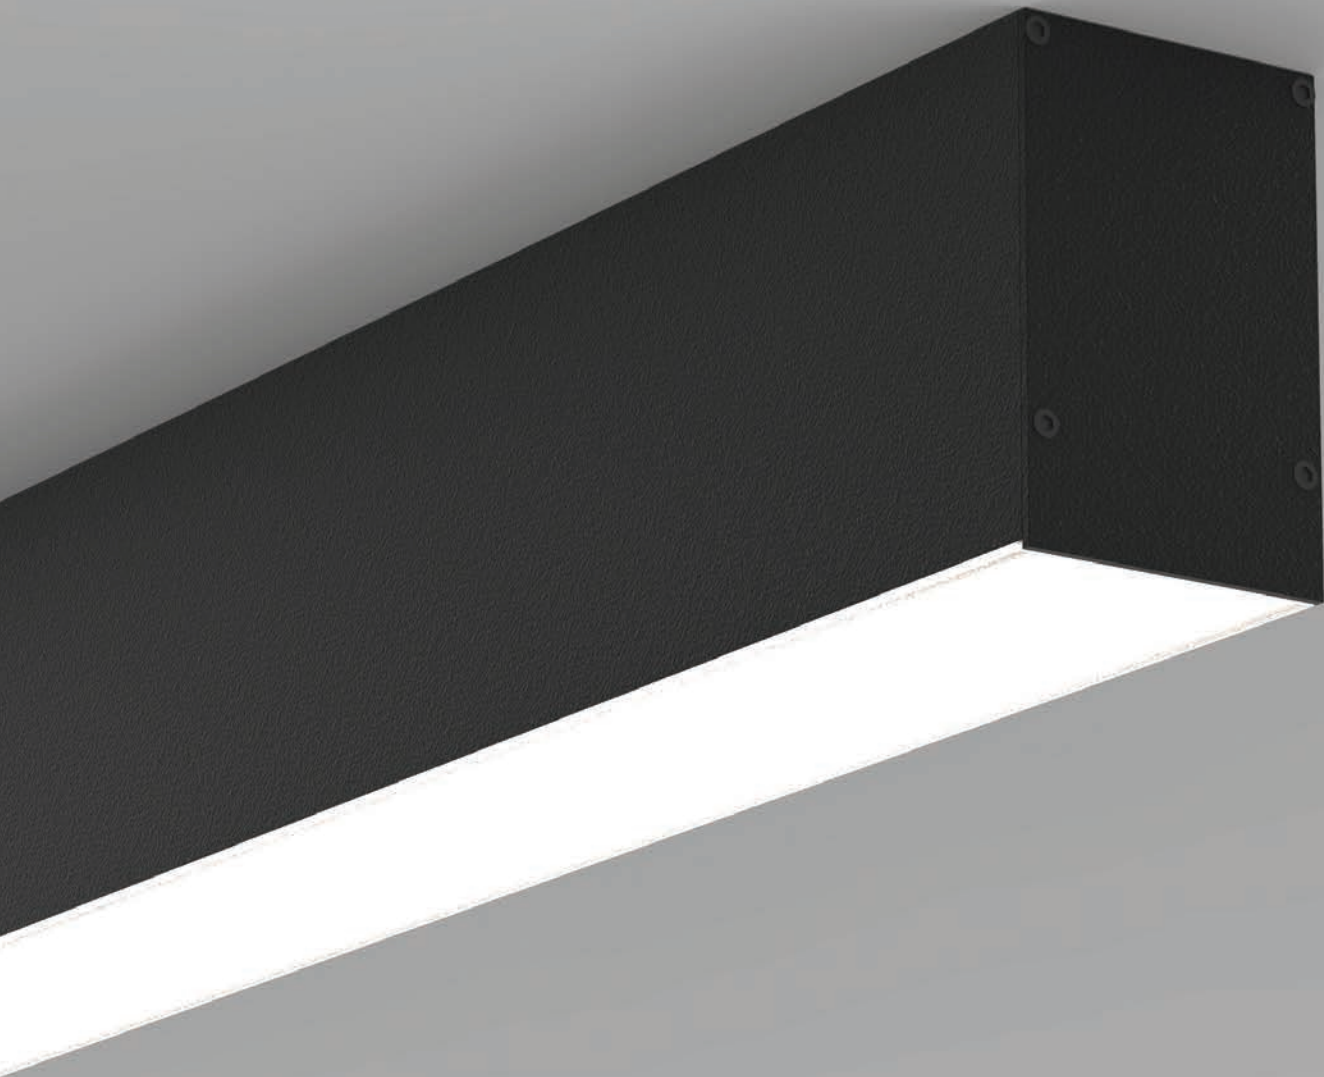

Continuous Linear light with 60 mm light emitting width

Sira S 6090

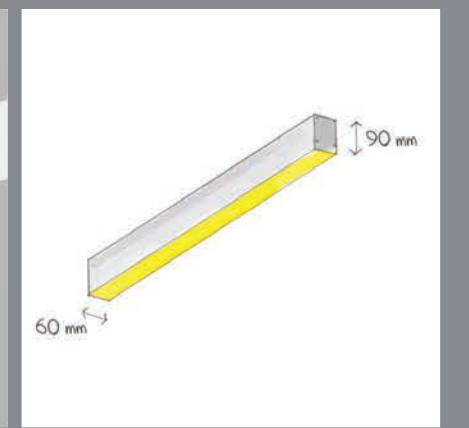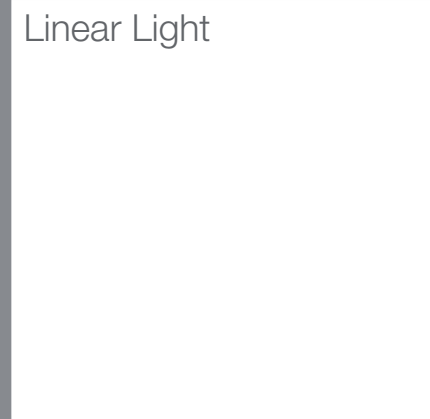

CODE	F451
Light source	LED
Power (W)	30 50*
luminous flux (lm)	4000
Color Rendering (Ra)	>80
Color Temperature (K)	3000 4000**
Body Color	White Black**

*Customized body colors and other color temperatures (CCTs) are available upon request



2.9 kg/m

127Ø x 100 cm

Supply Voltage:
220-240 Vac,50Hz

Driver:
DALI | Dimmable version available upon request

Recommended Applications:
Residential | Office | Shop




▲ JTI Office / Architect: Persian Garden 2018

Job Building / Architect: Mani Sadraei 2017 ▼




Sira S 6090

Light distributions



Accessories


Optional

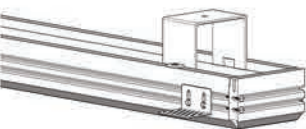

Trimless Installation Kit
Order code: 2451924125


For more details refer to installation details in our website

Optional

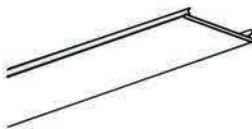


Solid Aluminium Cover
Order code:
White: 2451215106
Black: 2451115106

Optional

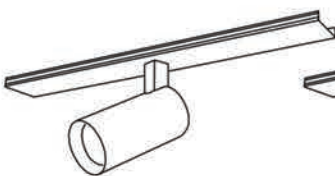

Merbora Mini
Refer to page 354

Optional

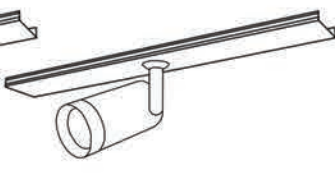

Arora
Refer to page 358


Order code table

Body Color	3000K	Length (cm)	4000K	Body Color
White	F451W3530W	114	F451W3540W	White
	F451W5030W	168	F451W5040W	
Body Color	3000K	Length (cm)	4000K	Body Color
Black	F451B3530W	114	F451B3540W	Black
	F451B5030W	168	F451B5040W	

The above order table code is for standard lengths of 114 and 168 cm. To order other lengths, than standard shapes, please refer to our sales support team to help you.

Sira P 6090

Linear Light

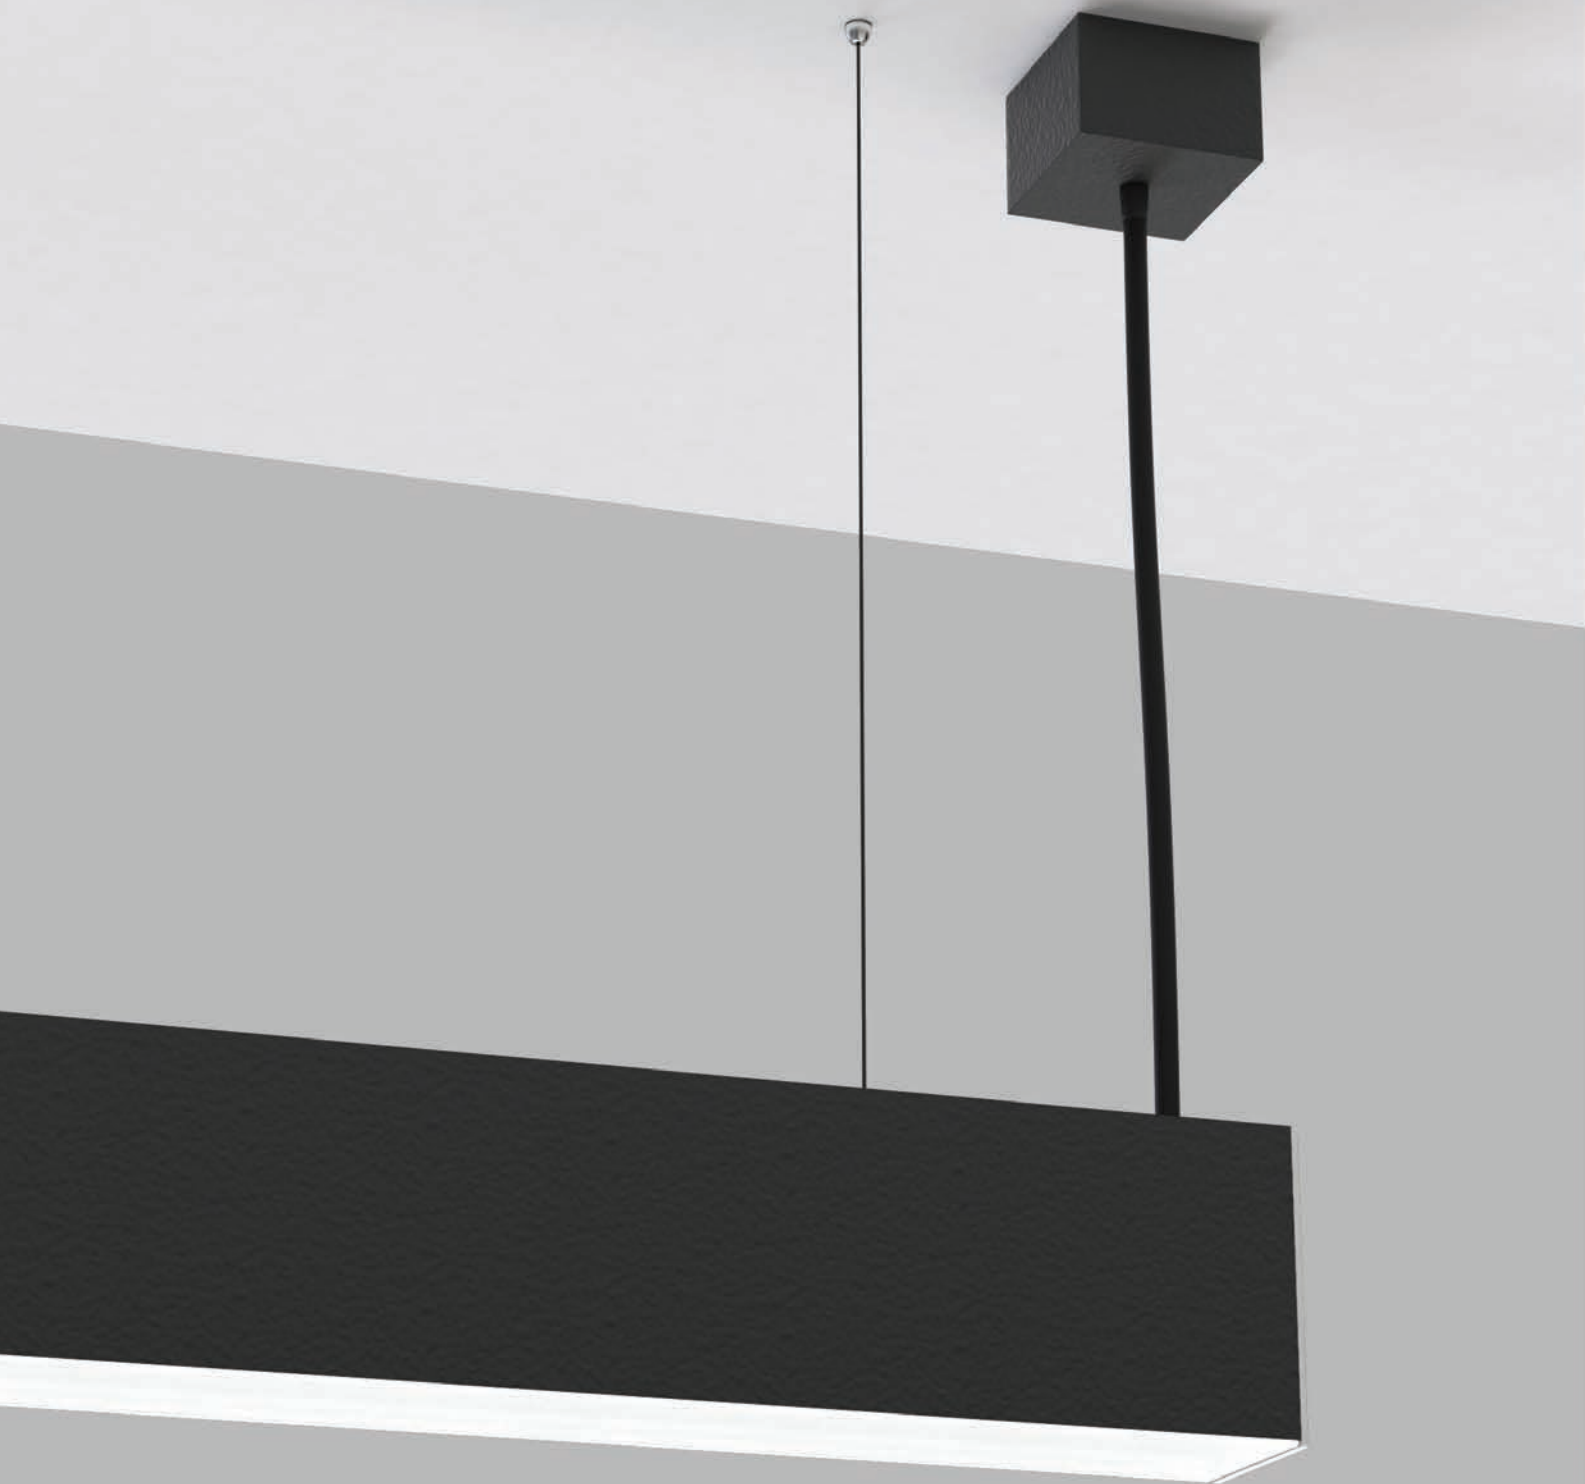

Continuous Linear light with 60 mm light emitting width

Sira P 6090

Linear Light



CODE	F453
Light source	LED
Power (W)	30 50*
luminous flux (lm)	4000
Color Rendering (Ra)	>80
Color Temperature (K)	3000 4000**
Body Color	White Black**

*Customized body colors and other color temperatures (CCTs) are available upon request
*114Cm:35W | 168Cm:50W

IP 20

KG 3.2 kg/m

127Ø x 100 cm

CE

III

Supply Voltage:
220-240 Vac,50Hz

Driver:
DALI | Dimmable version available upon request

Recommended Applications:
Residential | Office | Shop




▲ 7+1 Tree / Architect: Nezhoo Design Studio Bazargan Kala co. office architects: Elham Ebrahimi, Mojtaba Mirhos ▼




Sira P 6090

Light distributions



Accessories

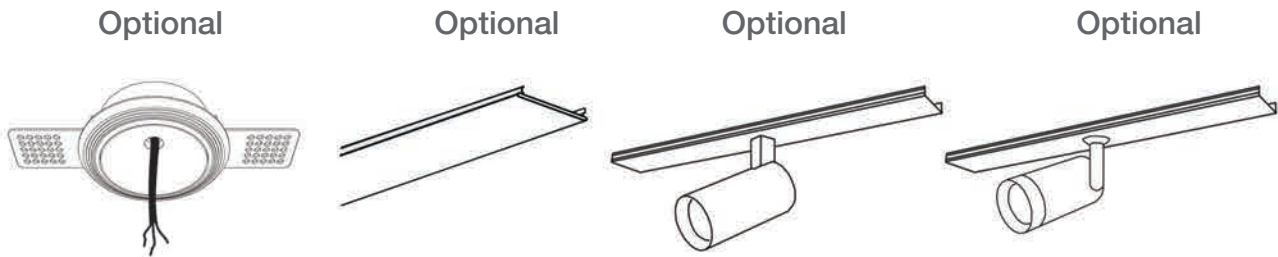

Trimless Cable Base
Order code: 2453224110

Solid Aluminium Cover
Order code:
White: 2451215106
Black: 2451115106

Merbora Mini
Refer to page 354

Arora Micro
Refer to page 358

Order code table

Body Color	3000K	Length (cm)	4000K	Body Color
White	F453W3530W	114	F453W3540W	White
	F453W5030W	168	F453W5040W	

Body Color	3000K	Length (cm)	4000K	Body Color
Black	F453B3530W	114	F453B3540W	Black
	F453B5030W	168	F453B5040W	

The above order table code is for standard lengths of 114 and 168 cm. To order other lengths, than standard shapes, please refer to our sales support team to help you.



Indoor Lighting

Complementary Products for Linear Lights

Merbora Micro 40

Optical Module



The specific design of the lower frame with its strip reduces the direct view of the light spot and glare

Merbora Micro 40

Optical Module



CODE	F430
Light source	LED
Power (W)	9
luminous flux (lm)	990
Color Rendering (Ra)	>80
Color Temperature (K)	3000 4000*
Body Color	White Black

*Customized body colors and other color temperatures (CCTs) are available upon request



0.25 kg



28 x 25 x 17 cm

Supply Voltage:

220-240 Vac, 50Hz

Driver:

DALI | Dimmable version available upon request

Recommended Applications:


Residential | Office | Shop






Merbora Micro 40

Light distributions



Spot(S)



Medium(M)

Order code table

Body Color	3000K	Beam Angle	4000K	Body Color
White	F430W930S	Spot	F430W940S	White
	F430W930M	Medium	F430W940M	

Body Color	3000K	Beam Angle	4000K	Body Color
Black	F430B930S	Spot	F430B940S	Black
	F430B930M	Medium	F430B940M	

Merbora Mini 60


Optical Module



Specific design of the bottom frame with it's strips reduce the direct view to the light point and of course glare

Merbora Mini 60

Optical Module

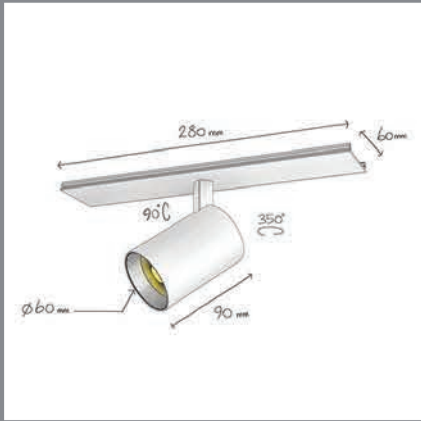

CODE	F432
Light source	LED
Power (W)	12
luminous flux (lm)	1300
Color Rendering (Ra)	>80
Color Temperature (K)	3000 4000*
Body Color	White Black

*Customized body colors and other color temperatures (CCTs) are available upon request

IP
20

KG

0.49 kg

28 x 25 x 17 cm

Supply Voltage:

220-240 Vac,50Hz

Driver:

DALI | Dimmable version available upon request

Recommended Applications:

Residential | Office | Shop

CE

KG

28 x 25 x 17 cm

Supply Voltage:

220-240 Vac,50Hz

Driver:

DALI | Dimmable version available upon request


Recommended Applications:

Residential | Office | Shop



Merbora Mini 60

Light distributions

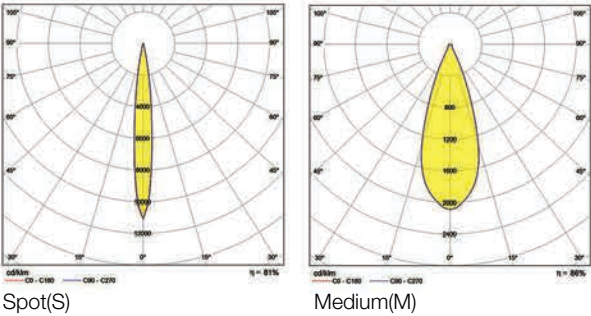

Order code table

Body Color	3000K	Beam Angle	4000K	Body Color
White	F432W1230S	Spot	F432W1240S	White
	F432W1230M	Medium	F432W1240M	

Body Color	3000K	Beam Angle	4000K	Body Color
Black	F432B1230S	Spot	F432B1240S	Black
	F432B1230M	Medium	F432B1240M	


Arora 60

Optical Module



Arora 60

Optical Module

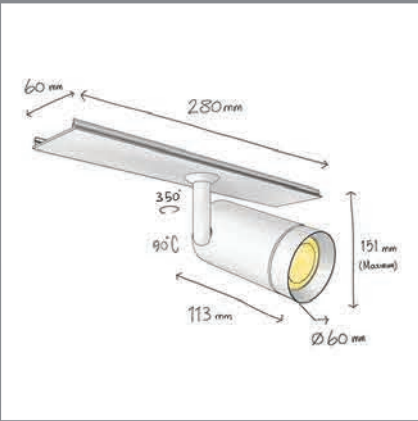

CODE	F436
Light source	LED
Power (W)	6
luminous flux (lm)	550
Color Rendering (Ra)	>80
Body Color	White Black

*Customized body colors and other color temperatures (CCTs) are available upon request

IP
20

KG

0.45 kg

28 x 25 x 17 cm

Supply Voltage:
220-240 Vac,50Hz

Driver:
DALI | Dimmable version available
upon request

Recommended Applications:
Residential | Office | Shop

CE

RoHS

The specific design of the lower frame with its strip reduces the direct view of the light spot and glare



Arora 60

Accessories

Mandatory



LED GU10 Lamp
Order code: 10020101

Order code table

Body Color	Order Code
White	F436WG
Black	F436BG

Indoor Lighting

Slot Systems


Krab 36

Krab




Krab 36

Krab

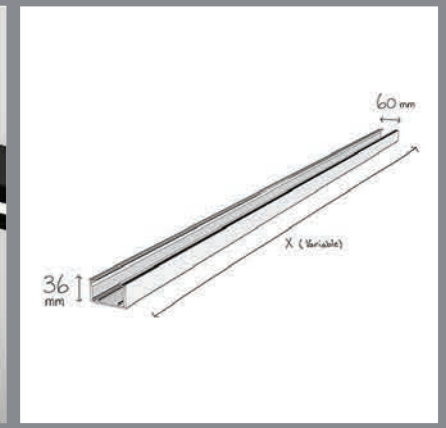

CODE	FE10
Body Color	Black



IP 20 113x113 mm CE

KG 0.97 kg/m

1270 x 100 cm

Recommended Applications:
Residential | Office | Shop

Accessories

Track



Refer to page 416



Charisma Holding / Architect: Dash Studio Office



Krab 16

Krab



Krab 16

Krab

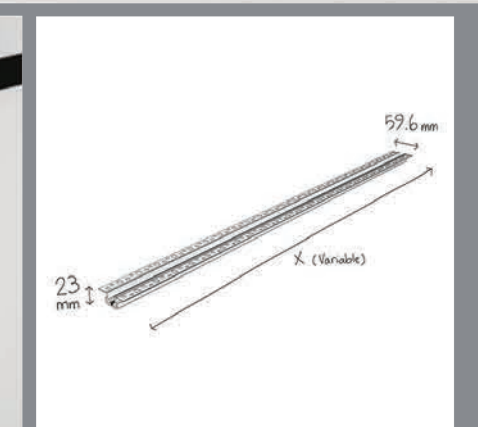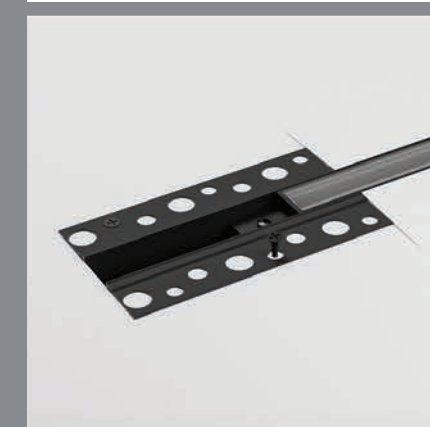


CODE	FE16
Body Color	Black

IP 20	31 x (X) mm	CE	□
-------	-------------	----	---

0.8 kg/m

127Ø x 100 cm

Recommended Applications:
Residential | Office | Shop







Indoor Lighting

Acoustic Pendant


Sirana 625

Acoustic Pendant



Sirana 625

Acoustic Pendant

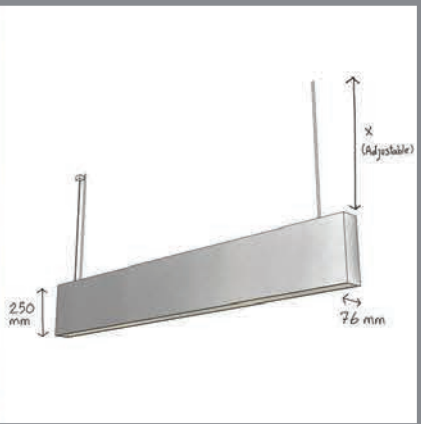

CODE	F840
Light source	LED
Power (W)	30 50
luminous flux (lm)	4000
Color Rendering (Ra)	>80
Color Temperature (K)	3000 4000*
Body Color	White Black

*Customized body colors and other color temperatures (CCTs) are available upon request

IP
20

KG

3 kg

1270

100 x 100 cm

Supply Voltage:

220-240 Vac, 50Hz

Driver:

DALI | Dimmable version available upon request

Recommended Applications:

Residential | Office | Shop | Museum | Gallery

CE

□




House of Innovaation and Technology, Kenya, in collaboration with Namad Studio ▼ ▲ Delfast Office, Kenya, In collaboration with Namad Studio



Sirana 625

Light distributions



Wide (W)

Order code table

Body Color	3000K	Beam Angle	4000K	Body Color
White	F840W3030W	114	F840W3040W	White
	F840W5030W	168	F840W5040W	

Body Color	3000K	Beam Angle	4000K	Body Color
Black	F840B3030W	114	F840B3040W	Black
	F840B5030W	168	F840B5040W	


Orma

Acoustic Pendant



Orma

Acoustic Pendant

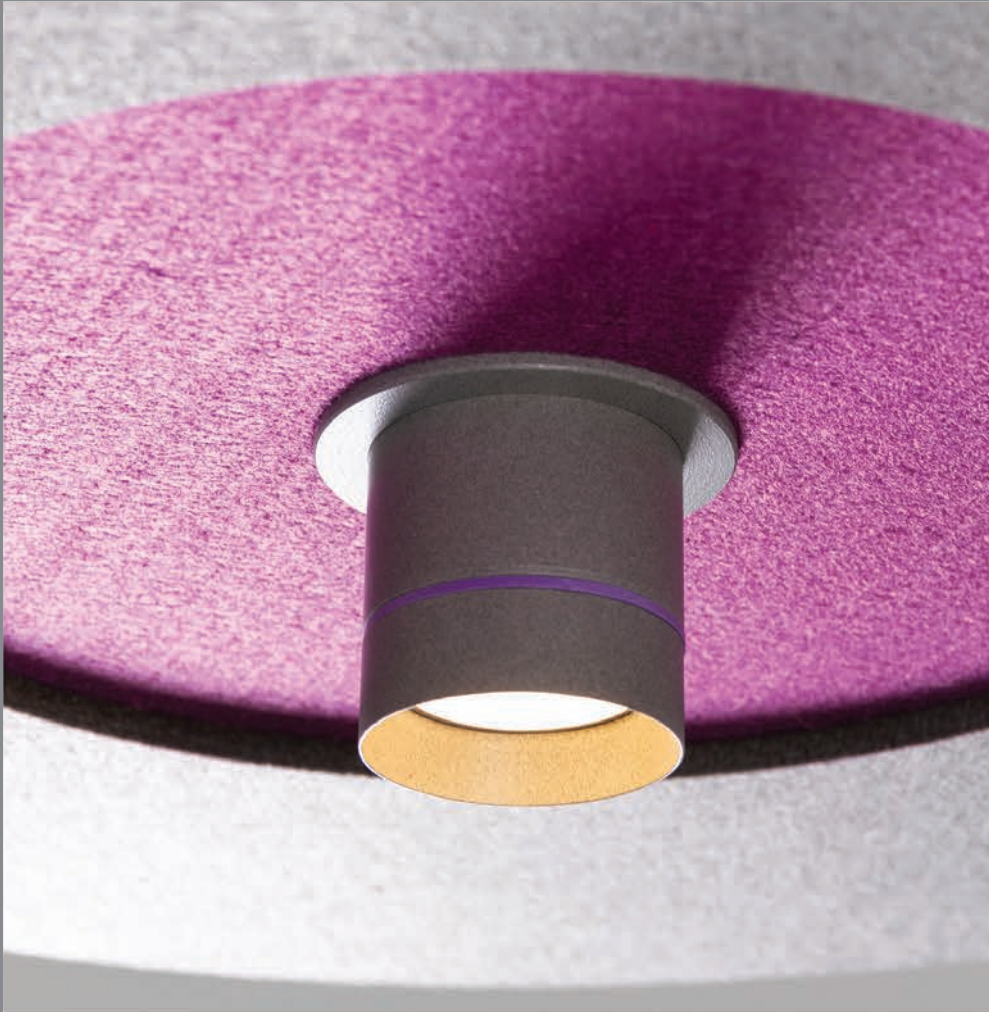

CODE	F830 F831
Light source	GU10 Lamp
Power (W)	6
luminous flux (lm)	550
Color Rendering (Ra)	>80
Color Temperature (K)	3000 4000*
Body Color	White Black

*Customized body colors and other color temperatures (CCTs) are available upon request



0.6 kg



100 x 100 x 20 cm



Supply Voltage:
220-240 Vac, 50Hz

Driver:
DALI | Dimmable version available upon request

Recommended Applications:
Residential | Office | Shop | Museum | Gallery



Orma

Accessories

Optional



LED GU10 Lamp
Order code: 10020101

Order code table

Body Color	Body Code	Orma40	Body Code	Body Color
White	F830WG		F830BG	Black

Body Color	Body Code	Orma60	Body Code	Body Color
White	F831WG		F831BG	Black

Felkana

Acoustic Pendant



Felkana

Acoustic Pendant



CODE	F856
Light source	LED
Power (W)	30
luminous flux (lm)	3300
Color Rendering (Ra)	>80
Color Temperature (K)	3000 4000*
Body Color	White Black

*Customized body colors and other color temperatures (CCTs) are available upon request

IP 20

KG

1.9 kg

Box

125 x 125 x 20 cm

Supply Voltage:

220-240 Vac, 50Hz

Driver:

DALI | Dimmable version available upon request

Recommended Applications:

Residential | Office | Shop | Museum | Gallery






▼ ?????



Felkana

Light distributions

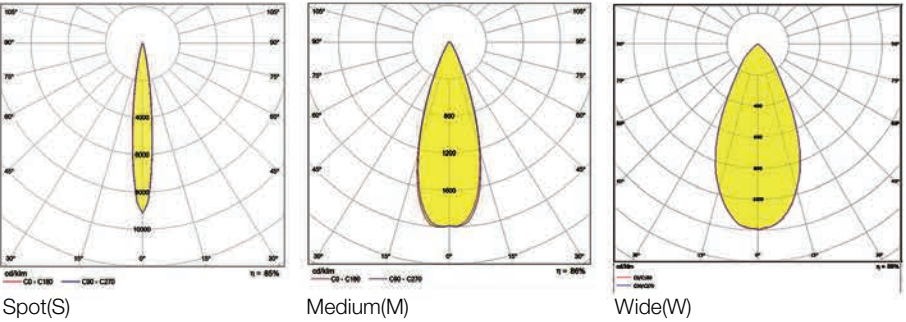

Order code table

Body Color	3000K	Beam Angle	4000K	Body Color
White	F856W3030S	Spot	F856W3040S	White
	F856W3030M	Medium	F856W3040M	
	F856W3030W	Wide	F856W3040W	

Body Color	3000K	Beam Angle	4000K	Body Color
Black	F856B3030S	Spot	F856B3040S	Black
	F856B3030M	Medium	F856B3040M	
	F856B3030W	Wide	F856B3040W	

A rooftop terrace at night, illuminated by warm white string lights and wall sconces. The terrace features a brick bar with a countertop, a round glass table with four wire mesh chairs, and a brick wall on the right. The sky is a deep blue, and distant city lights and mountains are visible in the background.

Outdoor Lighting

Fenos products are used in several outdoor lighting projects. Different products with different beam angles are available for professional applications like facade lighting or illumination of gardens.

Vaswa Micro


Exterior Projector



Compact and powerful
Small projector for facade and garden lighting

Vaswa Micro

Exterior Projector

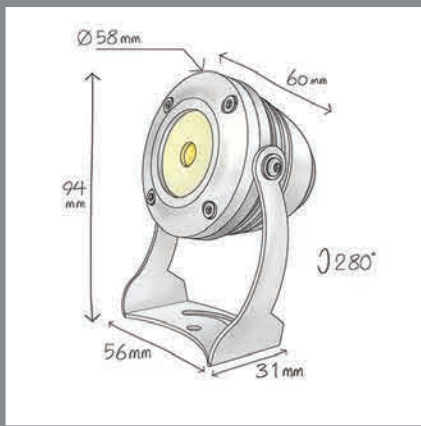

CODE	F902
Light source	LED
Power (W)	5
luminous flux (lm)	800
Color Rendering (Ra)	>80
Color Temperature (K)	3000 4000*
Body Color	Gray*

*Customized body colors and other color temperatures (CCTs) are available upon request

IP
65

CE



KG

0.22 kg



17 x 13 x 9 cm

Supply Voltage:

220-240 Vac, 50Hz

Driver:

DALI | Dimmable version available upon request

Recommended Applications:


Residential | Office | Shop | Facade Lighting | Garden



GreenLand / Architect: Mehrdad Iravanian

Vaswa Micro

Light distributions

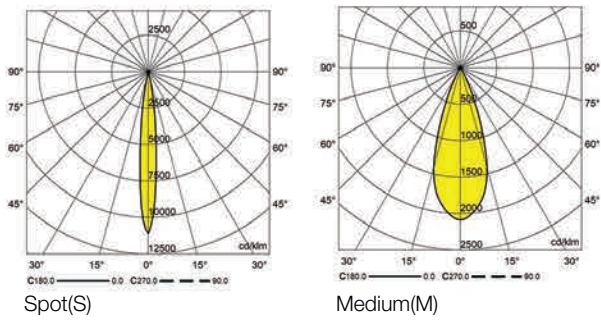

Order code table

Body Color	3000K	Beam Angle	4000K	Body Color
Gray	F902G530S	Spot	F902G540S	Grey
	F902G530M	Medium	F902G540M	

Vaswa Midi

Exterior Projector



Compact and powerful
Small projector for facade and garden lighting

Vaswa Midi

Exterior Projector



CODE	F900
Light source	LED
Power (W)	8
luminous flux (lm)	800
Color Rendering (Ra)	>80
Color Temperature (K)	3000 4000*
Body Color	Gray*

*Customized body colors and other color temperatures (CCTs) are available upon request

IP
65

KG

0.86 kg

Box

20 x 16 x 12 cm

Supply Voltage:

220-240 Vac, 50Hz

Driver:


DALI | Dimmable version available
upon request

Recommended Applications:

Residential | Office | Shop | Facade Lighting | Garden



Light distributions

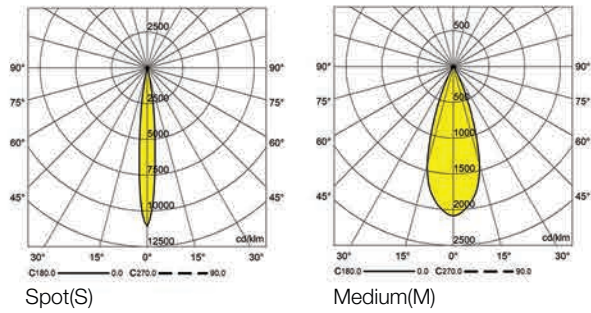

Order code table

Body Color	3000K	Beam Angle	4000K	Body Color
Gray	F900G830S	Spot	F900G840S	Grey
	F900G830M	Medium	F900G840M	



▲ Sadr Highway
Architect: Hegza Consulting Engineering 2014



▼ Bank Melli Ferdowsi
Architect: Padiav Parth Architects 2017



▲ Green Land
Architect: Mehrdad Iravanian 2014

Vaswa Maxi


Exterior Projector



For facade and landscape
For delightful outdoor atmosphere

Vaswa Maxi

Exterior Projector

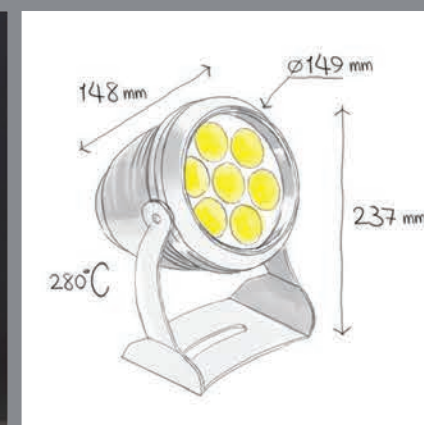

CODE	F905
Light source	LED
Power (W)	12
luminous flux (lm)	1320
Color Rendering (Ra)	>80
Color Temperature (K)	3000 4000*
Body Color	Gray*

*Customized body colors and other color temperatures (CCTs) are available upon request



3.0 kg



28 x 25 x 17 cm

Supply Voltage:

220-240 Vac, 50Hz

Driver:

DALI | Dimmable version available
upon request

Recommended Applications:

Residential | Office | Shop | Facade Lighting | Garden






Bank Mellî Ferdowsi / Padiav Parth Architects ▲ ▼ Hana Boutique Hotel / Architect: Persian Garden 2018



Vaswa Maxi

Light distributions



Order code table



Body Color	3000K	Beam Angle	4000K	Body Color
Gray	F905G1230XS	Extreme Spot	F905G1240XS	Gray

Silva Midi

Floor Surface



Silva Midi

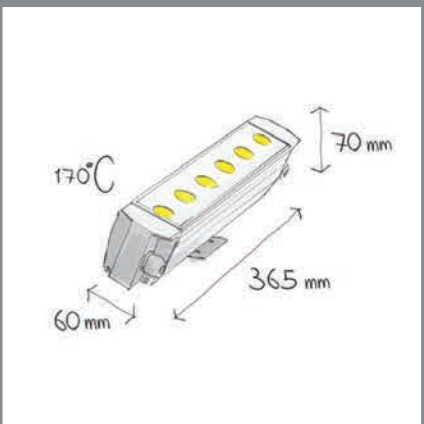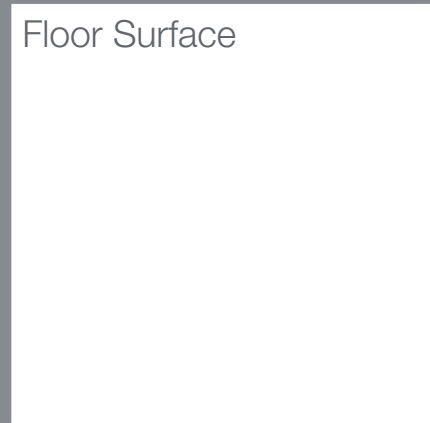

CODE	F920
Light source	LED
Power (W)	13
luminous flux (lm)	1400
Color Rendering (Ra)	>80
Color Temperature (K)	3000 4000*
Body Color	Silver*

*Customized body colors and other color temperatures (CCTs) are available upon request



1.3 kg



1270 x 40 cm




Supply Voltage:
220-240 Vac,50Hz

Driver:
DALI | Dimmable version available
upon request

Recommended Applications:
Residential | Office | Shop | Facade Lighting

Light distributions

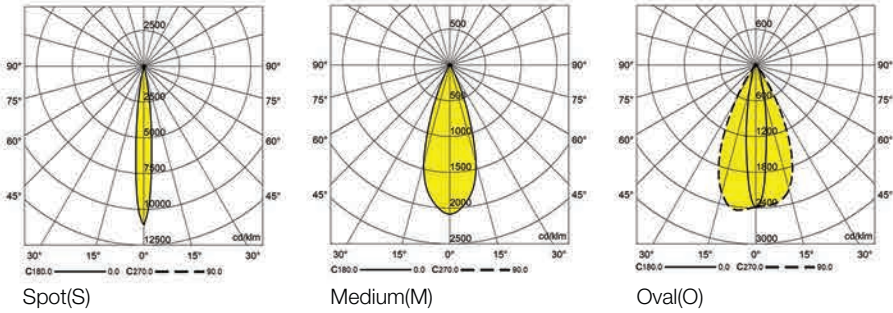

Order code table

Body Color	3000K	Beam Angle	4000K	Body Color
Silver	F920S1330S	Spot	F920S1340S	Silver
	F920S1330M	Medium	F920S1340M	
	F920S1330O	Oval	F920S1340O	



▲ Charsou / Architect: Bonsar Office 2014

Baguette Restaurant / Architect: Parsa Ardani & Ramin Beyraghdar ▼





Silva Maxi

Floor Surface



Professional outdoor compact linear light with different light distributions

Silva Maxi

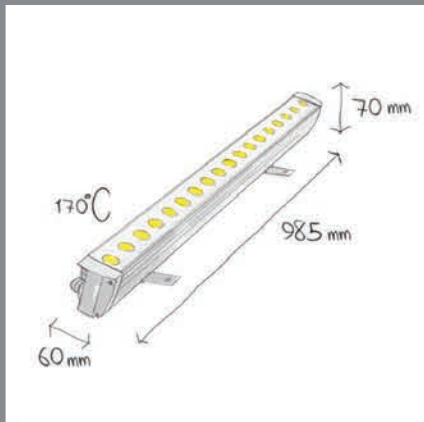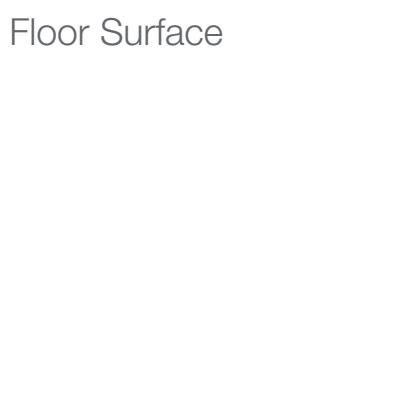

CODE	F925
Light source	LED
Power (W)	40
luminous flux (lm)	3240
Color Rendering (Ra)	>80
Color Temperature (K)	3000 4000*
Body Color	Silver*

*Customized body colors and other color temperatures (CCTs) are available upon request



3.4 kg



1270 x 100 cm

Supply Voltage:
220-240 Vac, 50Hz

Driver:
DALI | Dimmable version available upon request

Recommended Applications:
Residential | Office | Shop | Facade Lighting






Park Center / Architect: Bonsar Office 2016

Silva Maxi

Light distributions

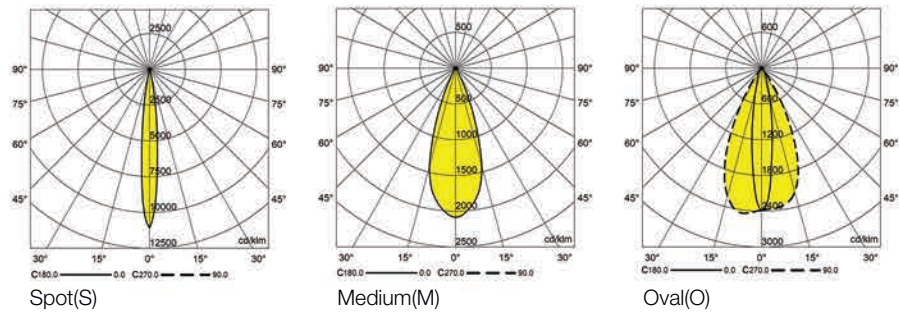

Order code table

Body Color	3000K	Beam Angle	4000K	Body Color
Silver	F925S4030S	Spot	F925S4040S	Silver
	F925S4030M	Medium	F925S4040M	
	F925S4030O	Oval	F925S4040O	

*Customized body color and other light distribution are also available upon request

Torso

Wall Mounted



For facade and landscape
For delightful outdoor atmosphere

Torso

Wall Mounted



CODE	F940
Light source	LED
Power (W)	2x6
luminous flux (lm)	2x600
Color Rendering (Ra)	>80
Color Temperature (K)	3000 4000*
Body Color	White Black Gray*

*Customized body colors and other color temperatures (CCTs) are available upon request



0.73 kg



20 x 16 x 12 cm

Supply Voltage:

220-240 Vac, 50Hz

Driver:

DALI | Dimmable version available
upon request

Recommended Applications:

Residential | Facade Lighting






Aban Residential / Architect: Gozar Andishe 2019

Torso

Light distributions



Accessories

Optional



Double LED GU10 Lamp
Order code: 10020101

Order code for GU10 version*

Body Color	Order Code
White	F940WG
Black	F940BG
Gray	F940GG

.Lamp is not included



Accessories

Accessories



Surface Track 3Phase

Body Color	Order Code	Lenght(m)	Order Code	Body Color
White	25106	1	25102	Black
	25206	2	25202	
	25306	3	25302	
	25406	4	25402	



End Cap

Body Color	Order Code	Body Color
White	555112171 555112172	Black



End Feed(earth right)

Body Color	Order Code	Body Color
White	555112011 555112012	Black



End Feed(earth left)

Body Color	Order Code	Body Color
White	555112021 555112022	Black



X Coupler(with feeding option)

Body Color	Order Code	Body Color
White	555112161 555112162	Black

Accessories



L Coupler(with feeding option earth outside)

Body Color	Order Code	Body Color
White	555112091 555112092	Black



L Coupler(with feeding option earth inside)

Body Color	Order Code	Body Color
White	555112101 555112101	Black



I Coupler(with feeding option)

Body Color	Order Code	Body Color
White	555112081 555112082	Black



Flex Coupler(30 to 330 degree with feeding option)

Body Color	Order Code	Body Color
White	555112111 555112112	Black



T Coupler(with feeding option earth inside right)

Body Color	Order Code	Body Color
White	555112121 555112122	Black

Accessories



T Coupler(with feeding option earth inside left)

Body Color	Order Code		Body Color
White	555112131	555112132	Black



T Coupler(with feeding option earth outside right)

Body Color	Order Code		Body Color
White	555112141	555112142	Black



T Coupler(with feeding option earth outside left)


Body Color	Order Code		Body Color
White	555112151	555112152	Black




Beno LED Strips

Order Code	Power(W/m)	Voltage(V)	CCT(K)
F800-1030-2420	10	24 V-DC	3000
F800-1040-2420	10	24 V-DC	4000
F800-1030-2465	10	24 V-DC	3000
F800-1040-2465	10	24 V-DC	4000

Earth Run Layout Help

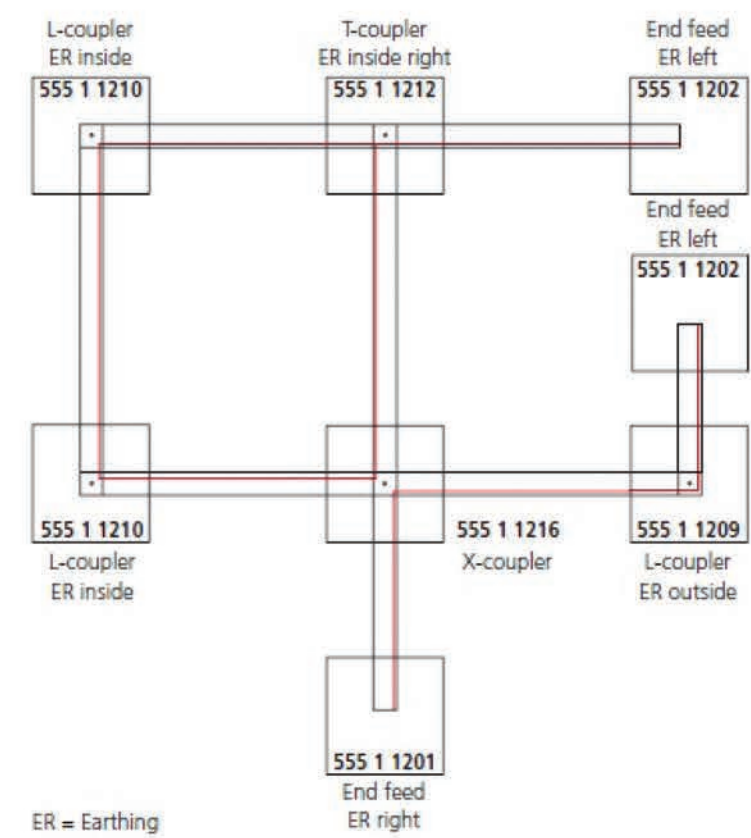

Surface Track 3Phase Mechanical Load

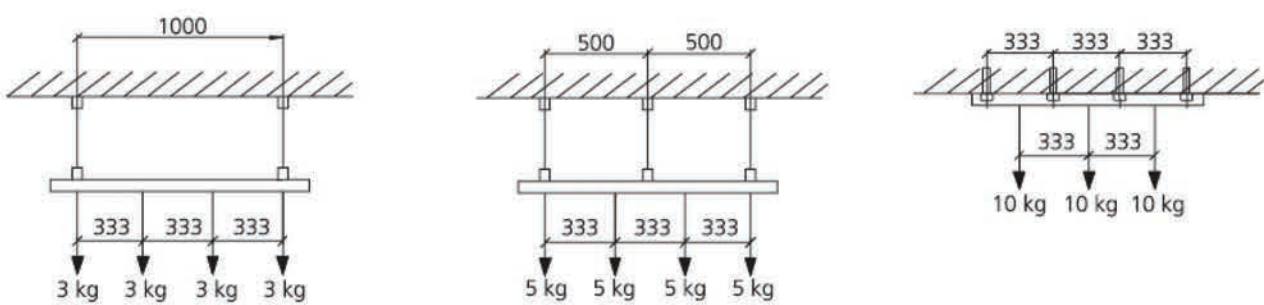


3- track wiring diagram

a) Connection to AC 230V (220 - 240V)
maximum load: 3.600 W (3.500 - 3.800 W)
Total load can spread on any circuit

fuse
power supply cable
power supply cable

1 x 16 A
min. 3 x 1.5 mm²
min. 3 x 2.5 mm²

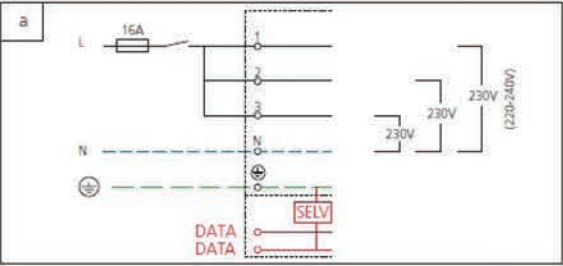



Hana Boutique Hotel



Architect: Persian Garden Studio












Guide To Fenos Products Coding

F	115	B	20	40	M
Fenos	Product Family Code	Body Color	Power Consumption(w)	CCT(K)	Beam Angle
	e.g Vera: 300 Felka Mini: 315	B: Black W: White S: Silver G: Gray WB: White-Black	e.g Vera: 35 Felka Mini: 12	27: 2700K 30: 3000K 40: 4000K 60: 6000K	XS: Extreme Spot S: Spot SM: Spot-Medium M: Medium MW: Medium Wide W: Wide WW: Wall Washer DW: Double Wallwasher O: Oval

Alephabetic index

Armo Maxi & BS Version	258	Fitran Q	118	Silva Maxi	404
Aro	276	Fitran Q TR	122	Silva Midi	400
Aro CW	204	Fitran Q TR Twin	126	Sira OL	310
Aro P	232	Krab 16	366	Sira P 4090	324
Aro RA	164	Krab 36	362	Sira P 6090	342
Aro S	188	Merbo Maxi	250	Sira R 1616	298
Aro SA	192	Merbo Micro	238	Sira R 4040	314
Arora 60	356	Merbo Micro CW-DR	196	Sira R 6040	328
Belta	272	Merbo Micro CW-DS	200	Sira R 6090	332
Darklans	26	Merbo Micro RA	152	Sira S 1616	306
Eyden Mini	110	Merbo Micro RA Twin	156	Sira S 4090	320
Eyden Mini TR	114	Merbo Midi	246	Sira S 6090	336
Eyren Maxi	52	Merbo Mini	242	Sira TR 1616	294
Eyren Micro	40	Merbo Mini RA	160	Sira V 1616	302
Eyren Midi	48	Merbora Micro 40	348	Sirana 625	374
Eyren Mini	44	Merbora Mini 60	352	Tiran C Mini	82
Felka Maxi P	228	Nian	86	Tiran S	130
Felka Maxi S	184	Orma	378	Tiran S TR	134
Felka Micro P	216	Oyan	32	Tiran S TR Twin	138
Felka Micro S	172	Risen	264	Torso	408
Felka Midi P	224	Roni WW	90	Valman	94
Felka Midi S	180	Sibron C Maxi	68	Valman S	208
Felka mini	262	Sibron C Micro	56	Valman T	260
Felka Mini P	220	Sibron C Midi	64	Vaswa Maxi	396
Felka Mini S	176	Sibron C Mini	60	Vaswa Micro	388
Felkana	382	Sibron CF-TR	72	Vaswa Midi	392
Filde Micro	142	Sibron Q Maxi	106	Zhiwer	36
Filde Mini	146	Sibron Q Midi	102		
Fitran C Mini	78	Sibron Q Mini	98		

Guide To selection of the right beam angle, depending on the object size and distance from the light source

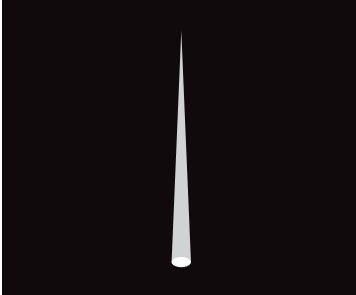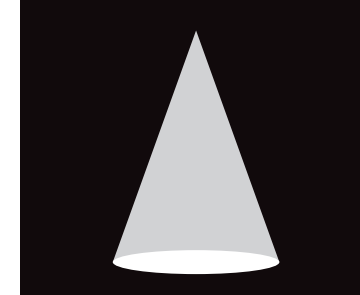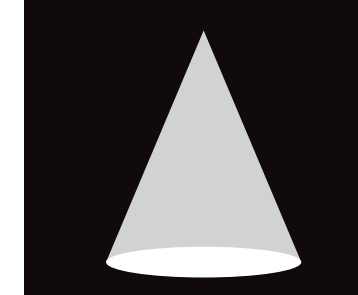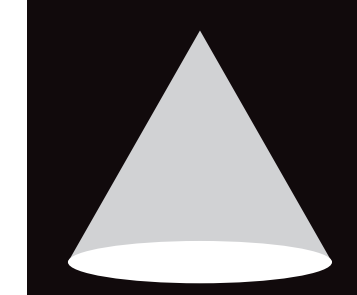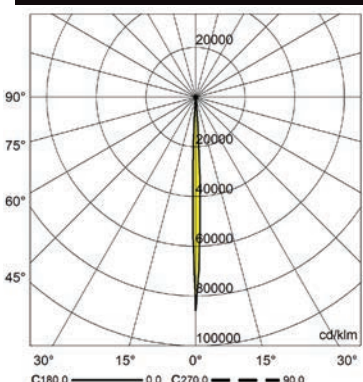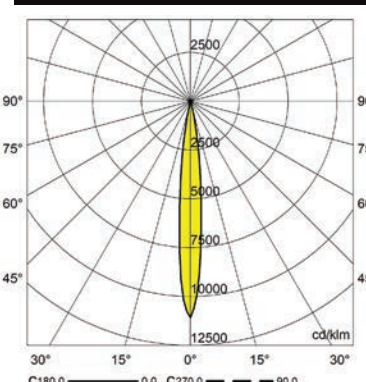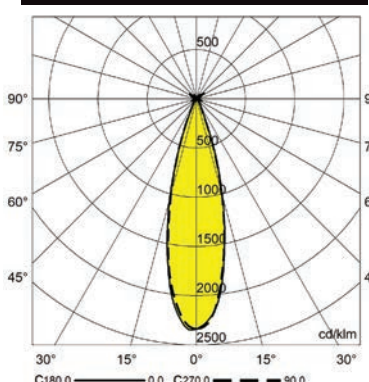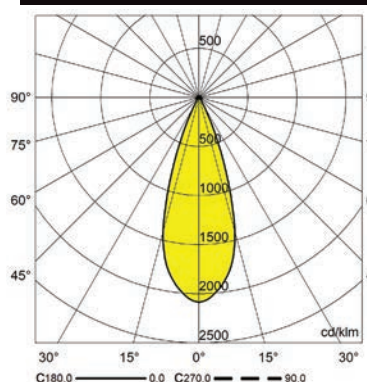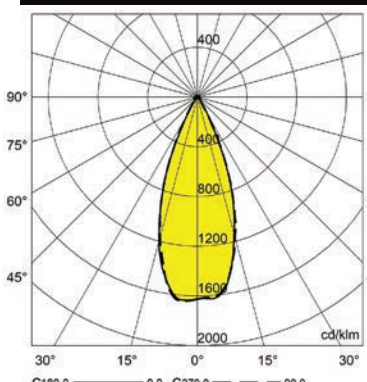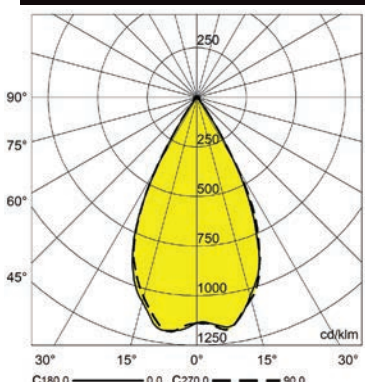Beam Angle	Extreme Spot		Spot		Spot Medium		Medium		Medium Wide		Wide		
	XS		S		SM		M		MW		W		
													
	<8 Degree		10-15 Degree		20-30 Degree		30-40 Degree		40-50 Degree		>50 Degree		
													
The diameter of the illuminated area at the distance of 2m	20 cm		50 cm		80 cm		140 cm		160 cm		230 cm		
Objects													
	Shoe Bag Small Sculpture		Vase Small Paintings Home Applications		Coat Medium Sculpture 3 Person Table		Mannequins Small Size Carpet Medium Size Tree		Automobile Big Painting Big Size Tree		Big Sculpture Big Painting Carpet		
Recommended products from Fenos	Felka Mini XS Fitro XS Nian XS Vaswa Maxi XS		Felka Mini S Roni S Sibron C Mini S Sibron CF-TR S Tiran S Vaswa Midi S		Felka Mini SM Tiran S		Felka M Sibron C M Sibron Cf-TR M Vaswa Midi M		Felka Maxi M Felka Mini M Pelka M Vera M Vera Twin M		Felka Mini W Roni W		
Diameter to distance Ratio (DdR)	0.1		0.25		0.4		0.7		0.8		1.15		
Diameter to distance Ratio (DdR)													

Installation Instruction

Trimless Lights

